

Domestic and Non-Domestic Applications

Ecovector™

Patent Pending



The next generation fan convector with elegant styling. Using only 5% of the water content of an equivalent output radiator Ecovector is fast, responsive, energy efficient and very quiet in operation. Provides warmth from the floor upwards – the ideal heating pattern – but is more effective and energy efficient than either under-floor heating or conventional radiators. Very compact – half the width of a similar radiator. Manufactured in the UK using recyclable materials.

Model	Room Size Guide* (m ²)	Heat Output Δt 60°C		Heat Output Δt 50°C		Heat Output Δt 20°C		Casing Colour	Fan-Only
		Low kW (Btu/h)	High kW (Btu/h)	Low kW (Btu/h)	High kW (Btu/h)	Low kW (Btu/h)	High kW (Btu/h)		
Hydronic Ecovector LL 1200	27	1.2 (4000)	1.6 (5406)	1.0 (3400)	1.3 (4300)	0.4 (1200)	0.5 (1600)	White	n/a
Hydronic Ecovector LL 2000	45	2.0 (6900)	2.6 (8800)	1.6 (5500)	2.2 (7600)	0.7 (2500)	0.9 (2900)	White	n/a
Hydronic Ecovector LL 2800	62	2.8 (9700)	3.5 (12100)	2.3 (8000)	2.9 (10000)	1.0 (3200)	1.2 (4200)	White	n/a

*Room sizes given in cubic metres for general guidance only based on low heat output (Δt 60°C) for domestic applications only. Δt 60°C assumes a mean water temperature of 80°C and room temperature of 20°C. Δt 50°C assumes a mean water temperature of 70°C and room temperature of 20°C. Δt 20°C assumes a mean water temperature of 40°C and room temperature of 20°C. Hydronic outputs tested in accordance with BS 4856. Fan-only option operational only when central heating system is switched off.

Model	Flow & Return Connections	Mains Cable	Transformer	Flexible Hoses	Isolating Valves	Fused Spur	Power Consumption		Water Capacity (Litres)
							Normal Watts	Boost Watts	
Hydronic Ecovector LL 1200	15mm	1.5m	n/a	n/a	n/a	3A	17	21	0.29
Hydronic Ecovector LL 2000	15mm	1.5m	n/a	n/a	n/a	3A	26	55	0.58
Hydronic Ecovector LL 2800	15mm	1.5m	n/a	n/a	n/a	3A	43	76	0.83

Ecovector™

Finish

Front casing: zinc coated steel. Polyester powder-coated: textured white BS 4800 00A01 18% gloss.

Side panels: polymer eggshell white

Installation

- Mounting bracket supplied
- Unit must be earthed
- Suitable for two-pipe central heating systems
- Minimum height above floor level 150mm
- Maximum height above floor level 500mm

Commissioning


Check water is hot enough to activate the selectable low temperature cut-out thermostat.

Controls

Rocker switch - normal/off/boost.

Built-in room thermostat.

Selectable low temperature cut-out thermostat, set to 38°C for heating systems run from renewable technology and 52°C for standard and condensing boiler heat generators.

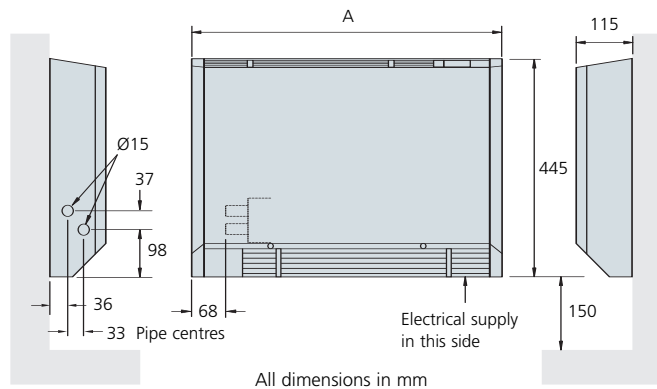

Model	A
LL 1200	635
LL 2000	1025
LL 2800	1385