

LUCY 18 ELECTRIC





- · Vertical collectors in painted mild steel ø 30 mm.
- Horizontal heating elements in painted mild steel ø 18 mm.
- · Heat transfer fluid.

Brackets, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick walls, user notice.

The kit is certified from TÜV in compliance with VDI 6036 - class 4.

The radiator is protected by recyclable carton box. User notice included.

ELECTRICAL ONLY:

✓ With WiFi digital thermostat

With PLUS digital thermostat

With ECO digital thermostat

PAINTING PROCESS:

Painted with ecological epoxy powders (Certificate DIN 55900-1,-2).

COLOURS:

See colour chart.

ACCESSORIES:

For the complete list, please refer to the accessories chapter.

Class protection: CLASS 1

Minimum ingress protection: IP 44

Wire lenght: 1200 mm with Schuko plug (with WiFi or ECO digital thermostat)

Wire lenght: 800 mm with Schuko plug (with PLUS digital thermostat)

Power supply: 230Vac 50Hz (with WiFi or PLUS digital thermostat)

Power supply: 230Vac 50/60Hz (with ECO digital thermostat)

Seasonal energy efficiency η_s: 39% (with WiFi digital thermostat)


Seasonal energy efficiency η_c: 38% (with PLUS or ECO digital thermostat)

CERTIFICATES





HOW TO PLACE ELECTRIC RADIATORS



The national rules on installing electrical equipment in the bathroom must be scrupulously respected. The electric radiators must be always installed outside zone 1 and 2.

In particular the electric switch and control elements must be mandatorily located in zone 3, in order that no electrical control center is accessible to a anyone using the shower or bath.



All Cordivari electric radiators are in line with the new European regulation UE 2015/1188. The new regulation imposes a seasonal energy efficiency of electrical appliances for ambient heating with a nominal thermal output over 250 W and not less than 38%. Each of the ErP electric radiator is equipped with at least electronic temperature control, window opening detection and weekly programmer.

INCLUDED



Remote control of PLUS digital chrono-thermostat

Remote control of PLUS digital chrono-thermostat funtioning

ACCESSORIES



Kit 2 hooks

white R01



Art. nr. 5991990310388



Towel bar painted mild steel white R01


Art. nr. 5991990331126


If ordered separately from the radiator, the accessories are available in standard white only


Art. nr. are referred to colour WHITE R01


















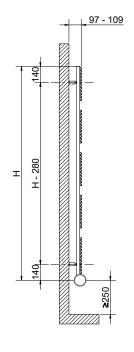

NEW

(*) Pipe center (I) measure of the fixing kit

O The general footprint has to be calculated considering the thermostat height


| DIGITAL THERMOSTAT WIFI | |
|-------------------------|---|
| 75 |) |

| works with | works with the Google Assistant |
|---------------|---------------------------------|
| alexa | App Store Caselle pay |

| | | 10 | / 1 | 8 | FI | F(| TRIC | `WIF |
|--|--|----|-----|---|----|----|------|------|
|--|--|----|-----|---|----|----|------|------|


| LO 0 1 10 | | | | | |
|----------------|-----------------|----------------------------------|---------------|------------------|----------------|
| Height [mm] | Width L [mm] | Fixing kit center distance I (*) | Art. nr. | Output [Watt] | Weight [Kg] |
| 760 | 480 | 450 | 3581406100248 | 500 | 14 |
| 1160 | 480 | 450 | 3581406100249 | 700 | 22 |
| 1410 | 480 | 450 | 3581406100250 | 900 | 26 |
| 1885 | 480 | 450 | 3581406100251 | 1200 | 30 |

PRODUCT AVAILABLE FROM APRIL 2022



LUCY 18 ELECTRIC PLUS (remote control included)

| Height [mm] | Width L [mm] | Fixing kit center distance I (*) | Art. nr. | Output [Watt] | Weight [Kg] |
|----------------|-----------------|----------------------------------|---------------|------------------|----------------|
| 760 | 480 | 450 | 3581406100240 | 500 | 14 |
| 1160 | 480 | 450 | 3581406100241 | 700 | 22 |
| 1410 | 480 | 450 | 3581406100242 | 900 | 26 |
| 1885 | 480 | 450 | 3581406100243 | 1200 | 30 |



LUCY 18 ELECTRIC ECO

| Height [mm] | Width L [mm] | Fixing kit center distance I (*) | Art. nr. | Output [Watt] | Weight [Kg] |
|----------------|-----------------|----------------------------------|---------------|------------------|----------------|
| 760 | 480 | 450 | 3581406100230 | 500 | 14 |
| 1160 | 480 | 450 | 3581406100231 | 700 | 22 |
| 1410 | 480 | 450 | 3581406100232 | 900 | 26 |
| 1885 | 480 | 450 | 3581406100233 | 1200 | 30 |

