

Halo



Horizontal 133 diameter x 2000 in Matt Black 9005



Vertical 1800mm x 155mm diameter, shown in Metallic Silver with Pistol TRV's.

Halo shown on page 62-63

High quality Italian design & manufacture.
Steel; 87mm, 133mm, 155mm 180mm & 187mm fins
UKCA approved & certified to BS EN442

Matt White RAL 9016 as standard, 188 RAL colours plus 2 Special Finishes; Metallic Silver & Matt Black. Please call **01342 302250** for a RAL chart

Made to Order sizes & colours: Up to 7 weeks for white
Up to 7 weeks for colours, 9 weeks for chrome



SAVE MONEY! WHEN YOU BUY OUR
IDEAL TRV KIT WITH ANY DESIGNER
ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome

Halo Horizontal	Pipe centres left to right	Pipe centres from wall
Halo 130mm	width + valves	minimum of 65mm
Halo 190mm	width + valves	minimum of 90mm
Halo 250mm	width + valves	minimum of 120mm

Made to order options - Horizontal White & Colours


Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}C$	BTU's $\Delta t 50^{\circ}C$
130	1000	HALOI310	269	918
	1500	HALOI315	413	1409
	2000	HALOI320	557	1900
190	1000	HALOI910	401	1368
	1500	HALOI915	616	2102
	2000	HALOI920	831	2835
250	1000	HALO2510	993	3388
	1500	HALO2515	1490	5084
	2000	HALO2520	1969	6718

Made to order options - Horizontal Chrome

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}C$	BTU's $\Delta t 50^{\circ}C$
190	1000	HALOI910C	353	1204
	1500	HALOI915C	542	1849
	2000	HALOI920C	731	2494
250	1000	HALO2510C	874	2982
	1500	HALO2515C	1311	4473
	2000	HALO2520C	1733	5913

Made to order options - Horizontal Electric

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}C$
180	1015	HALOE1810	500
	1515	HALOE1815	750
	2015	HALOE1820	1000

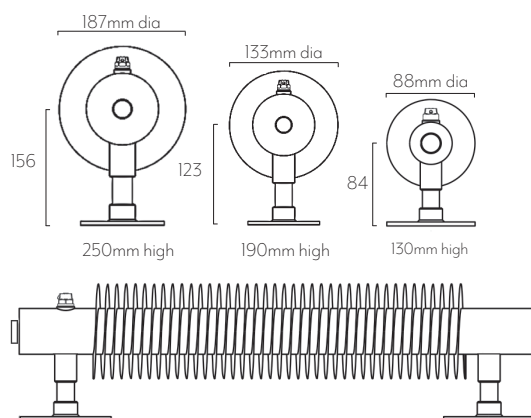


Halo Vertical	Pipe centres left to right	Pipe centres from wall	Depth from wall
Halo 155mm	60mm	148mm	225mm

Made to order options - Vertical White & Colours

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}C$	BTU's $\Delta t 50^{\circ}C$
1500	155	HALOV1515	865	2951
1800	155	HALOV1815	1040	3548
2000	155	HALOV2015	1153	3934

Made to order options - Vertical Chrome

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}C$	BTU's $\Delta t 50^{\circ}C$
1500	155	HALOV1515C	761	2597
1800	155	HALOV1815C	915	3122
2000	155	HALOV2015C	1015	3463

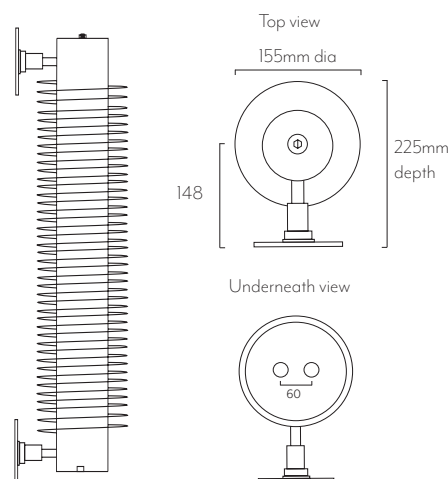

*Saving based on the value of individual items when bought separately.

Order any of our selected valves & matching pipe covers at the same time as your radiator; **PROMOVIW** (white), **PROMOVIC** (chrome).

Technical Specifications

Materials	Steel
Electrical Connection	5 amp fused fixed spur
IP rating	IP54
Testing authority	EN 60335-1 and EN 50366 + A1 (2006)
Max. working temperature	95°C
Packaging	Encased in polystyrene, seated within a cardboard box

Terms & Conditions

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage. The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

Guarantees & Liabilities

As we are not the manufacturers of this product we will take all reasonable endeavours to make over to you the benefit of any warranty or guarantee given by the manufacturer, which is usually 2 years on the electrical element, and 5 years for the radiator. (Copies of specific guarantees for any of our products are available on request).

The guarantees in all cases are subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantees in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

Fittings Instructions



Please read these instructions and terms and conditions carefully prior to installation. Failure to do so may invalidate the warranty

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU






Electrical Element



Radiator

HALOE1.1

Technical Drawings

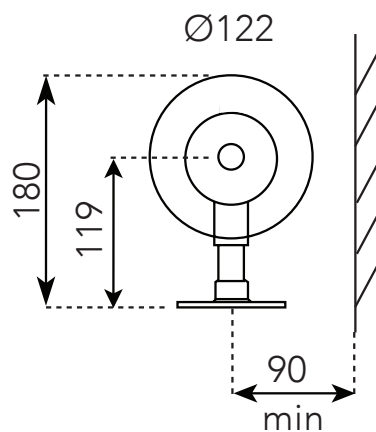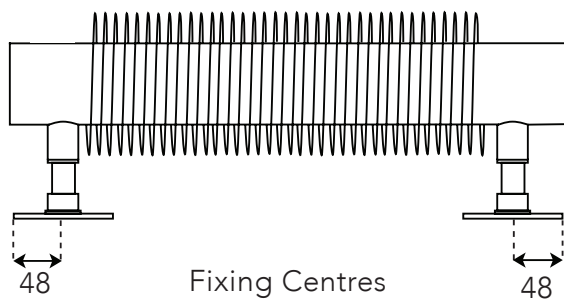

Please Note: this radiator can only be installed horizontally on the floor and cannot be installed in a bathroom.

Watts

Height	Width	Watts $\Delta 50^{\circ}\text{C}$
180	1015	500
180	1515	750
180	2015	1000

1 Unpack & Inspect

The Radiator Company prides itself on selecting products from manufacturers who exercise tight quality control measures. We only select models with excellent standards of welding and brazing, as well as high quality finishes. All of our products are well packaged and should reach you in perfect condition. Just in case however, we offer a minimum 5-year no quibble guarantee for all radiators and towel rails, and 2 years on electrical elements.

The Radiator Company must be notified of any shortages or damage within 28 days of delivery. For further information please see terms and conditions on back page.



2 Contents

You should have:

- 1 Radiator



You will need:

- 6 Screws; 4mm dia x 60mm
- Tape measure
- Screwdriver
- Electric drill
- Suitable drill bit

3 Fit Radiator

- 1) Accurately mark out holes for mounting feet on the floor
- 2) Once marked out, drill four holes to suit screws
- 3) Fix radiator to floor with suitable screws and plugs.

The electric element should only be fitted by a qualified electrician to the I.E.T regulations.

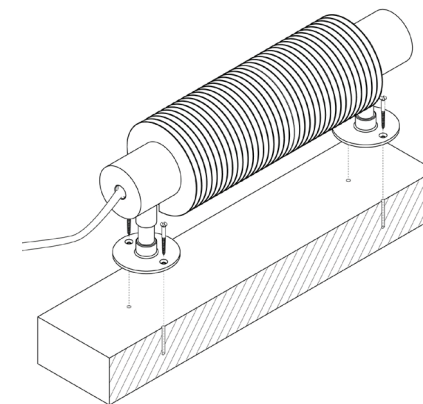

4 Commission Radiator

Please Note

This radiator should only be fitted by a qualified electrician in accordance with the I.E.T wiring regulations.

This radiator is not suitable to fitted in a bathroom.