

Sitar BDO



543mm x 1220mm in White with White 3 Style Corner valves

Sitar Lato

shown on page 102

High quality Italian design & manufacture.
Steel: 23mm cross tubes
UKCA approved & certified to BS EN442

White RAL 9016 as standard, 188 RAL Colours and 30 Special Finishes
Please call **01342 302250** for a RAL or Special Finish chart

Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks

Stock options White RAL 9016

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
832	500	SITLAT8350	394	1344
	600	SITLAT8360	455	1552
1348	500	SITLAT1350	612	2088
	600	SITLAT1360	708	2416

Made to order options

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
832	700	SITLAT8370	515	1757
1348	700	SITLAT1370	801	2733
1778	500	SITLAT1750	799	2726
	600	SITLAT1760	924	3153
	700	SITLAT1770	1044	3562


*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOV3W (white), PROMOV3C (chrome).



SAVE MONEY! WHEN YOU BUY OUR CYLINDER KIT WITH ANY TOWEL RAIL ORDER* QUOTE **PROMOV3** AT TIME OF ORDER

Available in White or Chrome

Pipe centres left to right
50mm
Pipe centres from wall
57mm - 67mm
Depth from wall
92mm - 102mm

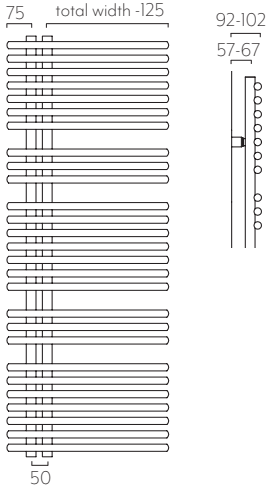

Sitar BDO

shown on page 103

High quality Italian design & manufacture
Steel: 23mm cross tubes
UKCA approved & certified to BS EN442

White RAL 9016 as standard, 188 RAL Colours and 30 Special Finishes
Please call **01342 302250** for a RAL or Special Finish chart

Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks

Stock options White RAL 9016

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
373	1220	SITBDO3712	517	1764
	1520	SITBDO3715	647	2208
543	1220	SITBDO5412	776	2648
	1520	SITBDO5415	967	3299



Made to order options

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
373	520	SITBDO3752	240	819
543	520	SITBDO5452	360	1228
985	520	SITBDO9852	646	2204
	1220	SITBDO9812	1383	4719
	1520	SITBDO9815	1716	5855



SAVE MONEY! WHEN YOU BUY OUR CYLINDER KIT WITH ANY TOWEL RAIL ORDER* QUOTE **PROMOV3** AT TIME OF ORDER

Available in White or Chrome

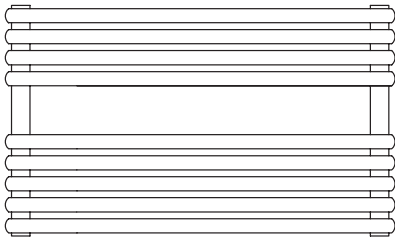


Pipe centres left to right	Pipe centres from wall	Depth from wall
width - 50mm	55mm	90mm

*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOV3W (white), PROMOV3C (chrome).

BDO SITAR

Fitting Instructions

Accessories not included















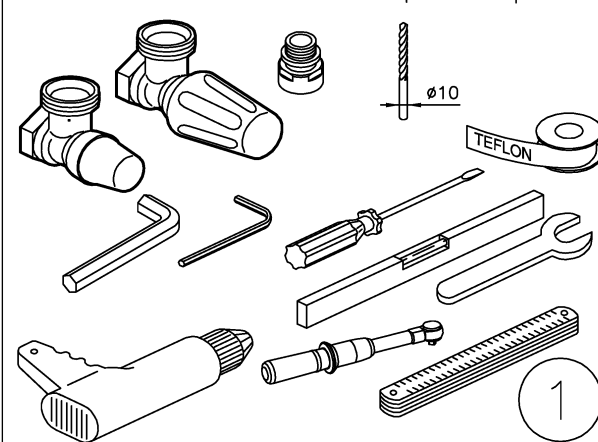


4x




Accessories included

Dowels and screws to be used only on compact walls or hollow bricks.





8x

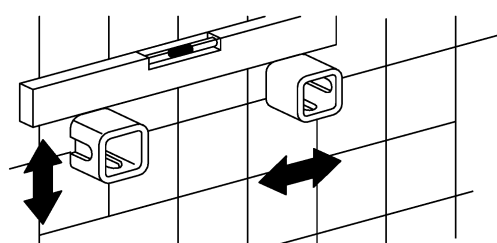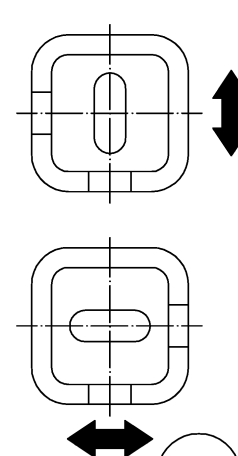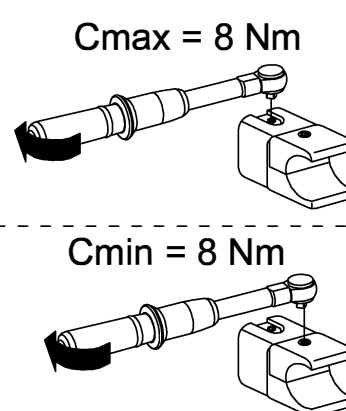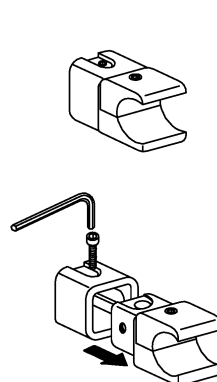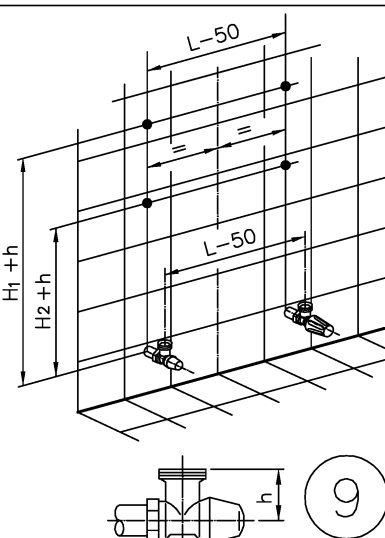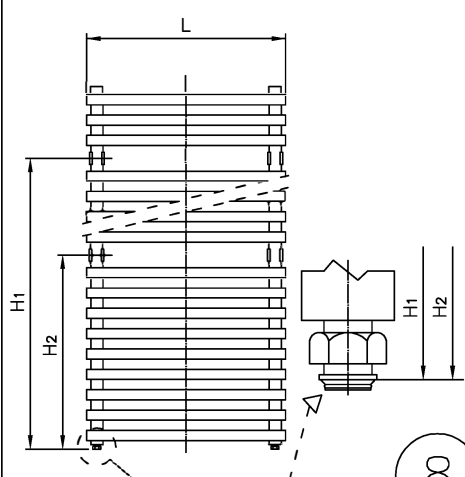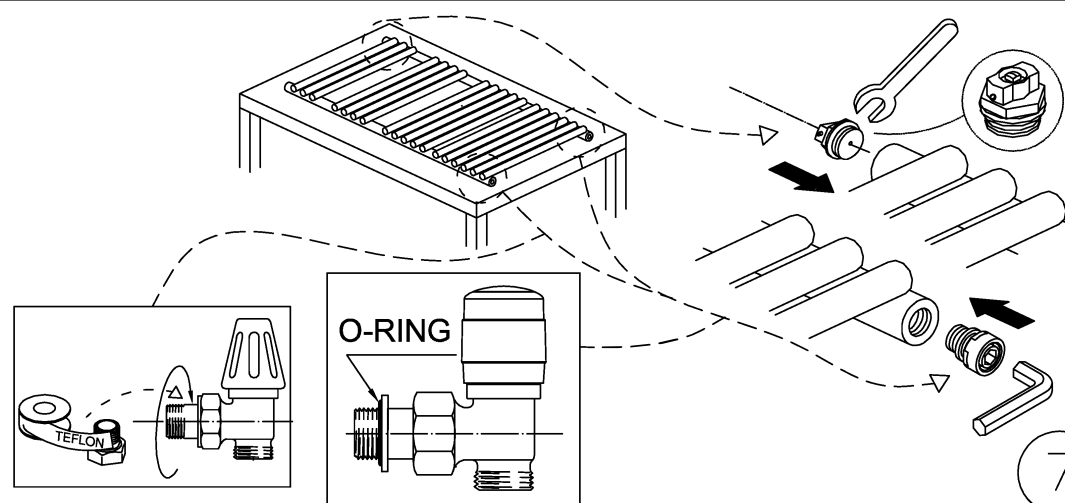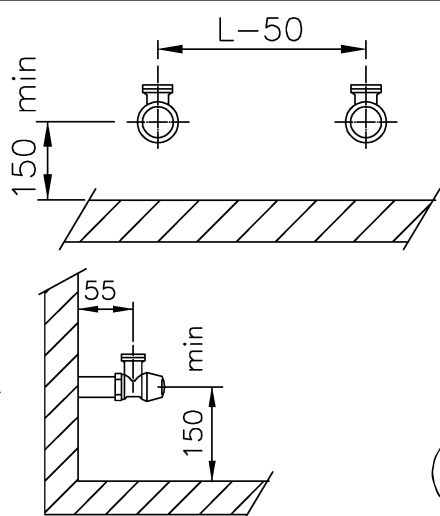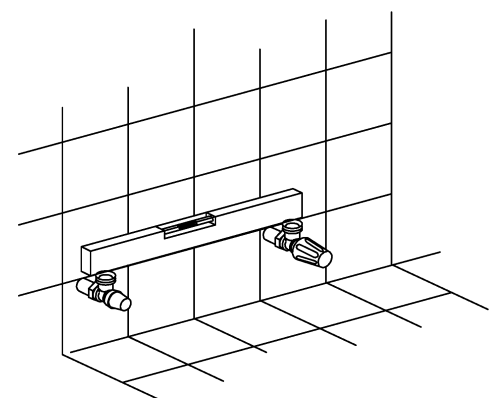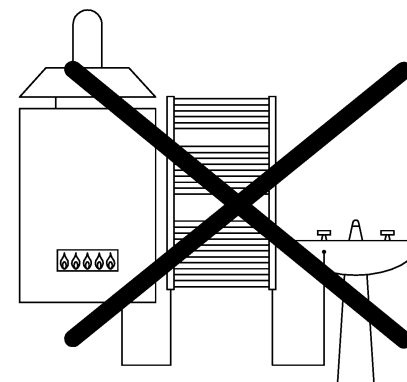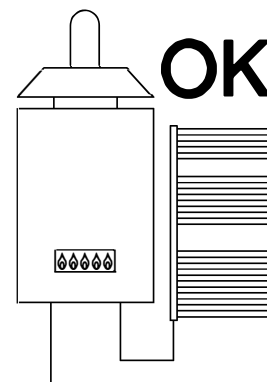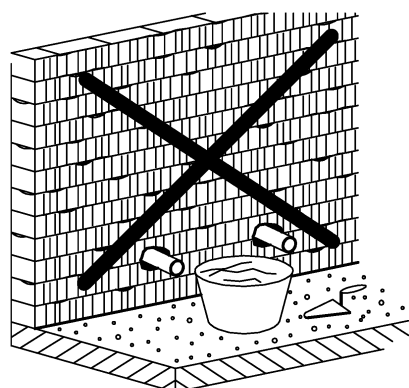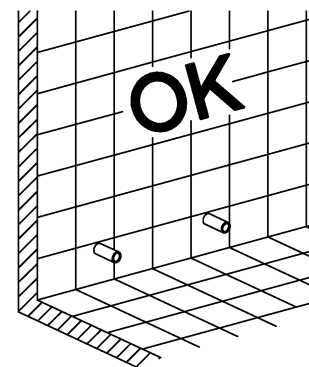

Cmin = 8 Nm

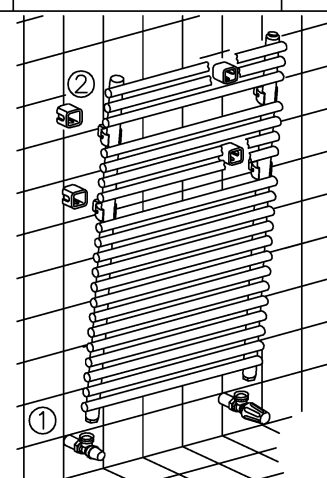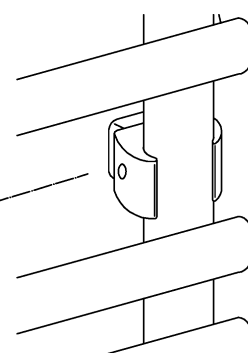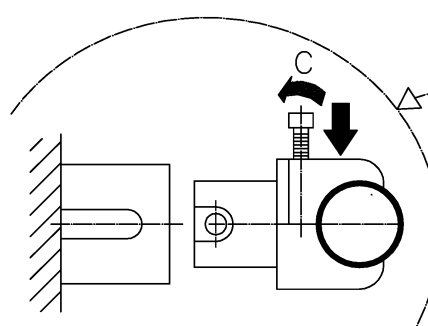

Cmax = 8 Nm

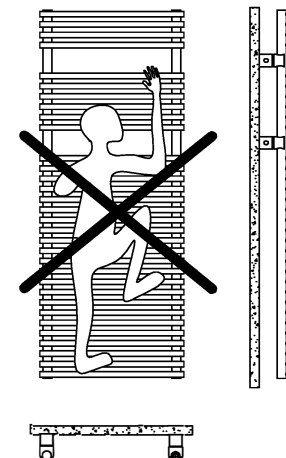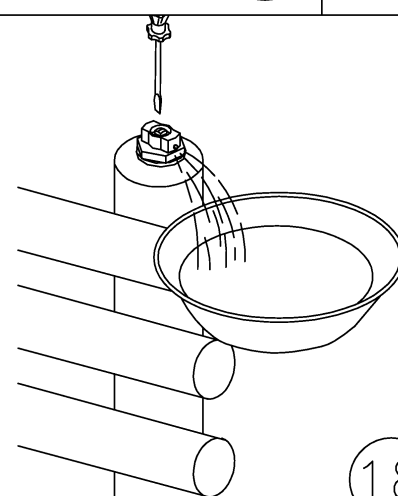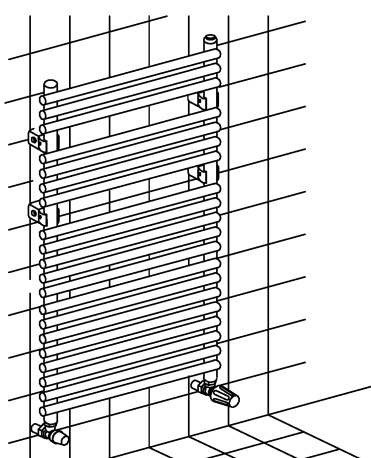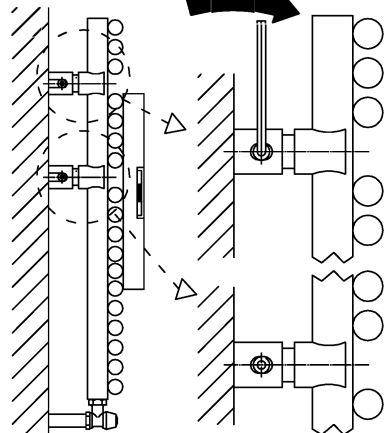

COMMISSION

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer’s guarantee.

TECHNICAL SPECIFICATIONS

Materials	Mild Steel.
Connections	½ flow and return.
Test pressure	11 Bar
Testing authority	EN 442
Maximum operating pressure	8 Bar
Maximum working temperature	95°C
Packaging	Wrapped in polyethylene with cardboard box.
PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system.	

TERMS & CONDITIONS

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage.

The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

GUARANTEES & LIABILITIES

This product is guaranteed for 10 years . The guarantee is subject to the product being installed in accordance with British and or European standards as well as these fitting instructions. The guarantee in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU

A brand of **IRSAP SPA**, Italy’s leading manufacturer of design led radiators.

If you have any questions please contact us on 01342 302250
www.theradiatorcompany.co.uk