


COMBE COM10, COM15, COM18 - L

ALL MEASUREMENTS ARE IN MILLIMETRES


MANUFACTURED FROM STAINLESS STEEL




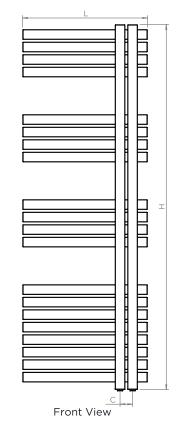





Plumbing Position:

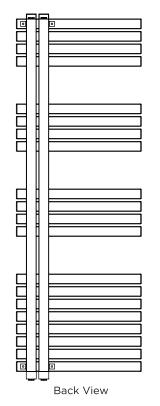







Vertical mount All Dimensions are in mm Max.Working Pressure: 10 Bar Max.Working Temperature: 95° C Inlet / Outlet : 1/2" BSP

Fuel: E/H/D Manufacturing Tolerance: - 5 mm

	Height	Height Length		Pipe Centres	Bracket Centres	
PRODUCT CODE	Н	L	D	С	F	S
	mm	mm	mm	mm	mm	mm
COM10-L	920	500	80	50	830	115
COM15-L	1460	500	80	50	1370	115
COM18-L	1710	500	80	50	880-740	115





Technical specifications are subject to change without prior notice.


COMBE COM10, COM15, COM18 - L

ALL MEASUREMENTS ARE IN MILLIMETRES


MANUFACTURED FROM STAINLESS STEEL




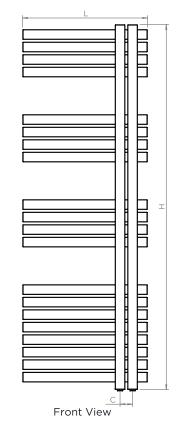





Plumbing Position:

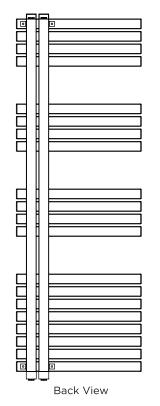







Vertical mount All Dimensions are in mm Max.Working Pressure: 10 Bar Max.Working Temperature: 95° C Inlet / Outlet : 1/2" BSP

Fuel: E/H/D Manufacturing Tolerance: - 5 mm

	Height	Height Length		Pipe Centres	Bracket Centres	
PRODUCT CODE	Н	L	D	С	F	S
	mm	mm	mm	mm	mm	mm
COM10-L	920	500	80	50	830	115
COM15-L	1460	500	80	50	1370	115
COM18-L	1710	500	80	50	880-740	115





Technical specifications are subject to change without prior notice.


COMBE COM10, COM15, COM18 - L

ALL MEASUREMENTS ARE IN MILLIMETRES


MANUFACTURED FROM STAINLESS STEEL




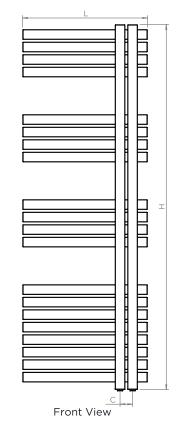





Plumbing Position:

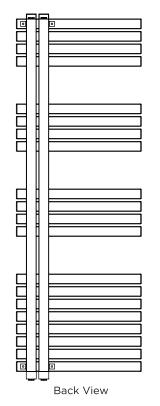







Vertical mount All Dimensions are in mm Max.Working Pressure: 10 Bar Max.Working Temperature: 95° C Inlet / Outlet : 1/2" BSP

Fuel: E/H/D Manufacturing Tolerance: - 5 mm

	Height	Height Length		Pipe Centres	Bracket Centres	
PRODUCT CODE	Н	L	D	С	F	S
	mm	mm	mm	mm	mm	mm
COM10-L	920	500	80	50	830	115
COM15-L	1460	500	80	50	1370	115
COM18-L	1710	500	80	50	880-740	115





Technical specifications are subject to change without prior notice.


COMBE COM10 - R


ALL MEASUREMENTS ARE IN MILLIMETRES


MANUFACTURED FROM STAINLESS STEEL







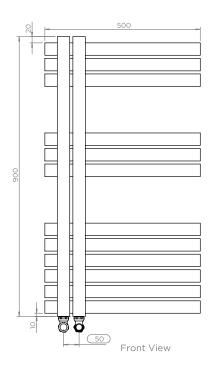


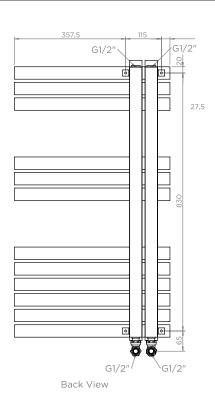









All Dimension are in mm Max.Working Pressure = 10 Bar Max.Working Temprature=95° C Inlet / Outlet : 1/2" BSP





Technical specifications are subject to change without prior notice.


COMBE COM15 - R


ALL MEASUREMENTS ARE IN MILLIMETRES


MANUFACTURED FROM STAINLESS STEEL






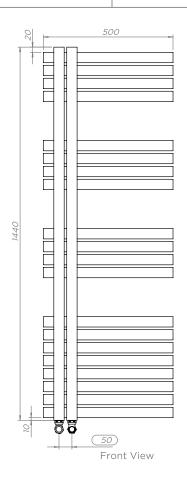






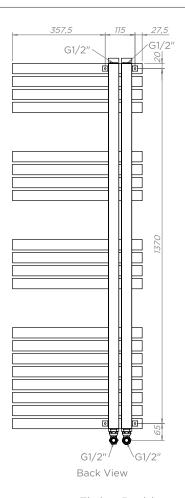

Fitting Position:



All Dimension are in mm Max.Working Pressure = 10 Bar Max.Working Temprature=95° C Inlet / Outlet : 1/2" BSP







Technical specifications are subject to change without prior notice.


COMBE COM18 - R


ALL MEASUREMENTS ARE IN MILLIMETRES

MANUFACTURED FROM STAINLESS STEEL



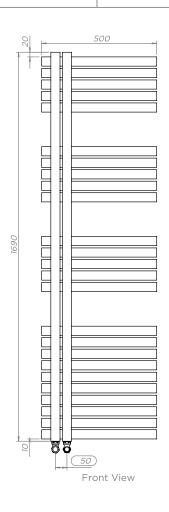

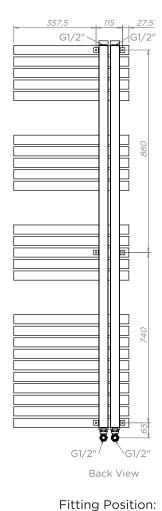







All Dimension are in mm Max.Working Pressure = 10 Bar Max.Working Temprature=95° C Inlet / Outlet : 1/2" BSP

Inlet Outlet







Technical specifications are subject to change without prior notice.