






Art.	Heating capacity 55/45/20°C (W)	Heating capacity 75/65/20°C (W)	Total weight, inc. components and packaging (kg)	Internal volume (dm³)	Recommended capacity of electric heating element (W)
**051	195	400	7,00	2,48	300
**052	232	476	8,40	3,00	300



Piping connection points:

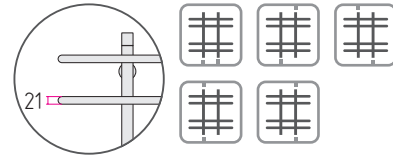

Attention!
An electric element must be mounted at the bottom of the collector marked with a red dot.
An electric element can be mounted on right and left side. For this purpose it is advised to reverse the radiator in a way that a collector with a red dot is on the demanded side.
Use the radiator only in vertical position - with an electric element at the bottom.

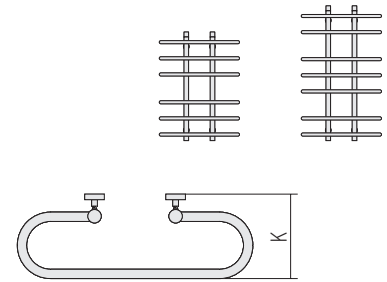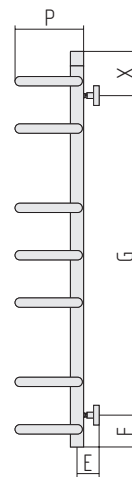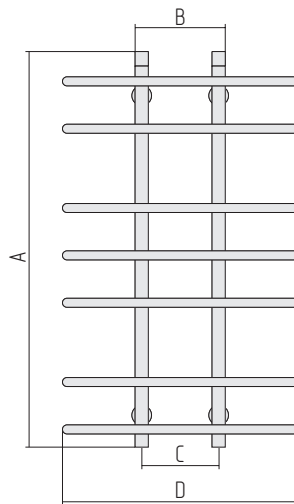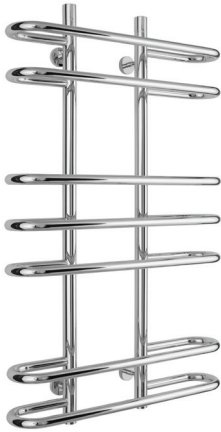

Art.	A	B	C	D	E	F	G	X	P	K
**051	758	232	200	575	54-76	80	562	116	120	163-177
**052	958	232	200	575	54-76	80	762	116	120	163-177

Colour range



50XXX
Polished Stainless Steel



53XXX
Gold