



LOLA[®] VERTICAL

SATIN STAINLESS STEEL

3D
TRADEMARK

15 YEARS
WARRANTY

MATERIAL:

Horizontal collectors in satin stainless steel with $\varnothing$ of 38 mm.
Curved heating elements in satin stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



Pression maximale de service: 8 bar

Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/8" gaz

AWARD

GOLD VILLA
AWARD

ACCESSORIES



Elegant manual square satin valve

Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990320209

Multilayer connection $\varnothing$ 16
Art. Nr. 5991990320208



Elegant square satin valve kit pipe centres 50 mm with thermostatic head - right


Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990320201

Multilayer connection $\varnothing$ 16
Art. Nr. 5991990320200




Kit 2 hooks satin stainless steel


Art. Nr. 5991990010224



Measures for Elegant square manual valve





Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm




Sleeving kit for satin valves

Art. Nr. 5103000000045

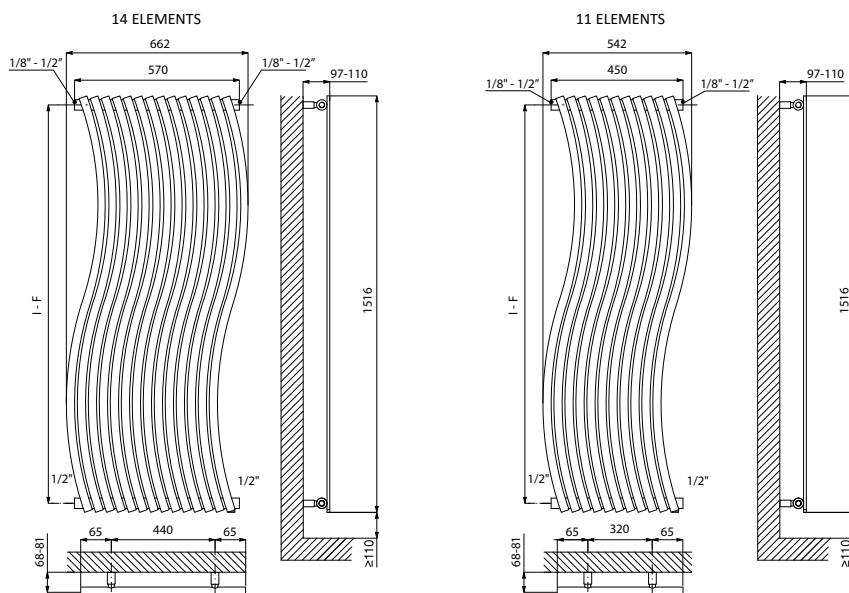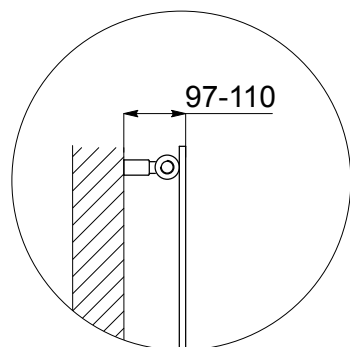

Standard Connexions

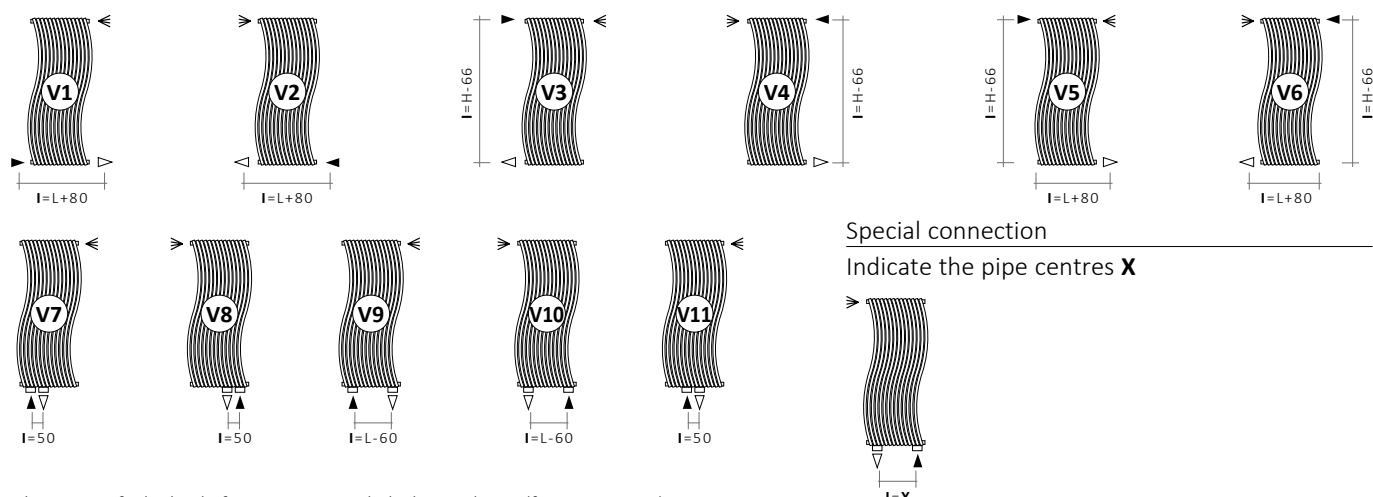

Special connection

Indicate the pipe centres **X**

Always specify the kind of connection needed when ordering (from V1 to V11).

Legend = ► In ▷ Out ◀ Airvent **H** Height **I** Pipe Centres **L** Width □ Connection

LOLA® VERTICAL - SATIN STAINLESS STEEL

Art. Nr.	Variant	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
		H [mm]	L [mm]	I [mm]	[Kg]	[m ²]	[lt]	Δt = 50°C	Δt = 30°C	
3551740130001	V1	1516	450	530	15,5	1,45	4,1	557	289	1,2811
3551740130002			570	650	19,0	1,84	5,1	708	365	1,2959
3551740000016	V2	1516	450	530	15,5	1,45	4,1	557	289	1,2811
3551740000062			570	650	19,0	1,84	5,1	708	365	1,2959
3551740000069	V3	1516	450	1450	15,5	1,45	4,1	557	289	1,2811
3551740000047			570	1450	19,0	1,84	5,1	708	365	1,2959
3551740000019	V4	1516	450	1450	15,5	1,45	4,1	557	289	1,2811
3551740000023			570	1450	19,0	1,84	5,1	708	365	1,2959
3551740000077	V5	1516	450	1450	15,5	1,45	4,1	557	289	1,2811
3551740000103			570	1450	19,0	1,84	5,1	708	365	1,2959
3551740000104	V6	1516	450	1450	15,5	1,45	4,1	557	289	1,2811
3551740000105			570	1450	19,0	1,84	5,1	708	365	1,2959
3551740000054	V7	1516	450	50	15,5	1,45	4,1	557	289	1,2811
3551740000030			570	50	19,0	1,84	5,1	708	365	1,2959
3551740000039	V8	1516	450	50	15,5	1,45	4,1	557	289	1,2811
3551740000011			570	50	19,0	1,84	5,1	708	365	1,2959
3551740000040	V9	1516	450	390	15,5	1,45	4,1	557	289	1,2811
3551740000012			570	510	19,0	1,84	5,1	708	365	1,2959
3551740000037	V10	1516	450	390	15,5	1,45	4,1	557	289	1,2811
3551740000022			570	510	19,0	1,84	5,1	708	365	1,2959
3551740000008	V11	1516	450	50	15,5	1,45	4,1	557	289	1,2811
3551740000038			570	50	19,0	1,84	5,1	708	365	1,2959

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)ⁿ



LOLA® VERTICAL

POLISHED STAINLESS STEEL | DECOR

3D
TRADEMARK

15 YEARS
WARRANTY

MATERIAL:

Horizontal collectors in polished stainless steel with $\varnothing$ of 38 mm.
Curved heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.
The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a recyclable film in polyethylene and with a carton box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



Pression maximale de service: 8 bar

Température maximale de service: 110° C


Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/8" gaz

AWARD

GOLD VILLA
AWARD

LOLA® DECOR

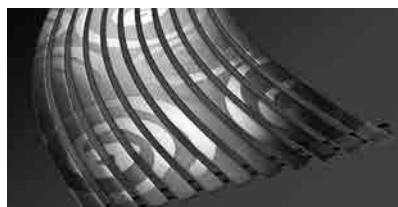

artwork **Mariano Moroni**



ACCESSORIES



Elegant square manual polished valve kit

Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990301084

Multilayer connection $\varnothing$ 16
Art. Nr. 5991990301083



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right


Copper connection $\varnothing$ 12/14/15
Art. Nr. 5991990301076

Multilayer connection $\varnothing$ 16
Art. Nr. 5991990301075




Kit 2 hooks polished stainless steel


Art. Nr. 5991990010223



Measures for Elegant square manual valve






Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm




Sleeving kit for polished valves

Art. Nr. 5103000000044

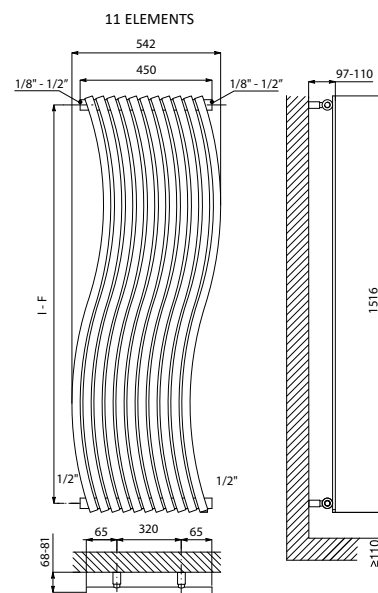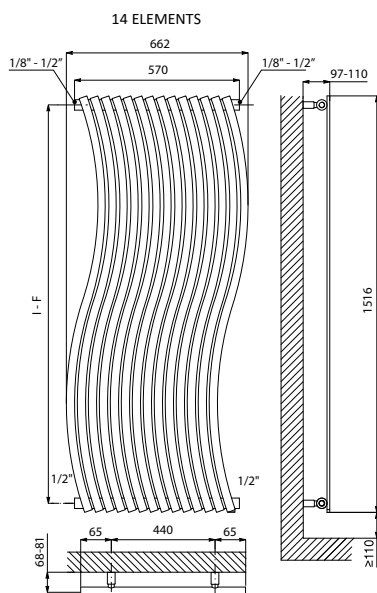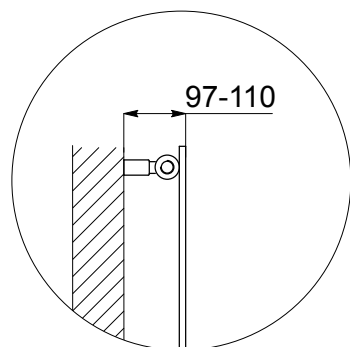

Standard Connexions

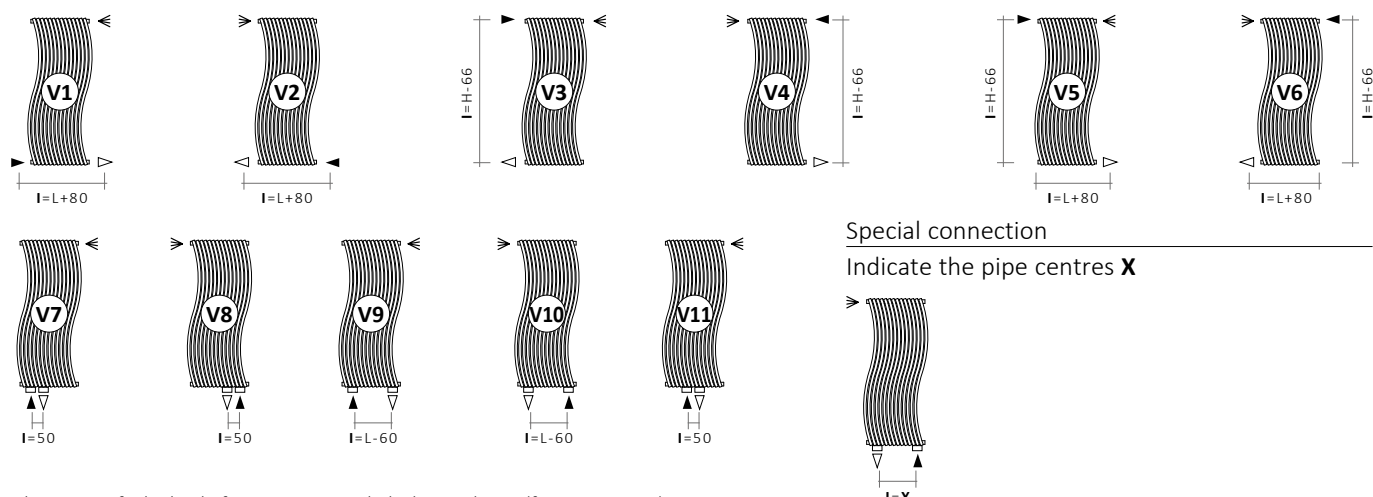

Always specify the kind of connection needed when ordering (from V1 to V11).

Legend = ► In ▷ Out ◄ Airvent H Height I Pipe Centres L Width □ Connection

LOLA® VERTICAL

				POLISHED		DECOR						
Variant	Height	Width	Pipe Centres	Art. Nr.	Art. Nr.	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n	
	H [mm]	L [mm]	I [mm]			[Kg]	[m²]	[lt]	Δt = 50°C	Δt = 30°C		
V1	1516	450	530	3551740130011	3551740130101	15,5	1,45	4,1	507	264	1,2746	
		570	650	3551740130012	3551740130102	19,0	1,84	5,1	645	334	1,2878	
V2	1516	450	530	3551740000035	3551740000075	15,5	1,45	4,1	507	264	1,2746	
		570	650	3551740000009	3551740000034	19,0	1,84	5,1	645	334	1,2878	
V3	1516	450	1450	3551740000052	3551740000003	15,5	1,45	4,1	507	264	1,2746	
		570	1450	3551740000049	3551740000031	19,0	1,84	5,1	645	334	1,2878	
V4	1516	450	1450	3551740000018	3551740000043	15,5	1,45	4,1	507	264	1,2746	
		570	1450	3551740000044	3551740000032	19,0	1,84	5,1	645	334	1,2878	
V5	1516	450	1450	3551740000100	3551740000079	15,5	1,45	4,1	507	264	1,2746	
		570	1450	3551740000056	3551740000081	19,0	1,84	5,1	645	334	1,2878	
V6	1516	450	1450	3551740000101	3551740000110	15,5	1,45	4,1	507	264	1,2746	
		570	1450	3551740000109	3551740000111	19,0	1,84	5,1	645	334	1,2878	
V7	1516	450	50	3551740000024	3551740000076	15,5	1,45	4,1	507	264	1,2746	
		570	50	3551740000097	3551740000071	19,0	1,84	5,1	645	334	1,2878	
V8	1516	450	50	3551740000029	3551740000045	15,5	1,45	4,1	507	264	1,2746	
		570	50	3551740000021	3551740000084	19,0	1,84	5,1	645	334	1,2878	
V9	1516	450	390	3551740000020	3551740000046	15,5	1,45	4,1	507	264	1,2746	
		570	510	3551740000033	3551740000028	19,0	1,84	5,1	645	334	1,2878	
V10	1516	450	390	3551740000015	3551740000065	15,5	1,45	4,1	507	264	1,2746	
		570	510	3551740000010	3551740000060	19,0	1,84	5,1	645	334	1,2878	
V11	1516	450	50	3551740000025	3551740000026	15,5	1,45	4,1	507	264	1,2746	
		570	50	3551740000041	3551740000086	19,0	1,84	5,1	645	334	1,2878	

For output at different Δt than 50°C, please refer to the following formula: desired output = output at Δt 50°C x (desired Δt/50)ⁿ