


# CHAUCER Vertical

- Italian design & manufacture
- 23mm Round Tubes available in 1 height & 4 widths in Single & Double
- Standard White RAL 9016 delivered in 48-72 hours
- 25 RAL colours, 8 special finishes, up to 15 working days (page 11)

STOCK

48-72 hrs


10 YEAR GUARANTEE

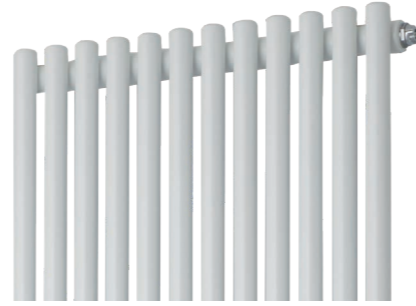

## Sizes and Prices


Dimensions (mm)		Elements	Output Δt 50°C		Product Code
Height	Width		Watts	Btu's	
<b>Vertical - Single</b>					
1820	300	9	706	2409	CHAU183009SV
	402	12	941	3211	CHAU184012SV
	504	15	1176	4013	CHAU185015SV
	606	18	1411	4814	CHAU186018SV
<b>Vertical - Double</b>					
1820	300	18	1056	3603	CHAU183018DV
	402	24	1408	4804	CHAU184024DV ♦
	504	30	1760	6005	CHAU185030DV
	606	36	2111	7203	CHAU186036DV

Actual tube size 23mm




## Pipe Centres and Technical Drawings


Single

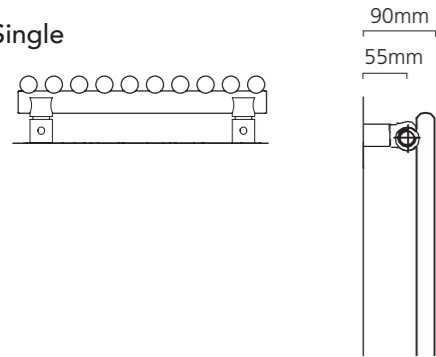

**Single Vertical**  
 Pipe centres left to right = Width plus valves  
 Pipe centres from wall = 55mm  
 Depth from wall = 90mm

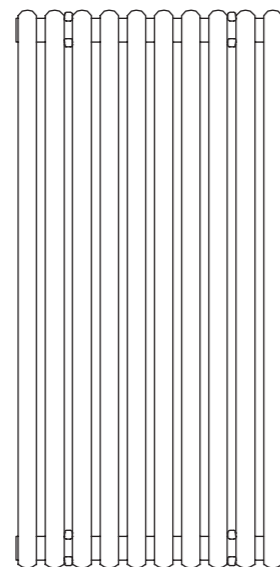

Double

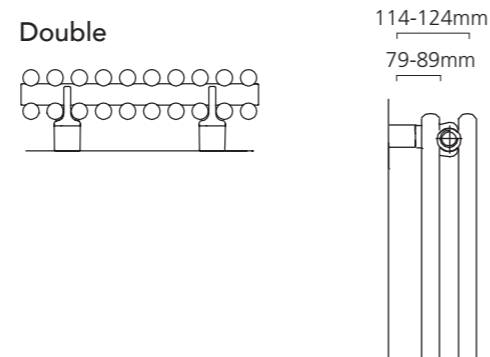

**Double Vertical**  
 Pipe centres left to right = Width plus valves  
 Pipe centres from wall = 79mm - 89mm  
 Depth from wall = 114mm - 124mm



Horizontal (p.50-51).


+Valves Prices include Angled Chrome or White KINGSTON TRV's



Please specify at time of order



Single Vertical.

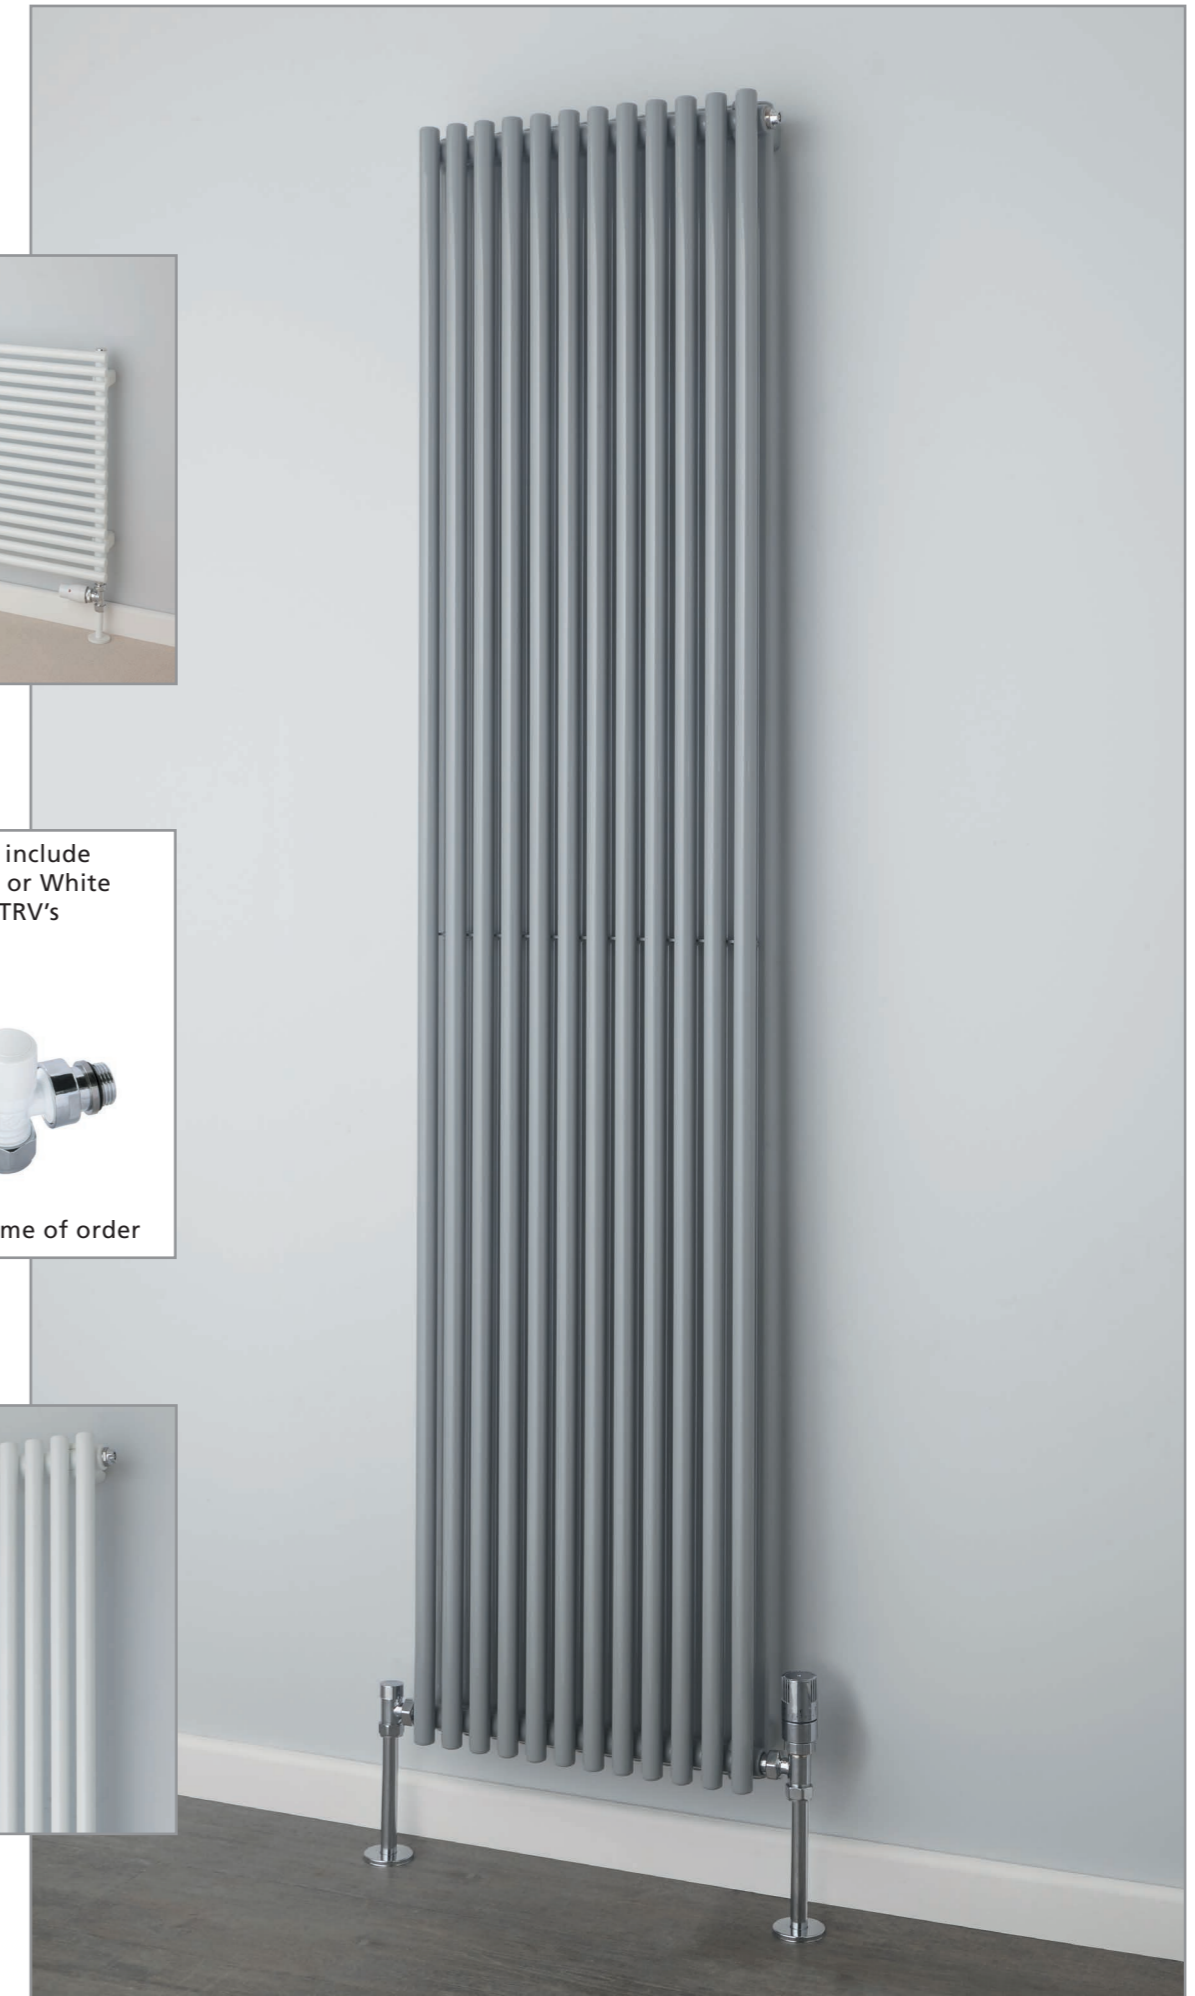

♦ CHAU184024DV Double Vertical RAL 7042, 1820mm x 402mm shown with KINGSTON TRV's.

# CHAUCER Vertical Fitting Instructions


Steel Radiator in White RAL 9016  
23mm Round Tube, 30mm Round Collectors

Please read these instructions and terms and conditions carefully prior to installation. Failure to do so may invalidate the warranty.




## Drawings


**Fig 1**  
Single Chaucer




Double Chaucer




**Fig 2**




**Fig 3**  
Single Chaucer




Double Chaucer



**Fig 4**  
Single Chaucer



Double Chaucer



## Pipe Centres

	Single	Double
Pipe centres left to right	= width plus valves	width plus valves
Pipe centres from wall	= 55mm	79mm - 89mm
Depth from wall	= 90mm	114mm - 124mm

## 1. Unpack & Inspect

This product should have reached you in perfect condition. Please carefully unpack and inspect this radiator and all fittings. Your point of purchase must be notified of any shortages or damage within 28 days of delivery. For further information please see terms and conditions on reverse.

## 2. Contents

### You should have:

- 1 Radiator
- 4 Wall Brackets
- 4 Wall Plugs
- 4 Screws
- 4 Wall Sleeves
- 1 Airvent
- 1 Blanking Plug

### You will need:

- Tape measure
- Electric drill and bits
- Spirit level

## 3. Mark Bracket Positions

1. Mark bracket positions as per **Fig. 3**, measure the width (X) of the radiator less 130mm and the height (Y) of the radiator less 50mm to find your four fixing positions for the Wall sleeves.
2. The Wall Sleeve ("A" in **Fig.1**) screws into the wall in the positions as described above.
3. Ensure diverter is in the correct position
4. Attach clamps B & C to collector between the 2nd and 3rd element from either side, do not overtighten (**Fig.1**) this, to allow slight adjustment for inserting into wall sleeves.
5. Raise radiator & slot into Wall sleeves "A" & tighten (**Fig. 4**)

## 4. Fix Brackets

Using a suitable drill bit, screws and plugs, fix the brackets and level with a spirit level.

### PLEASE NOTE:

It is essential that all brackets are level and square prior to hanging the radiator to ensure a vertical alignment for connecting the pipework.

## 5. Identify Diverter

Factory fitted steel diverters are used in all vertical models and can be identified by a sticker found on the underside of one collector. The radiator must be hung with the diverter at the bottom. If this sticker is missing simply look into both collectors, one will have a clear water way and one will have a deliberate blockage, this deliberate blockage is the diverter. Please note the diverter can not be removed.

## 6. Hang & Commission

With the brackets sleeves firmly fixed and level, the radiator can be hung in position by inserting the brackets into the sleeves and securing with the grub screws provided.

When commissioning your radiator on an indirect/closed system we recommend using a suitable mixed metal inhibitor to protect against scale & corrosion.

**Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer's guarantee.**

---

## Technical Specifications

<b>Materials</b>	Steel.
<b>Connections</b>	½" flow and return.
<b>Test pressure</b>	6 Bar
<b>Maximum operating pressure</b>	4 Bar
<b>Maximum working temperature</b>	95°C
<b>Packaging</b>	Wrapped in polyethylene & boxed.

## Guarantees & Liabilities

This product is guaranteed for 10 years. The guarantees in all cases are subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantees in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to us.

## Terms & Conditions

All products must be inspected once removed from the packaging and your point of purchase notified within 28 days of delivery of any scratches, blemishes or other damage. Your point of purchase will then agree appropriate action.

Imperfect radiators should therefore not be fitted and we will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If we are not notified within 28 days of the date on the signed delivery note then it will be deemed that we have fully complied with our obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims. We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation, we cannot accept responsibility for items damaged after delivery.

For full details of our Terms and Conditions please visit [www.supplies4heat.co.uk](http://www.supplies4heat.co.uk) or call us on 01342 306880.