



SFERE

design **Simone Micheli**

**EUROPEAN
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES FOR STANDARD VERSION:

(ONLY FOR STANDARD VERSION):

Valves with thermostatic head

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16)

Ready - to install pipe connection kit

FOR WALL-FIT VERSION THE VALVES MUST BE PURCHASED SEPARATELY VERSION FOR WALL-FIT VALVES INCLUDES:

2x1/2" connections

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiator and accessories: standard white colour R01.

PRODUCT CERTIFICATES



Pression maximale de service: 5 bar

Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz

AWARD



SFERE with wall-fit valves



Wall-fit valves (OPTIONAL)



ACCESSORIES





Manual wall-fit valves

Fitting for wall-fit valves
Copper connection Ø 12/14/15
Art. Nr. 5991170300001

Fitting for wall-fit valves
Multilayer connection Ø 16
Art. Nr. 5991170300002

Wall-fit valves
Art. Nr. 5991990311226

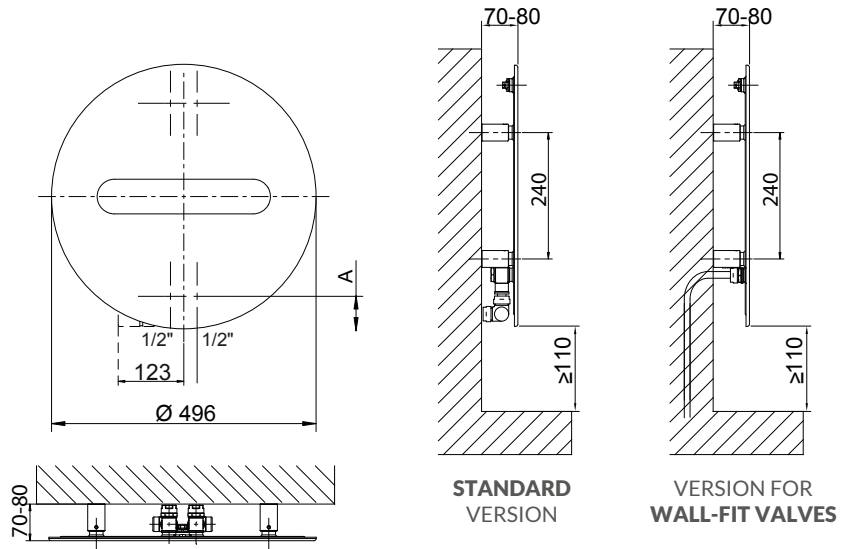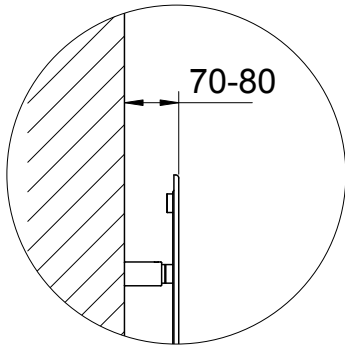

SFERE

	Art. Nr.	Diameter		Pipe Centres	A	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
		D [mm]	I [mm]						$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
STANDARD VERSION	3540806100211	496	50	50	24	0,35	0,3	194	105	1,1950	1,195
VERSION WALL-FIT VALVES	3540806100212	496	50	50	93	0,35	0,3	194	105	1,1950	1,195

Art. Nr. are referred to colour WHITE R01 - version.

standard version is inclusive of valve and holder.

Wall fit version includes only 2 x 1/2" connections.

For output at different Δt than 50°C , please refer to the following formula: desired output = output at $\Delta t 50^{\circ}\text{C}$ x (desired $\Delta t/50$)ⁿ