



ALL MEASUREMENTS ARE IN MILLIMETRES MANUFACTURED FROM MILD STEEL


3K10

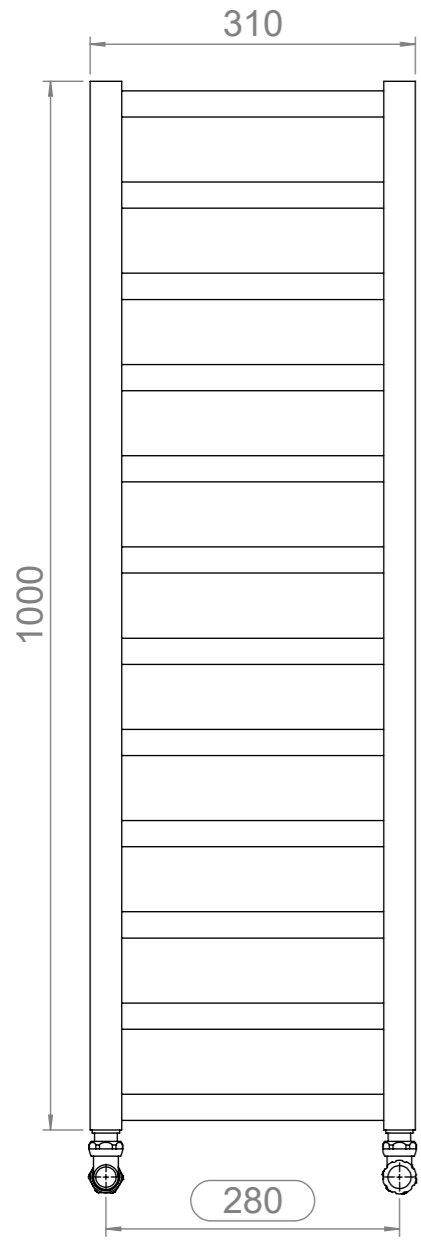



Front View

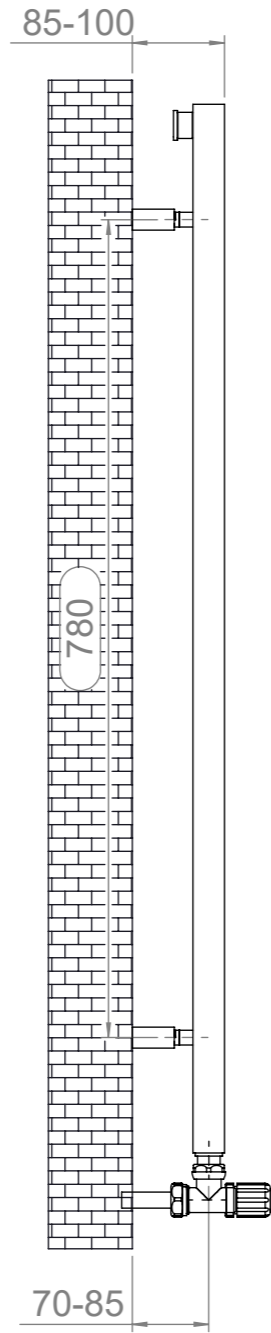

Side View

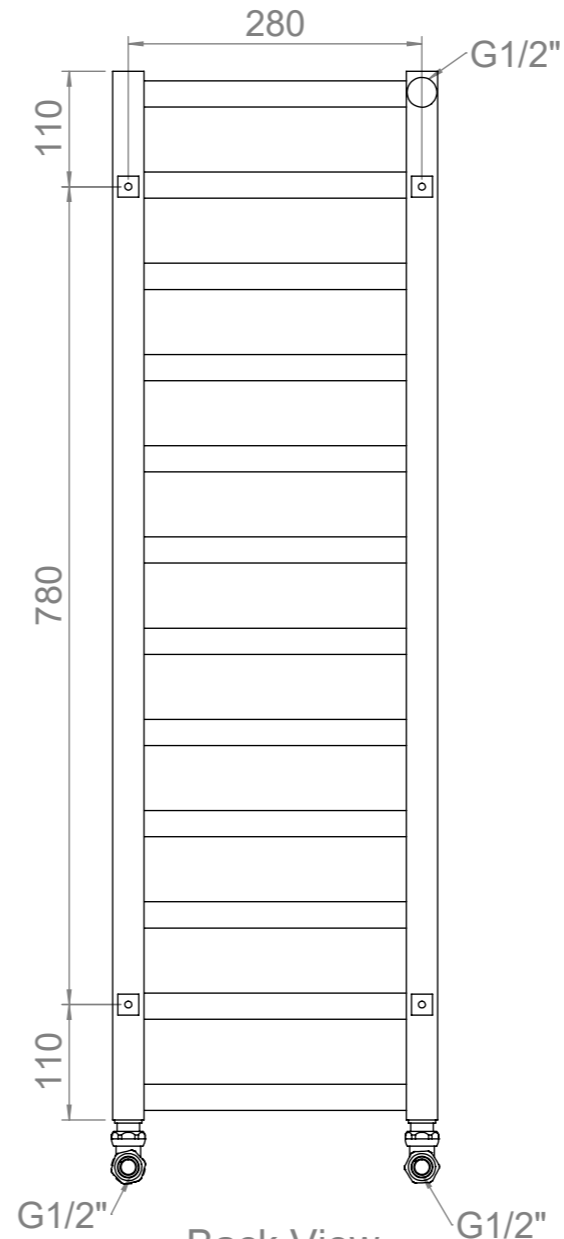



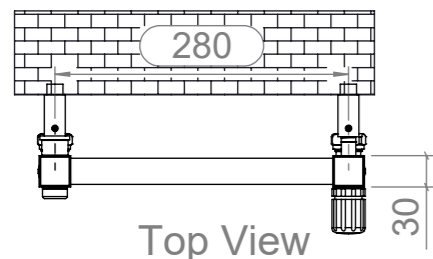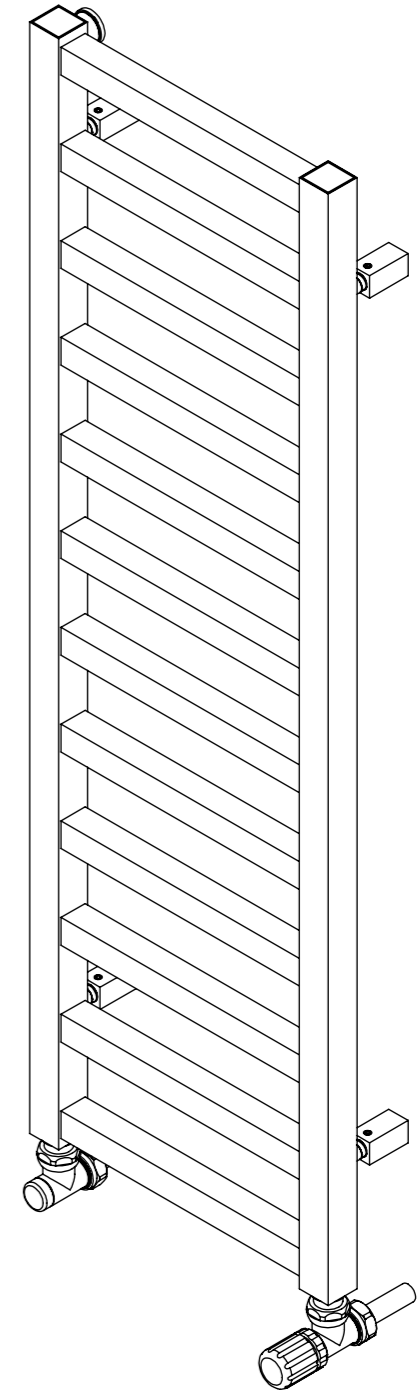




Back View




Top View

Installation Accessories:

- | | |
|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
|  x4 |  x4 |
|  x4 |  x4 |
|  x4 |  x1 |




Fitting Position:

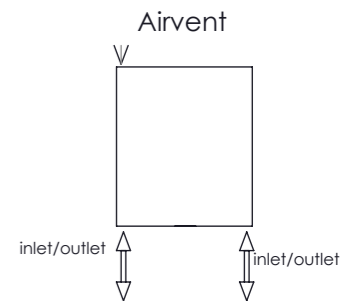


All Dimensions are in mm
 Max. Working Pressure: 10 Bar
 Max. Working Temperature: 95° C
 Inlet / Outlet : 1/2" BSP
 Fuel Type: H

ALL MEASUREMENTS ARE IN MILLIMETRES MANUFACTURED FROM MILD STEEL


3K14

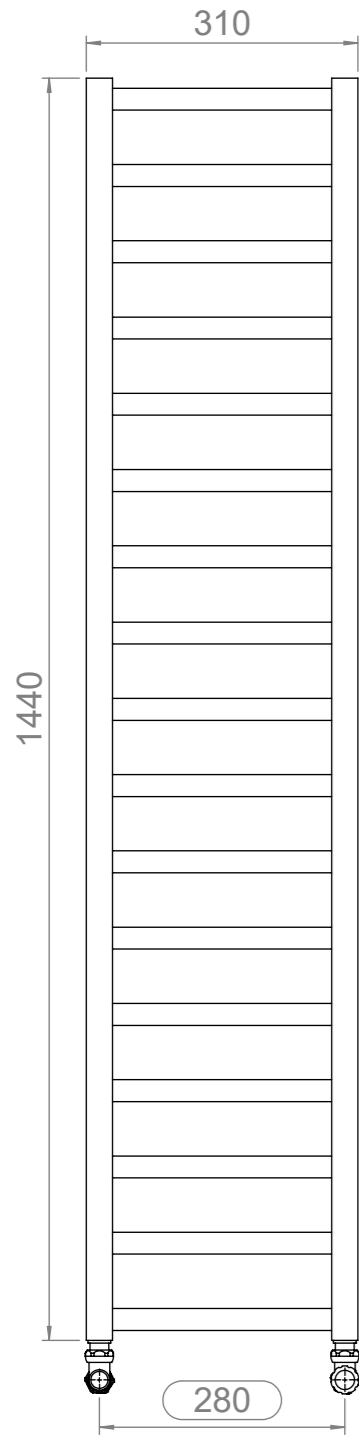



Front View

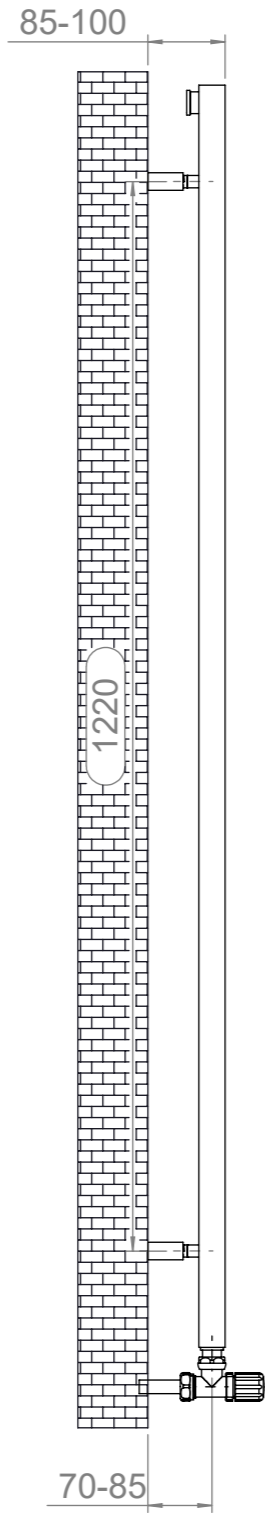

Side View


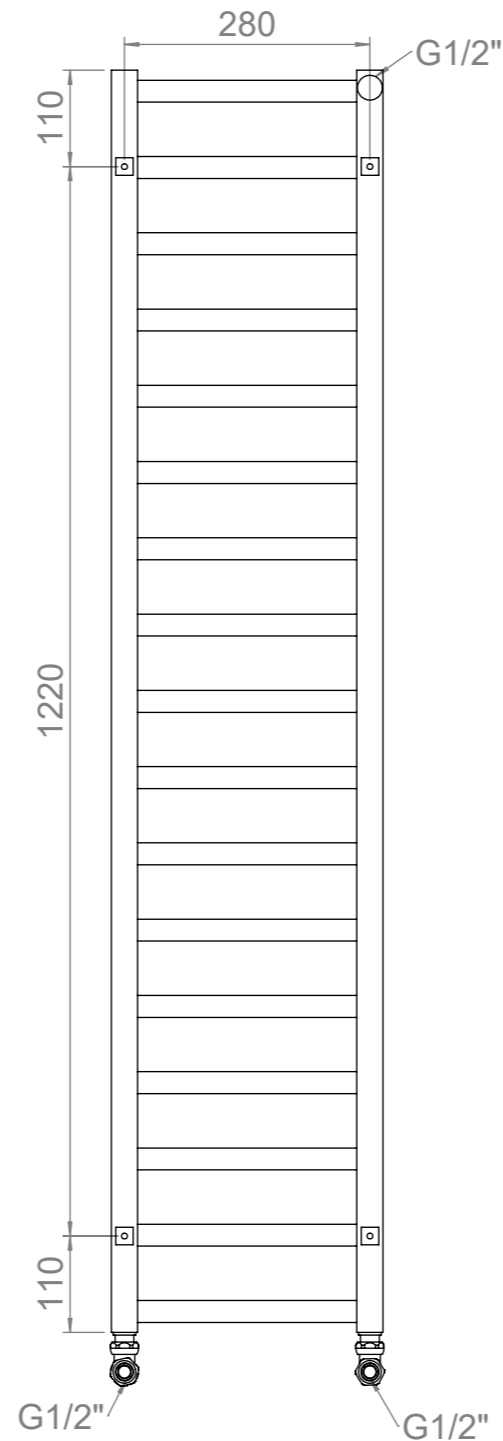






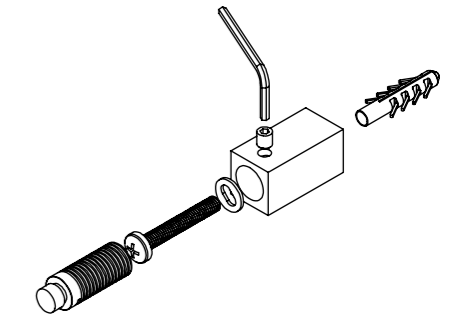
Back View

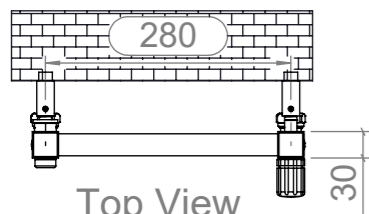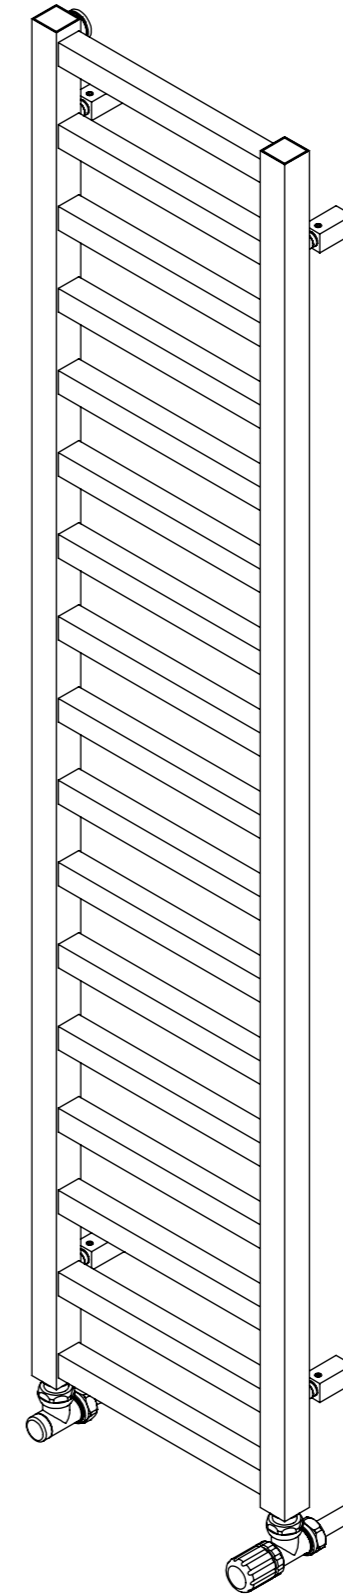


Top View

Installation Accessories:

-  x4  x4
-  x4  x4
-  x4  x1








Fitting Position:

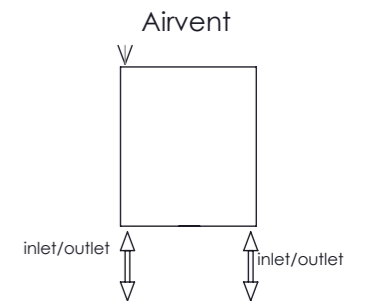





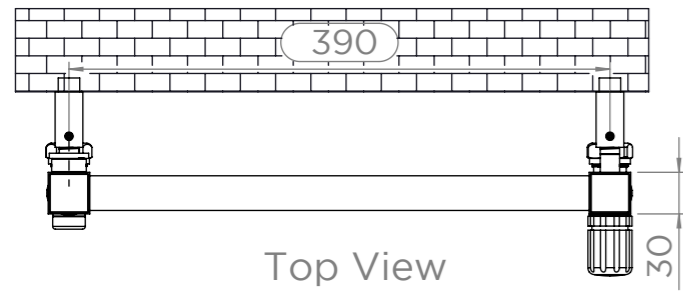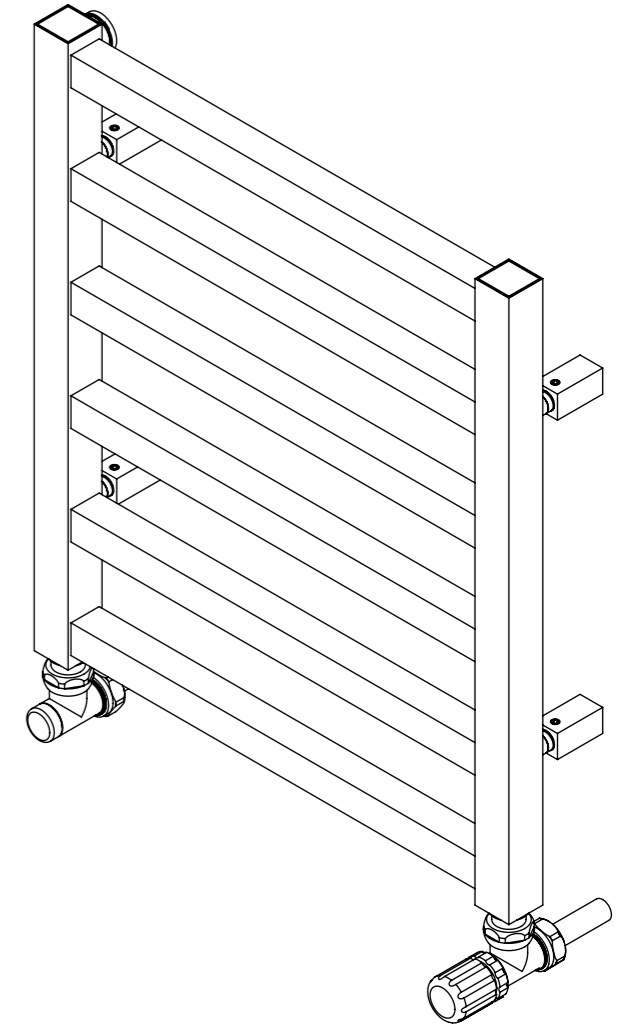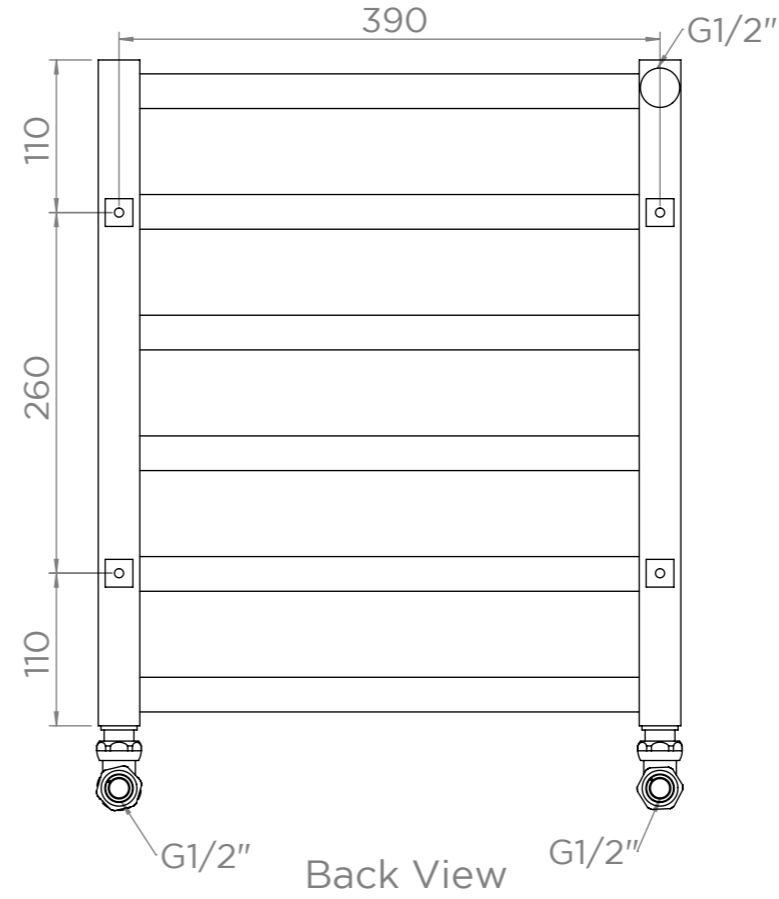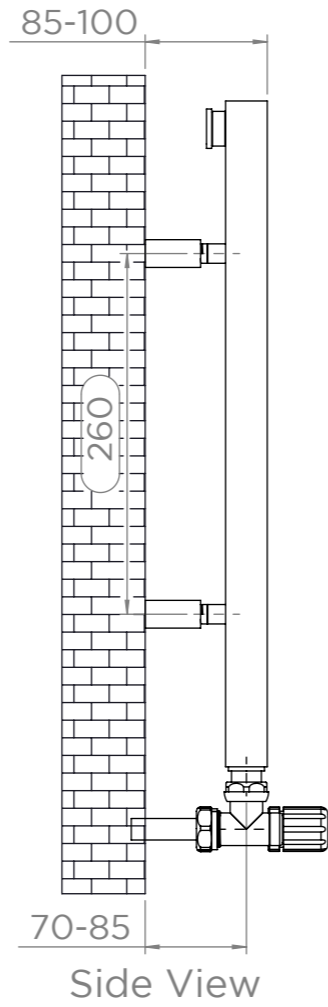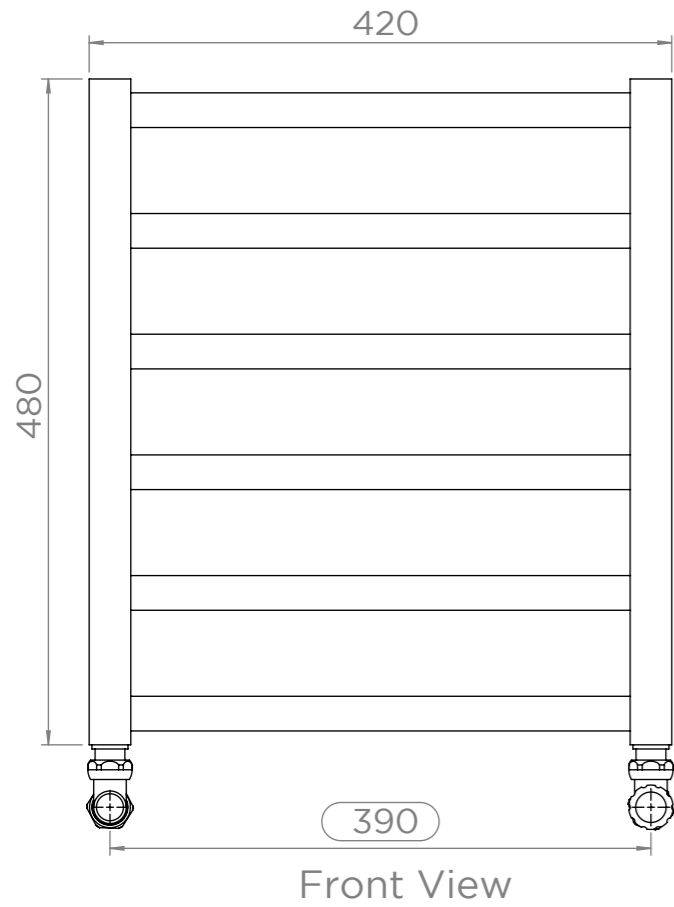

All Dimensions are in mm
 Max. Working Pressure: 10 Bar
 Max. Working Temperature: 95° C
 Inlet / Outlet : 1/2" BSP
 Fuel Type: H


ALL MEASUREMENTS ARE IN MILLIMETRES | MANUFACTURED FROM MILD STEEL

4K5




Installation Accessories:

- | | |
|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
|  x4 |  x4 |
|  x4 |  x4 |
|  x4 |  x1 |

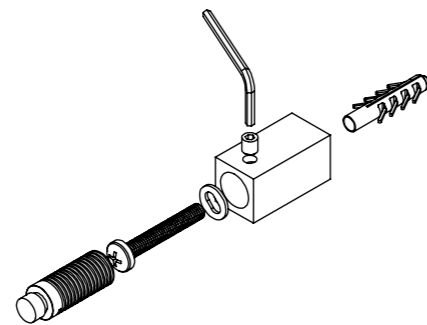


Fitting Position:

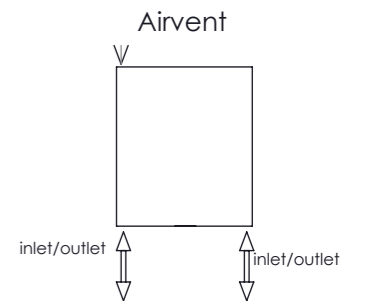


All Dimensions are in mm
 Max. Working Pressure: 10 Bar
 Max. Working Temperature: 95° C
 Inlet / Outlet : 1/2" BSP
 Fuel Type: H

ALL MEASUREMENTS ARE IN MILLIMETRES | MANUFACTURED FROM MILD STEEL


5K10

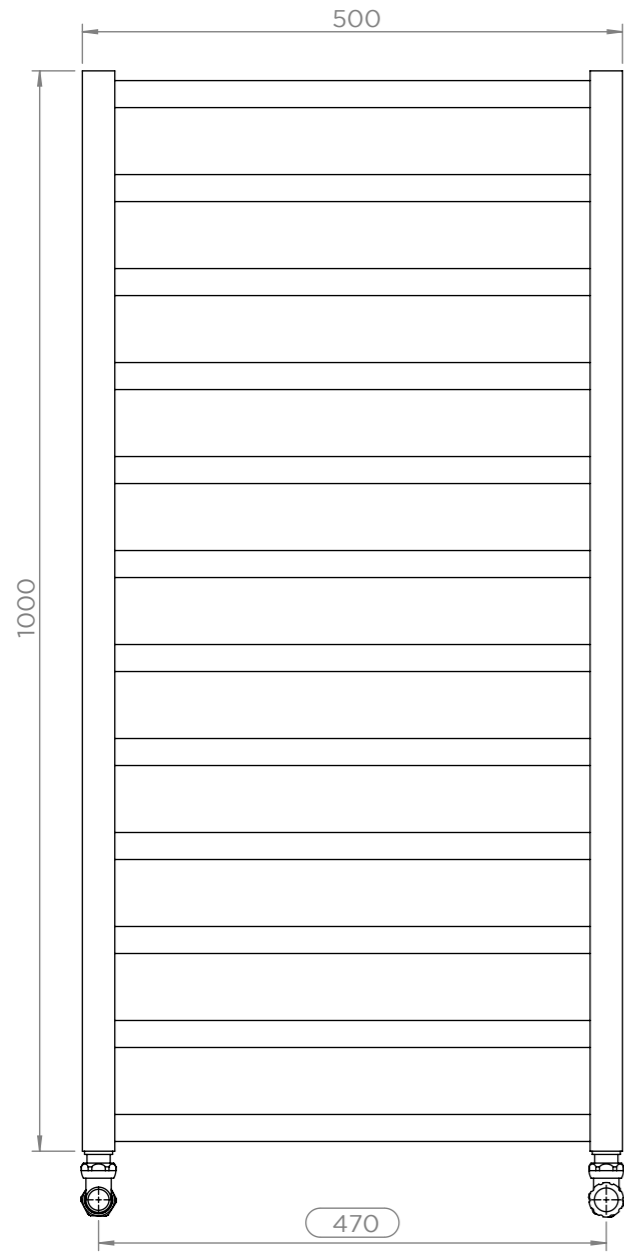


Front View

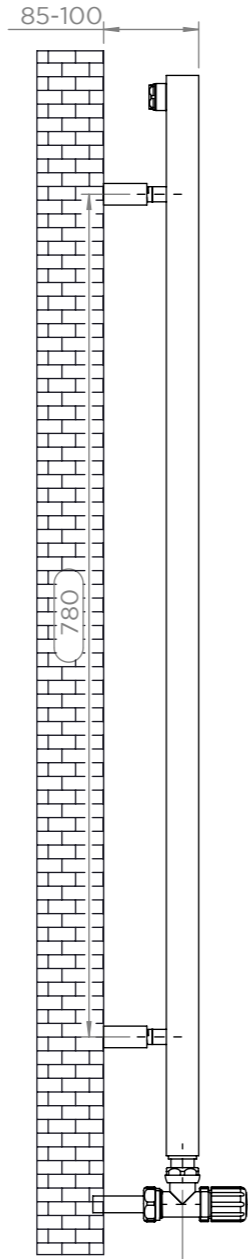



Side View

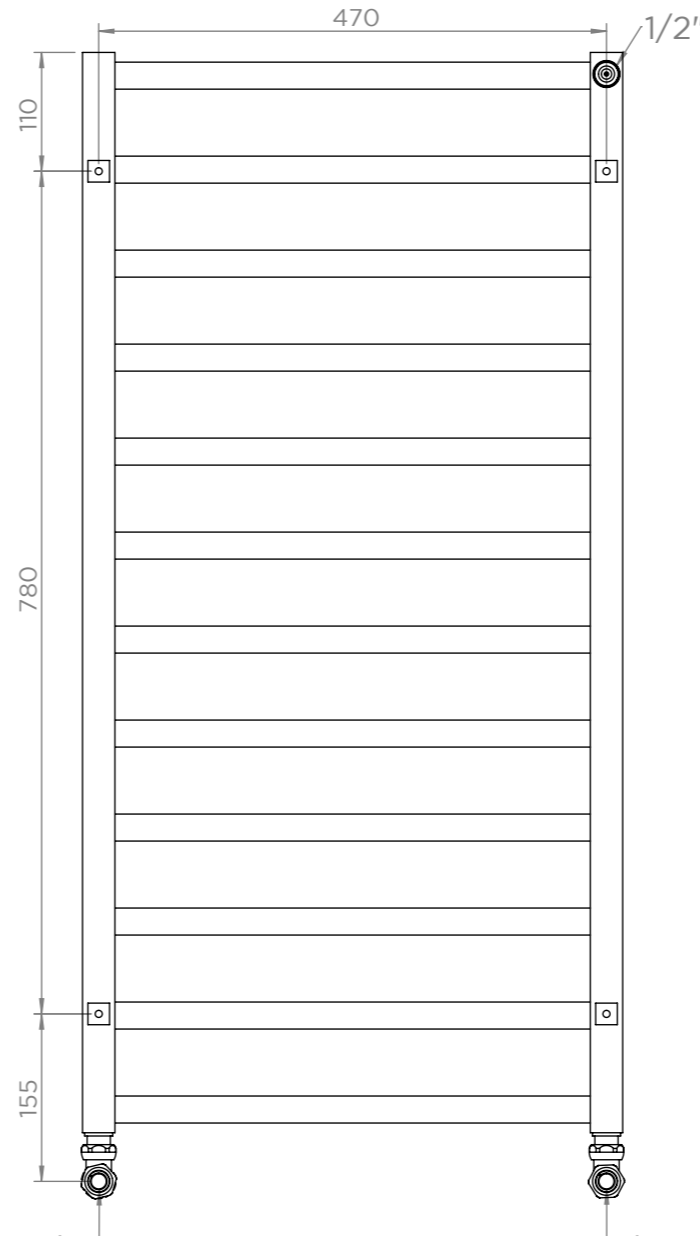

Back View

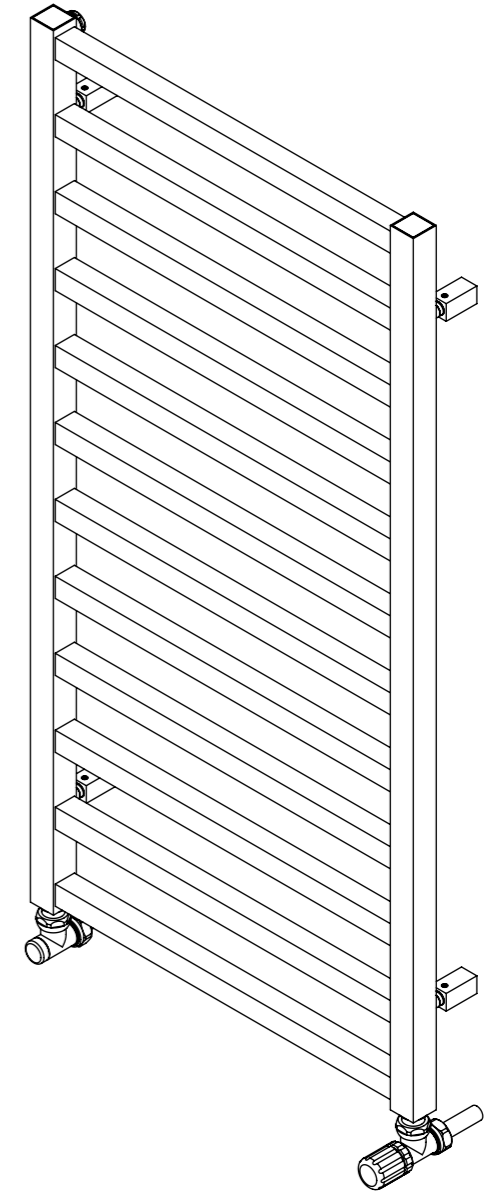




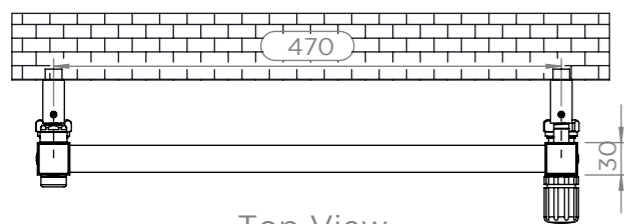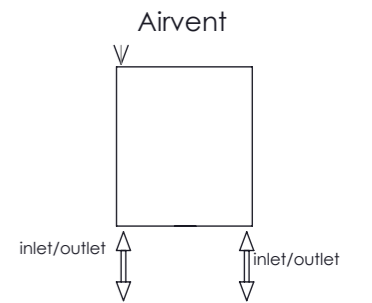


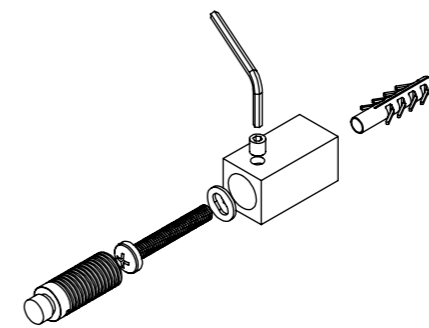
Fitting Position:



Top View

Installation Accessories:






-  x4
-  x4
-  x4
-  x4
-  x4
-  x1









All Dimensions are in mm
 Max. Working Pressure: 10 Bar
 Max. Working Temperature: 95° C
 Inlet / Outlet : 1/2" BSP
 Fuel Type: H

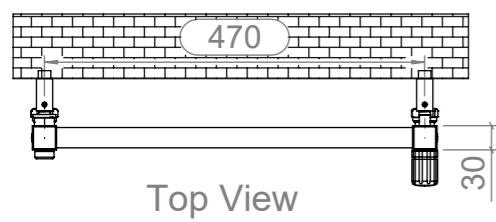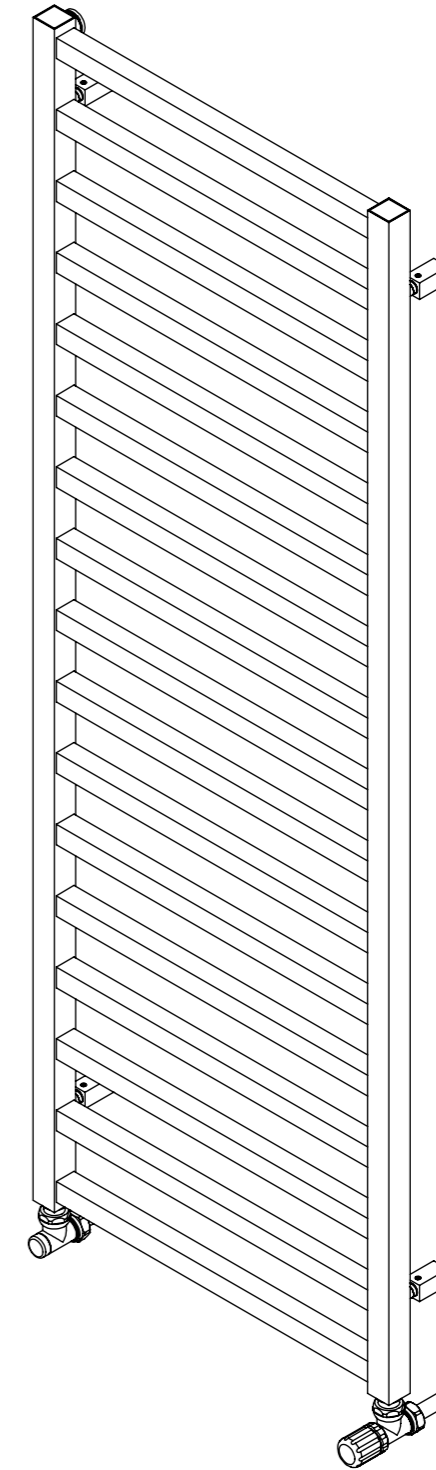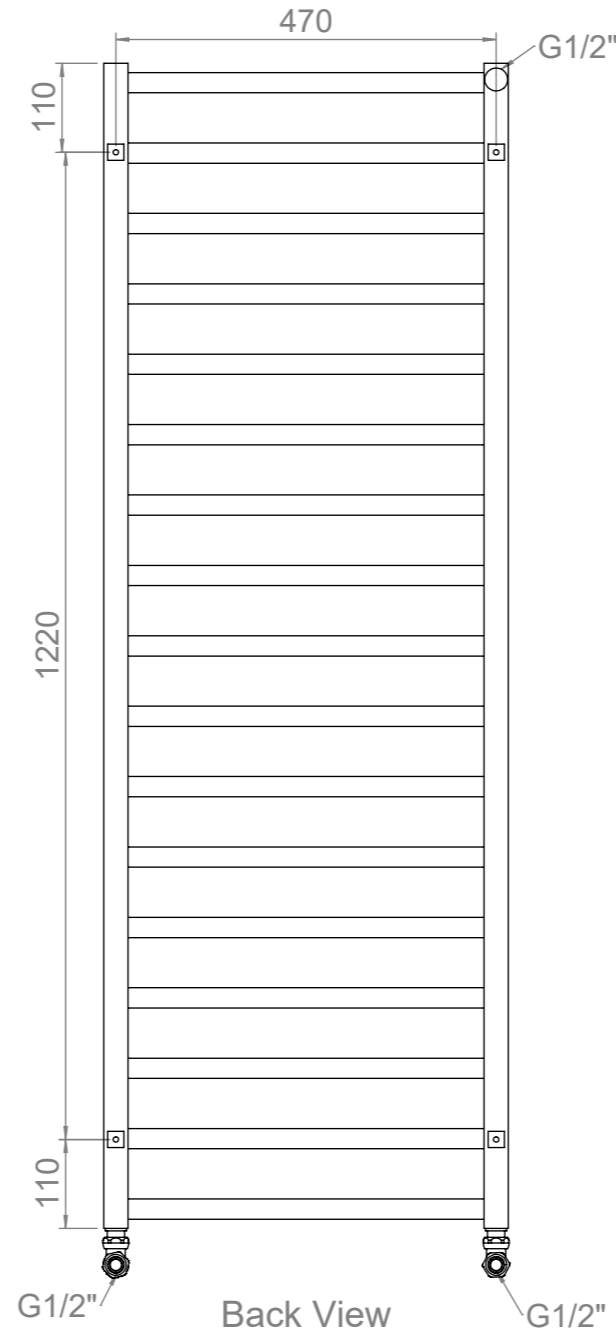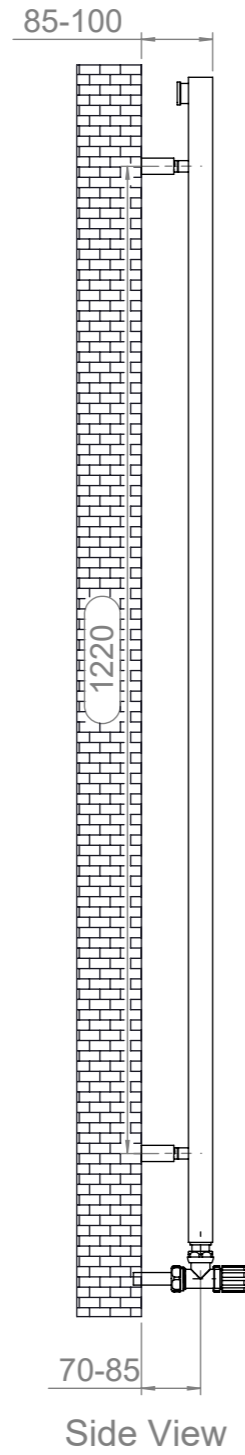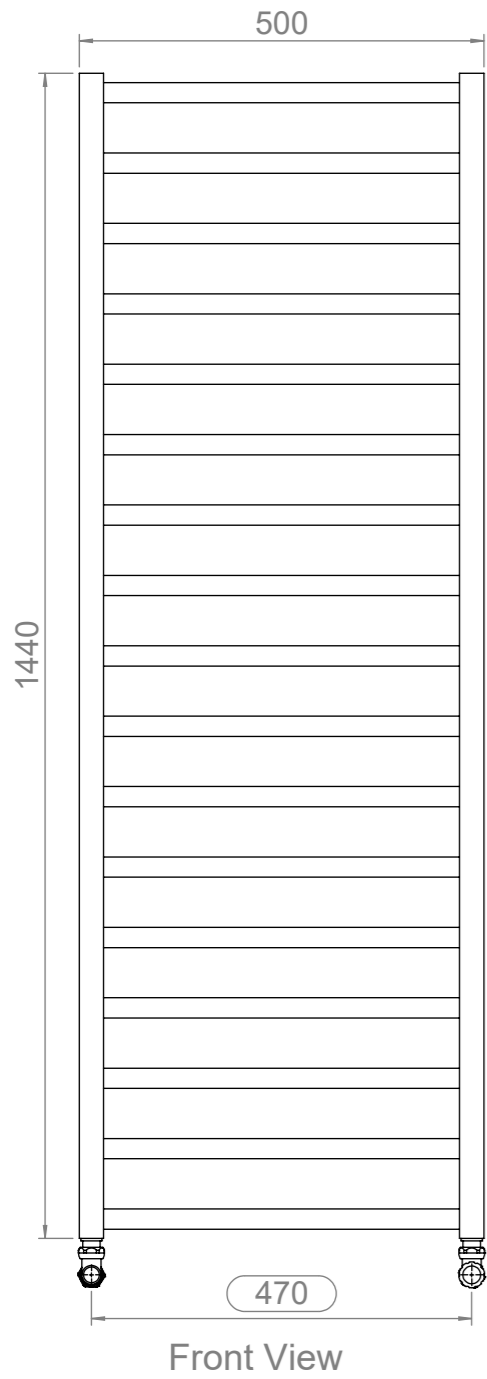
ALL MEASUREMENTS ARE IN MILLIMETRES | MANUFACTURED FROM MILD STEEL

5K14




Installation Accessories:

-  x4
-  x4
-  x4
-  x4
-  x4
-  x1

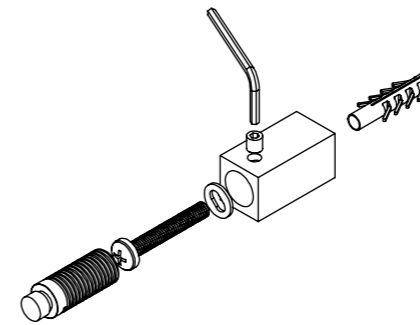

Fitting Position:

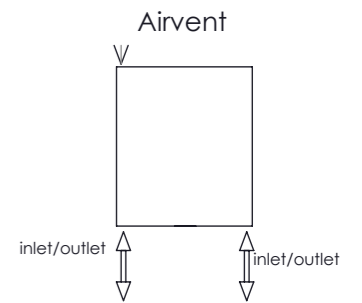

All Dimensions are in mm
 Max. Working Pressure: 10 Bar
 Max. Working Temperature: 95° C
 Inlet / Outlet : 1/2" BSP
 Fuel Type: H