



E.SIGN

**EUROPEAN
WARRANTY**

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves with thermostatic head

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiator and accessories: standard white colour R01.

PRODUCT CERTIFICATES



Pression maximale de service: 5 bar

Température maximale de service: 110° C


Available for central heating systems


Connexions: n° 2 x 1/2" gaz - n° 2 x 1/2" gaz

AWARDS




REVERSIBLE






E.SIGN

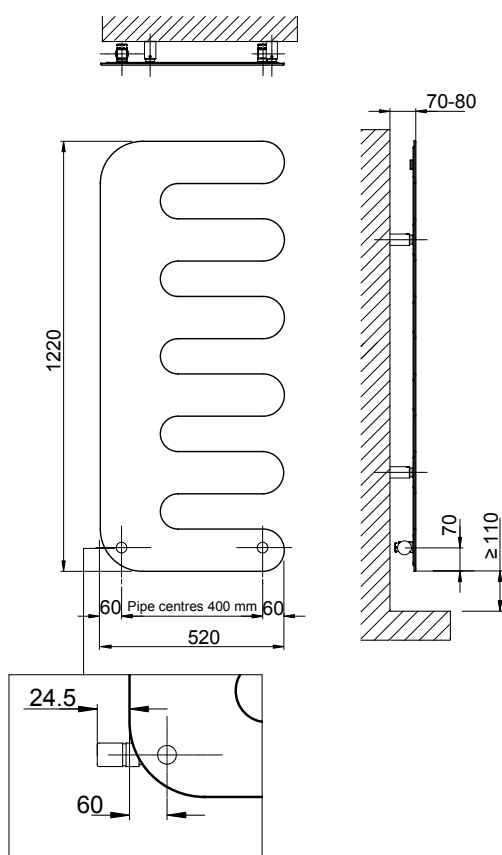

E.SIGN
PIPE CENTRES 50 MM

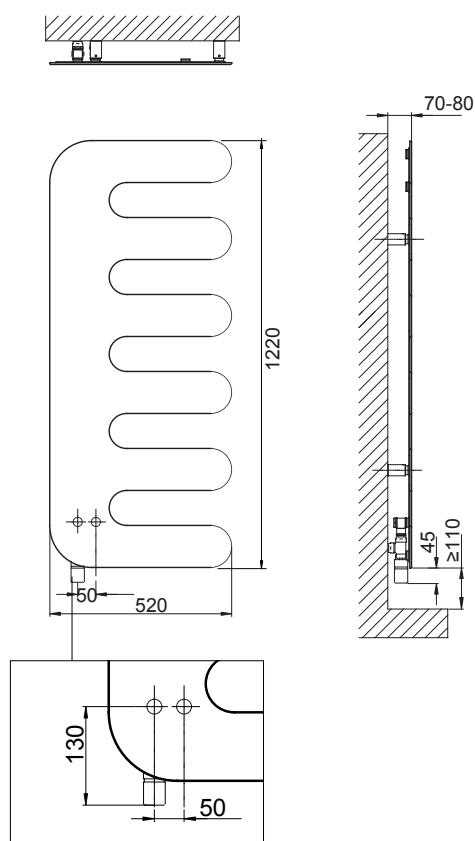

E.SIGN

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------------------|---------------------------------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | $\Delta t = 50^{\circ}\text{C}$ | $\Delta t = 30^{\circ}\text{C}$ | |
| 3540806100210 | 1220 | 520 | 400 | 16,2 | 0,9 | 1,3 | 508 | 272 | 1,2225 |

Art. Nr. are referred to colour WHITE R01 - version.

Include valve kit and thermostatic head, in accordance with EN215:2007.

E.SIGN PIPE CENTRES 50 MM

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|---------|---------------|---------------------------------|---------------------------------|------------|
| | H [mm] | L [mm] | I [mm] | [Kg] | [m²] | [lt] | $\Delta t = 50^{\circ}\text{C}$ | $\Delta t = 30^{\circ}\text{C}$ | |
| 3540806100220 | 1220 | 520 | 50 | 16,2 | 0,9 | 1,3 | 508 | 272 | 1,2225 |

Art. Nr. are referred to colour WHITE R01 - version.

Include valve kit and thermostatic head, in accordance with EN215:2007.

For output at different Δt than 50°C , please refer to the following formula: desired output = output at $\Delta t 50^{\circ}\text{C} \times (\text{desired } \Delta t / 50)^n$