










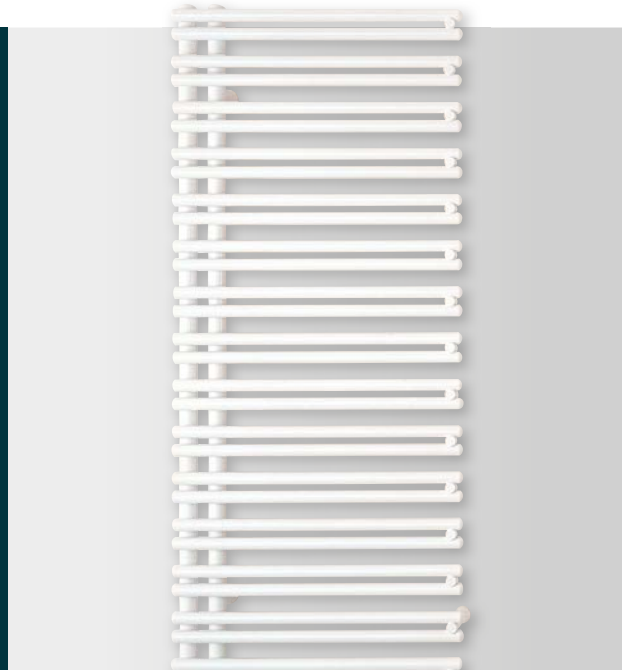




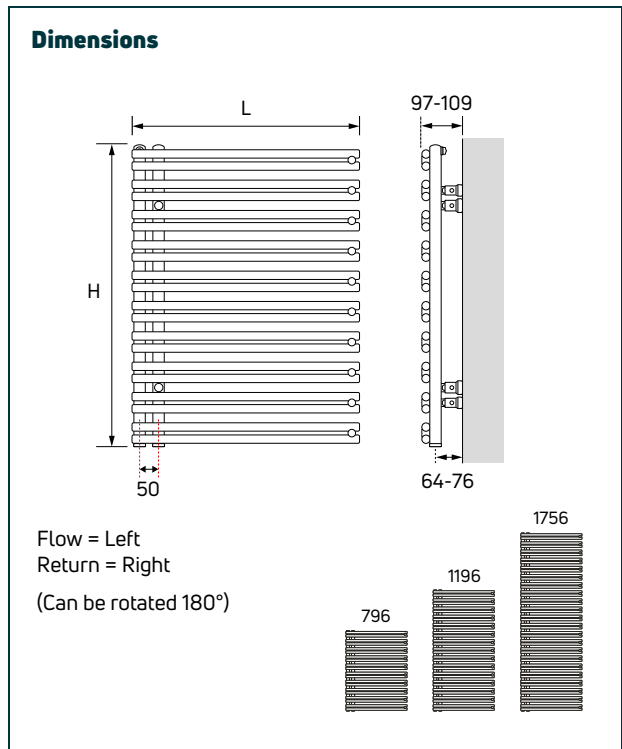
FATALA

Introduce contemporary elegance into your home with FATALA. Its attractive yet simple asymmetric design is both stylish and practical and will add a fresh modern look to a bathroom or living room. It's available in white or your choice of RAL colour as well as our special textured, metallic or shimmer metallic finishes.



General specification

- 
CERTIFICATION
 Manufactured and tested to EN 442. Carries the CE Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 
ACCESSORIES
 Please see page 139.
- 
SYSTEM
 2 pipe pumped indirect domestic and commercial heating applications.
- 
CONNECTIONS
 2 x 1/2" BSP as standard.
- 
AIR VENTS
 Included in the packaging.
- 
OPERATING PRESSURES
 Tested to a pressure of 13 bar. Working pressure of up to 10 bar.
- 
GUARANTEE
 10 year guarantee from date of purchase against manufacturing defects.
- 
DELIVERY
 Non-stocked item: 4 - 6 weeks.
- 
CLOUR
 Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 262.
- 
VALVES
 Please see page 138.
- 
MATERIAL
 Manufactured from steel.



For more general information, please see page 260.

Weights, water contents & n-coefficients

Model	Weight (kg)	Water Content (l)	n-Coefficient
MAE1	8.90	3.80	1.189
MAE2	13.30	5.90	1.202
MAE3	19.50	8.00	1.241

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
MAE1	796	500	446	1522	243	829
MAE2	1196	500	650	2218	352	1201
MAE3	1756	500	897	3061	476	1624