



# GIULY®

design **Mariano Moroni**

**EUROPEAN  
WARRANTY**

**MATERIAL:**

Super slim heating body in painted carbon steel.

**FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

**VALVE KIT INCLUDES:**

Valves with thermostatic head  
Fittings for copper pipe (Ø 12/14/15)  
Fittings for multilayer pipe (Ø 16)

**PACKAGING:**

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

**PAINTING PROCESS:**

Painted with ecological epoxy. (Certificate DIN 55900-1,-2). Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

**COLOURS:**

Radiator and accessories: standard white colour R01.

## PRODUCT CERTIFICATES



Pression maximale de service: 5 bar

Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz


## AWARD



product  
design award

2014



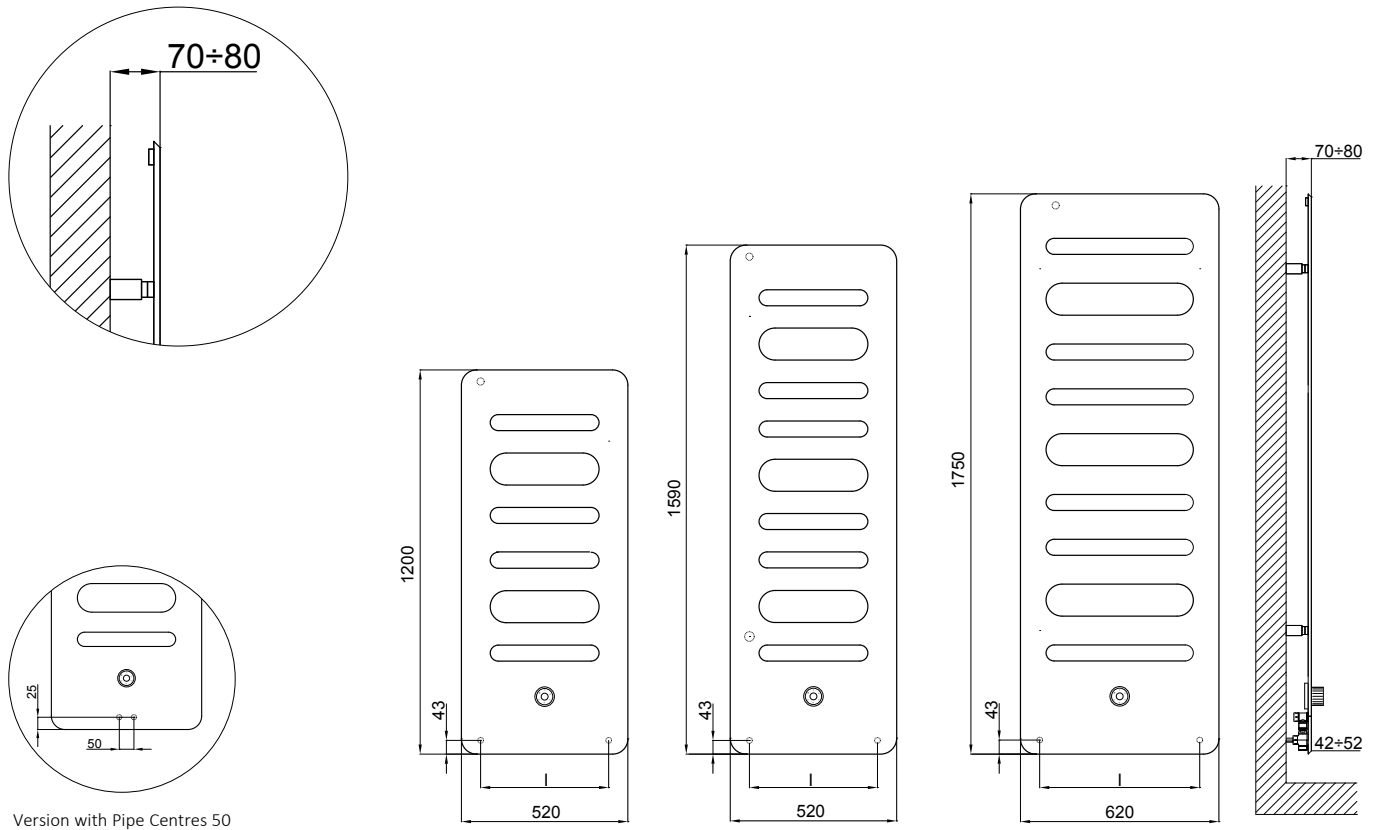

Version with Pipe Centres 50

## GIULY®

| Art. Nr.      | Height      | Width  | Pipe Centres | Dry Weight | Surface           | Water Content | Thermal output Watt             |                                 | Exponent n |
|---------------|-------------|--------|--------------|------------|-------------------|---------------|---------------------------------|---------------------------------|------------|
|               | H [mm]      | L [mm] | I [mm]       | [Kg]       | [m <sup>2</sup> ] | [lt]          | $\Delta t = 50^{\circ}\text{C}$ | $\Delta t = 30^{\circ}\text{C}$ |            |
| 3540806100204 | <b>1200</b> | 520    | 400          | 16         | 0,9               | 0,9           | 521                             | 274                             | 1,2603     |
| 3540806100205 | <b>1590</b> | 520    | 400          | 20         | 1,16              | 1,16          | 714                             | 377                             | 1,2518     |
| 3540806100207 | <b>1750</b> | 620    | 500          | 26         | 1,5               | 1,5           | 900                             | 467                             | 1,2849     |

Art. Nr. are referred to colour WHITE R01 version.

Include valve and thermostatic head, in accordance with EN215:2007.

## GIULY® PIPE CENTRES 50 MM

| Art. Nr.      | Height      | Width  | Pipe Centres | Dry Weight | Surface           | Water Content | Thermal output Watt             |                                 | Exponent n |
|---------------|-------------|--------|--------------|------------|-------------------|---------------|---------------------------------|---------------------------------|------------|
|               | H [mm]      | L [mm] | I [mm]       | [Kg]       | [m <sup>2</sup> ] | [lt]          | $\Delta t = 50^{\circ}\text{C}$ | $\Delta t = 30^{\circ}\text{C}$ |            |
| 3540806100201 | <b>1200</b> | 520    | 50           | 16         | 0,9               | 0,9           | 521                             | 274                             | 1,2603     |
| 3540806100202 | <b>1590</b> | 520    | 50           | 20         | 1,16              | 1,16          | 714                             | 377                             | 1,2518     |
| 3540806100203 | <b>1750</b> | 620    | 50           | 26         | 1,5               | 1,5           | 900                             | 467                             | 1,2849     |

Art. Nr. are referred to colour WHITE R01 version.

Include valve and thermostatic head, in accordance with EN215:2007.

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula: desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>



# GIULY® SL

design **Mariano Moroni**

**EUROPEAN  
WARRANTY**

**MATERIAL:**

Super slim heating body in painted carbon steel.

**FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

**VALVE KIT INCLUDES:**

Valves

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16)

**PACKAGING:**

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

**PAINTING PROCESS:**

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

**COLOURS:**

Radiator and accessories: standard white colour R01.

## PRODUCT CERTIFICATES



Pression maximale de service: 5 bar


Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz

## AWARD



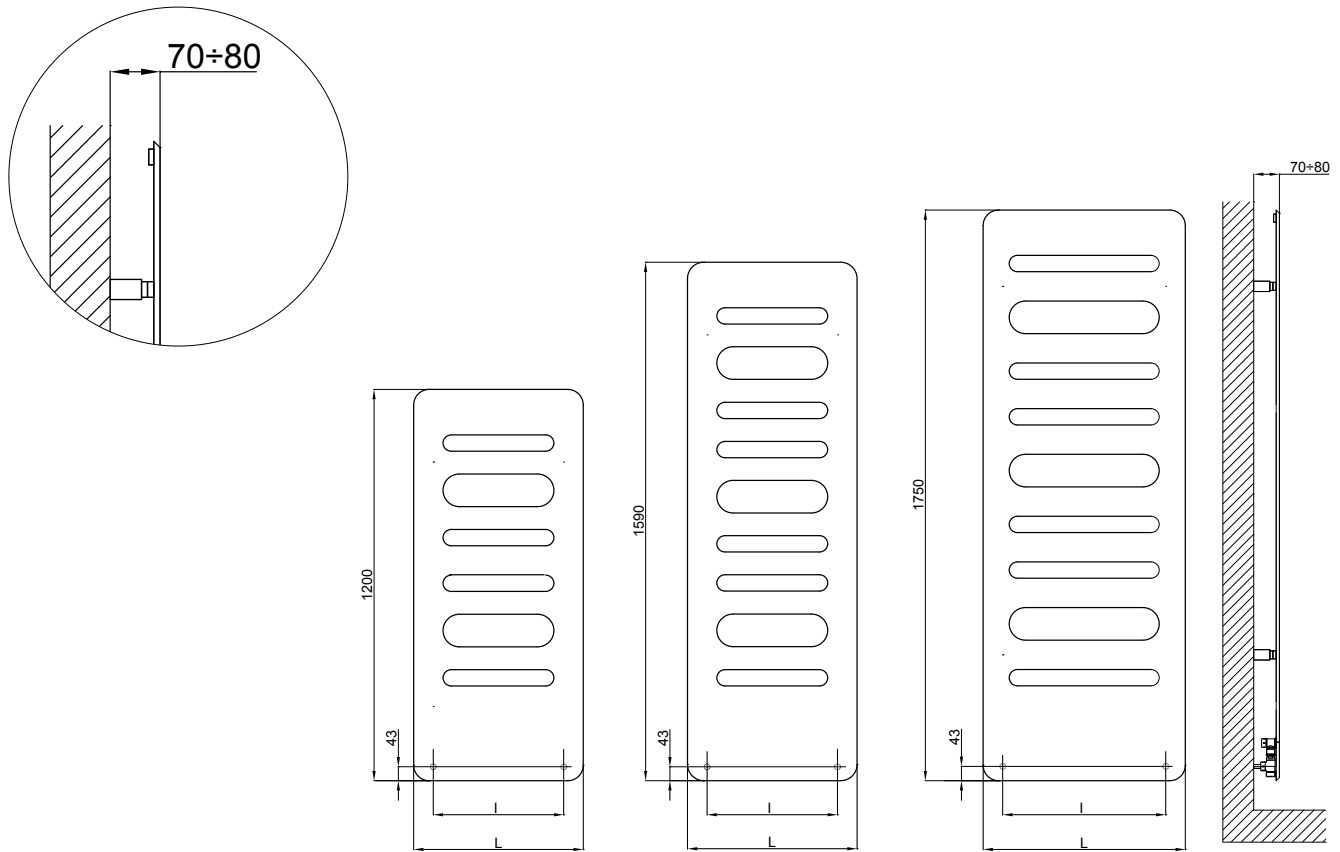

## GIULY® SL

| Art. Nr.      | Height      |        | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt             |                                 | Exponent n |
|---------------|-------------|--------|-------|--------------|------------|---------|---------------|---------------------------------|---------------------------------|------------|
|               | H [mm]      | L [mm] |       |              |            |         |               | $\Delta t = 50^{\circ}\text{C}$ | $\Delta t = 30^{\circ}\text{C}$ |            |
| 3540806100222 | <b>1200</b> | 520    | 400   | 16           | 0,90       | 0,90    | 523           | 275                             | 1,2610                          |            |
| 3540806100223 | <b>1590</b> | 520    | 400   | 20           | 1,16       | 1,16    | 718           | 379                             | 1,2510                          |            |
| 3540806100225 | <b>1750</b> | 620    | 500   | 26           | 1,50       | 1,50    | 903           | 468                             | 1,2850                          |            |

Art. Nr. are referred to colour WHITE R01 version.

Includes valves.

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula: desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>