



STRADIVARI VERTICAL

SATIN STAINLESS STEEL

design **Luca Scacchetti**

**15 YEARS
WARRANTY**

MATERIAL:

Horizontal collectors in satin stainless steel.
Vertical heating elements in satin stainless steel.

FIXING KIT:

Brackets, airvent, blind plug, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing.
Brightness guaranteed during the years.
Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



Pression maximale de service: 8 bar

Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 4 x 1/2" gaz

AWARD

CASANOVA ROOM

NUMBER 3

ACCESSORIES



Elegant manual square satin valve

Copper connection Ø 12/14/15
Art. Nr. 5991990320209

Multilayer connection Ø 16
Art. Nr. 5991990320208



Elegant corner sx with thermostatic head satin valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990320205

Multilayer connection Ø 16
Art. Nr. 5991990320203



Elegant corner dx with thermostatic head satin valve kit

Copper connection Ø 12/14/15
Art. Nr. 5991990320204

Multilayer connection Ø 16
Art. Nr. 5991990320202



Elegant square with thermostatic head satin valve





Copper connection Ø 12/14/15
Art. Nr. 5991990320197

Multilayer connection Ø 16
Art. Nr. 5991990320196



Sleeving kit for satin valves

Art. Nr. 5103000000045

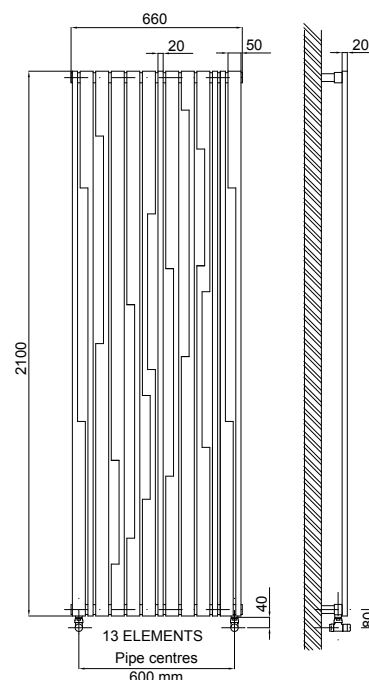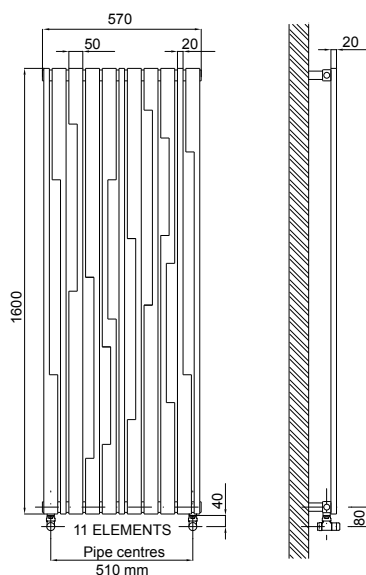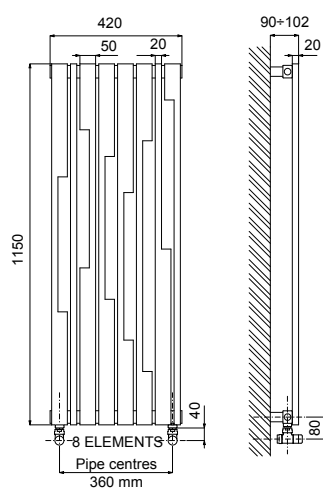

STRADIVARI VERTICAL - SATIN STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]	I [mm]	[Kg]	[m ²]	[lt]	$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3620760450005	1150	420	360	14	1,80	6	378	196	1,2900
3620760450001	1600	570	510	25	2,40	9,3	713	365	1,3103
3620760450002	2100	660	600	37	3,14	15	1084	558	1,3000

For output at different Δt than 50°C , please refer to the following formula: desired output = output at $\Delta t 50^{\circ}\text{C} \times (\text{desired } \Delta t / 50)^n$