

Halo



Horizontal 133 diameter x 2000 in Matt Black 9005



Vertical 1800mm x 155mm diameter, shown in Metallic Silver with Pistol TRV's.

Halo

 shown on page 62-63

High quality Italian design & manufacture.
Steel; 87mm, 133mm, 155mm 180mm & 187mm fins
UKCA approved & certified to BS EN442

Matt White RAL 9016 as standard, 188 RAL colours plus 2 Special Finishes; Metallic Silver & Matt Black. Please call **01342 302250** for a RAL chart

Made to Order sizes & colours: Up to 7 weeks for white
Up to 7 weeks for colours, 9 weeks for chrome



SAVE MONEY! WHEN YOU BUY OUR **IDEAL TRV KIT** WITH ANY DESIGNER ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome

Halo Horizontal	Pipe centres left to right	Pipe centres from wall
Halo 130mm	width + valves	minimum of 65mm
Halo 190mm	width + valves	minimum of 90mm
Halo 250mm	width + valves	minimum of 120mm

Made to order options - Horizontal White & Colours


Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}c$	BTU's $\Delta t 50^{\circ}c$
130	1000	HALOI310	269	918
	1500	HALOI315	413	1409
	2000	HALOI320	557	1900
190	1000	HALOI910	401	1368
	1500	HALOI915	616	2102
	2000	HALOI920	831	2835
250	1000	HALO2510	993	3388
	1500	HALO2515	1490	5084
	2000	HALO2520	1969	6718

Made to order options - Horizontal Chrome

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}c$	BTU's $\Delta t 50^{\circ}c$
190	1000	HALOI910C	353	1204
	1500	HALOI915C	542	1849
	2000	HALOI920C	731	2494
250	1000	HALO2510C	874	2982
	1500	HALO2515C	1311	4473
	2000	HALO2520C	1733	5913

Made to order options - Horizontal Electric

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}c$
180	1015	HALOE1810	500
	1515	HALOE1815	750
	2015	HALOE1820	1000

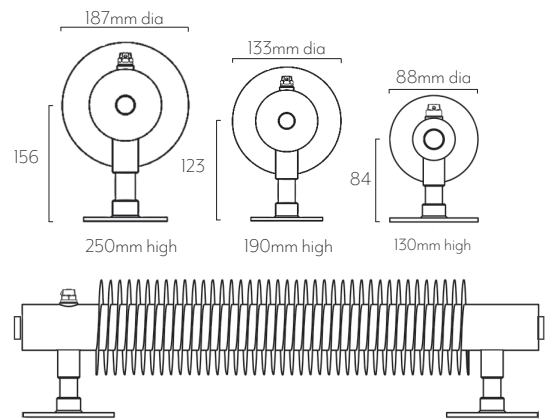


Halo Vertical	Pipe centres left to right	Pipe centres from wall	Depth from wall
Halo 155mm	60mm	148mm	225mm

Made to order options - Vertical White & Colours

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}c$	BTU's $\Delta t 50^{\circ}c$
1500	155	HALOV1515	865	2951
1800	155	HALOV1815	1040	3548
2000	155	HALOV2015	1153	3934

Made to order options - Vertical Chrome

Height (mm)	Width (mm)	Model	Watts $\Delta t 50^{\circ}c$	BTU's $\Delta t 50^{\circ}c$
1500	155	HALOV1515C	761	2597
1800	155	HALOV1815C	915	3122
2000	155	HALOV2015C	1015	3463

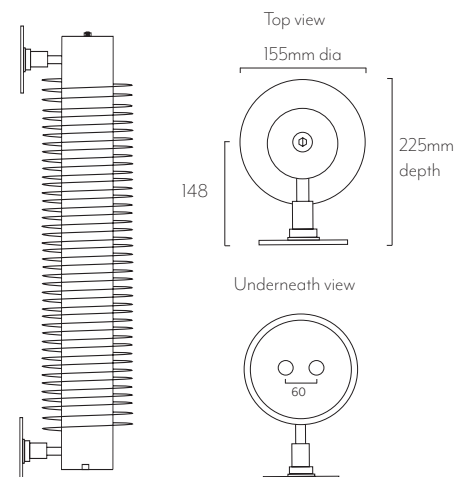

*Saving based on the value of individual items when bought separately.

Order any of our selected valves & matching pipe covers at the same time as your radiator; **PROMOVIW** (white), **PROMOVIC** (chrome).

Technical Specifications

Materials	Steel
Connections	½" flow and return.
Test pressure	12 Bar
Testing authority	EN442
Maximum operating pressure	8 Bar
Maximum working temperature	95°C
Packaging	Encased in polystyrene, seated within a cardboard box

PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system.

Terms & Conditions

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage. The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

Guarantees & Liabilities

As we are not the manufacturers of this product we will take all reasonable endeavours to make over to you the benefit of any warranty or guarantee given by the manufacturer, which is usually five years on most of our range. (Copies of specific guarantees for any of our products are available on request).

The guarantees in all cases are subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantees in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

Fittings Instructions



The Halo is a classic contemporary design. Industrial and low level in style, the design works well in open plan areas with large expanses of glass.

Please read these instructions and terms and conditions carefully prior to installation. Failure to do so may invalidate the warranty

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU



HALOH1.2


Technical Data

Fixing Centres


130mm Height = Length (mm) - 90mm

190mm Height = Length (mm) - 96mm


250mm Height = Length (mm) - 96mm




130mm Height

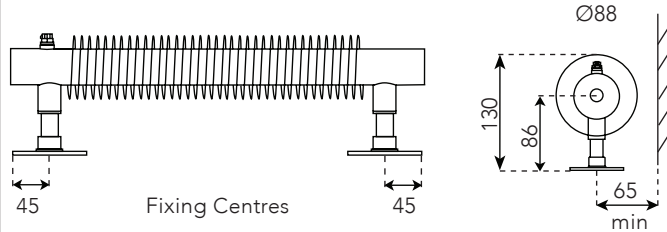

190mm Height

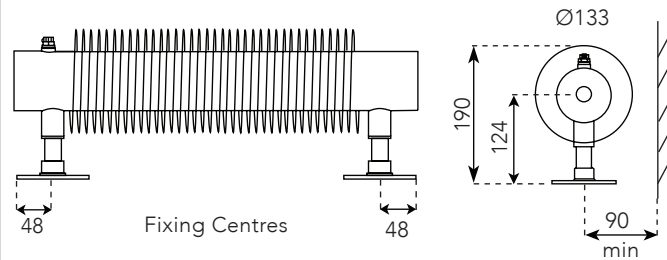

250mm Height

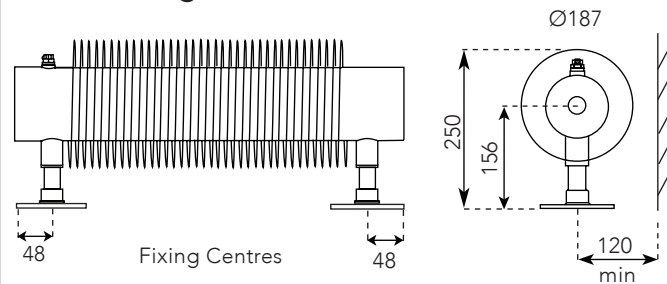

Pipe Centres

Pipe centres left to right = width plus valves

Pipe centres from wall

130mm Height = minimum of 65mm

190mm Height = minimum of 90mm

250mm Height = minimum of 120mm

1 Unpack & Inspect

The Radiator Company prides itself on selecting products from manufacturers who exercise tight quality control measures. We only select models with excellent standards of welding and brazing, as well as high quality finishes. All of our products are well packaged and should reach you in perfect condition. Just in case however, we offer a minimum 5-year no quibble guarantee for all radiators and towel rails.

The Radiator Company must be notified of any shortages or damage within 28 days of delivery. For further information please see terms and conditions on back page.



Please Note: This radiator may only be installed horizontally on floor

2 Contents

You should have:

- 1 Radiator
- 1 Air Vent
- 1 Air Vent Key

You will need:

- 6 Screws; 4mm dia x 60mm
- Suitable Valves
- PTFE tape
- Silicone thread sealant
- Tape measure
- Spanner; 17mm
- Screwdriver
- Electric drill
- Suitable drill bit


3 Fit Radiator

Please Note:

Sufficient PTFE tape must be applied to valve threads prior to their installation. Silicone thread sealant should be applied to all threaded components manufactured with 'O-Rings'.

Assembly Instructions:

- 1) Fit valves (not supplied).
- 2) Fit supplied air vent (A)
- 3) Accurately mark out holes for mounting feet on floor to dimensions shown within the Technical Data section (see left).
- 4) Once marked out, drill four holes to suit screws (B)
- 5) Fix radiator to floor with screws (B)

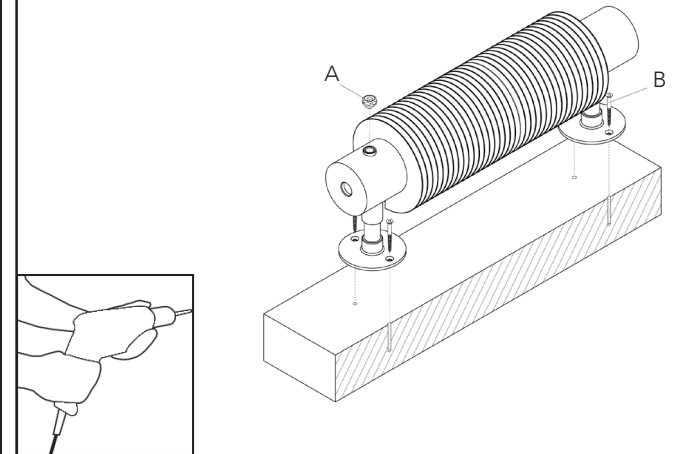

4 Commission Radiator

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer's guarantee.

Technical Specifications

Materials	Steel
Connections	½" flow and return.
Test pressure	12 Bar
Testing authority	EN442
Maximum operating pressure	8 Bar
Maximum working temperature	95 °C
Packaging	Encased in polystyrene, seated within a cardboard box

PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system.

Terms & Conditions

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage. The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

Guarantees & Liabilities

As we are not the manufacturers of this product we will take all reasonable endeavours to make over to you the benefit of any warranty or guarantee given by the manufacturer, which is usually five years on most of our range. (Copies of specific guarantees for any of our products are available on request).

The guarantees in all cases are subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantees in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

Fittings Instructions



The Halo is a classic contemporary design. Industrial and eye catching making use of tall spaces.


Please read these instructions and terms and conditions carefully prior to installation. Failure to do so may invalidate the warranty

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU



HALOV1.2

Diagrams of Halo

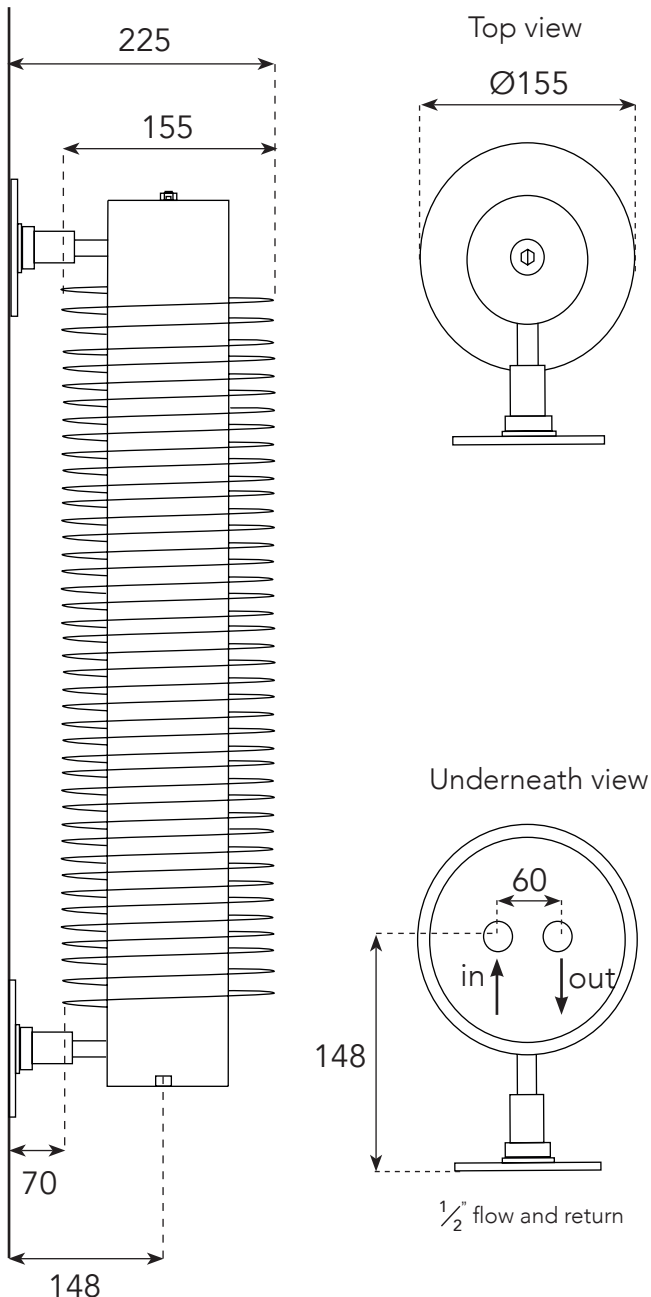

Pipe Centres

Pipe centres left to right	60mm
Pipe centres from wall	148mm
Depth from wall	225mm

1 Unpack & Inspect

The Radiator Company prides itself on selecting products from manufacturers who exercise tight quality control measures. We only select models with excellent standards of welding and brazing, as well as high quality finishes. All of our products are well packaged and should reach you in perfect condition. Just in case however, we offer a minimum 5-year no quibble guarantee for all radiators and towel rails.



The Radiator Company must be notified of any shortages or damage within 28 days of delivery. For further information please see terms and conditions on back page.

2 Contents

You should have:

- 1 Radiator
- 1 Airvent
- 1 Fixing Kits including: 4 screws and 4 wall plugs

You will need:

- Tape measure
- Electric drill and bits
- Spirit level



Please Note: The supplied fixings are not suitable for all wall types. Please ensure the correct fixings are used for your wall type.

3 Hang Radiator

1. Hold up the radiator to the wall and mark through the drill holes of the brackets.

2. Take down the radiator and using a spirit level, ensure the brackets are vertically aligned.

3. With the bracket markings level, fix the bracket to the wall using suitable drill bits and plugs.

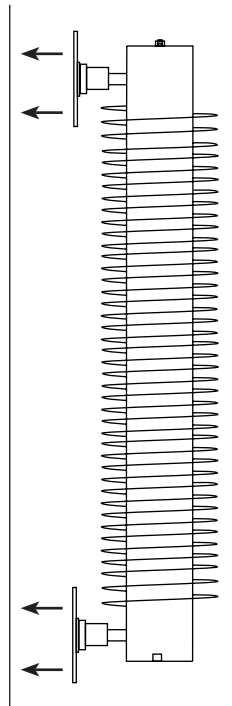

PLEASE NOTE :

It is essential that all brackets are level to ensure a vertical alignment for connecting the pipework.

4 Commission

Please Note:

In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer's guarantee.