

Relax



Double horizontal 578mm x 1401mm shown in RAL 9007 with Nickel Corner Ideal TRV's



Single vertical

Inox single vertical 1853mm x 381mm in Polished Stainless Steel with Chrome Corner Ideal TRV's

Relax horizontal

shown on page 60

High quality Italian design & manufacture.
Steel; Slimline round tube on tube radiator cloaked in a steel cover
UKCA approved & certified to BS EN442

White RAL 9016 as standard, 188 RAL colours plus 30 Special Finishes
Please call **01342 302250** for a RAL or Special Finish chart

Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks

Relax horizontal	Pipe centres left to right	Pipe centres from wall	Depth from wall
Single horizontal	width - 109mm	55mm	88mm

Stock options White RAL 9016 - Single Horizontal

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
478	1197	RELASH471I	665	2269
578	1197	RELASH571I	824	2811

Made to order options - Single Horizontal

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
478	1401	RELASH4714	783	2672
	1809	RELASH4718	1019	3477
	2013	RELASH4720	1137	3879
578	1401	RELASH5714	970	3310
	1809	RELASH5718	1262	4306
	2013	RELASH5720	1408	4804

Relax horizontal	Pipe centres left to right	Pipe centres from wall	Depth from wall
Double horizontal	width - 109mm	79mm to 89mm	112mm to 122mm

Stock options White RAL 9016 - Double Horizontal

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
478	1197	RELADH471I	1045	3566
578	1197	RELADH571I	1294	4415

Made to order options - Double Horizontal

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
478	1401	RELADH4714	1231	4200
	1809	RELADH4718	1602	5466
	2013	RELADH4720	1787	6097
578	1401	RELADH5714	1524	5200
	1809	RELADH5718	1983	6766
	2013	RELADH5720	2213	7551

*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOVIW (white), PROMOVIC (chrome).




SAVE MONEY! WHEN YOU BUY OUR
IDEAL TRV KIT WITH ANY DESIGNER
ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome



Single

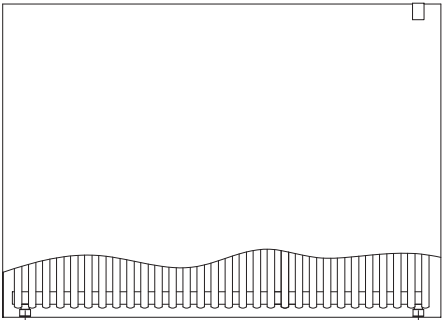

Double



Relax vertical

shown on page 61

High quality Italian design & manufacture.
Steel; Slimline round tube on tube radiator cloaked in a steel cover
UKCA approved & certified to BS EN442

White RAL 9016 as standard, 188 RAL colours plus 30 Special Finishes
Please call **01342 302250** for a RAL or Special Finish chart

Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks for white & colours
Up to 8 weeks for Polished Stainless Steel

Relax vertical	Pipe centres left to right	Pipe centres from wall	Depth from wall
Single vertical	width - 109mm	55mm	88mm

Stock options White RAL 9016 - Single Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
1853	517	RELASV185I	1178	4019
	653	RELASV1865	1519	5183

Made to order options - Single Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
1553	381	RELASV1538	699	2385
	517	RELASV155I	984	3357
	653	RELASV1565	1269	4330
1853	381	RELASV1838	837	2856

Relax vertical	Pipe centres left to right	Pipe centres from wall	Depth from wall
Double vertical	width - 109mm	79mm - 89mm	112mm - 122mm

Stock options White RAL 9016 - Double Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
1853	517	RELADV185I	1477	5040
	653	RELADV1865	1817	6200

Made to order options - Double Vertical


Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
1553	381	RELADV1538	1017	3470
	517	RELADV155I	1431	4883
	653	RELADV1565	1591	5428
1853	381	RELADV1838	1050	3583

*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOVIW (white), PROMOVIC (chrome).




SAVE MONEY! WHEN YOU BUY OUR
IDEAL TRV KIT WITH ANY DESIGNER
ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome



Made to order options - Inox Single Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
1553	381	REINSV1538	489	1668
	517	REINSV155I	689	2351
	653	REINSV1565	888	3030
1853	381	REINSV1838	586	1999
	517	REINSV185I	825	2815
	653	REINSV1865	1063	3627
2053	381	REINSV2038	650	2218
	517	REINSV205I	915	3122
	653	REINSV2065	1180	4026



Made to order options - Inox Double Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°c	Btu's Δt 50°c
1553	381	REINDV1538	712	2429
	517	REINDV155I	1002	3419
	653	REINDV1565	1114	3801
1853	381	REINDV1838	735	2508
	517	REINDV185I	1034	3528
	653	REINDV1865	1272	4340
2053	381	REINDV2038	778	2655
	517	REINDV205I	1095	3736
	653	REINDV2065	1397	4767


RELAX single Vertical
RELAX single Horizontal

Fitting Instructions

Accessories not included


Cmax = Maximum torque
C min = Minimum tightening torque

mm

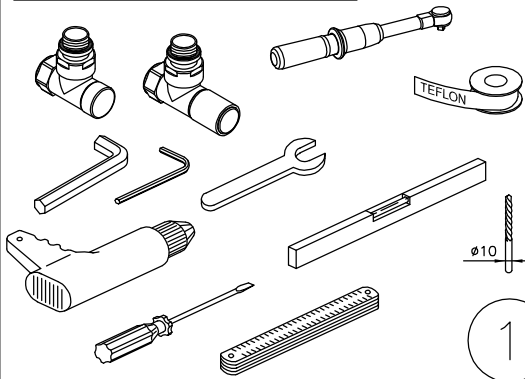


1


Accessories included




Dowels and screws to be
used only on compact
walls or hollow bricks.




2



3





4




A:Vertical
H:Horizontal

5






OK




(*):
EXAMPLE WITH RELAX VERTICAL


6




7

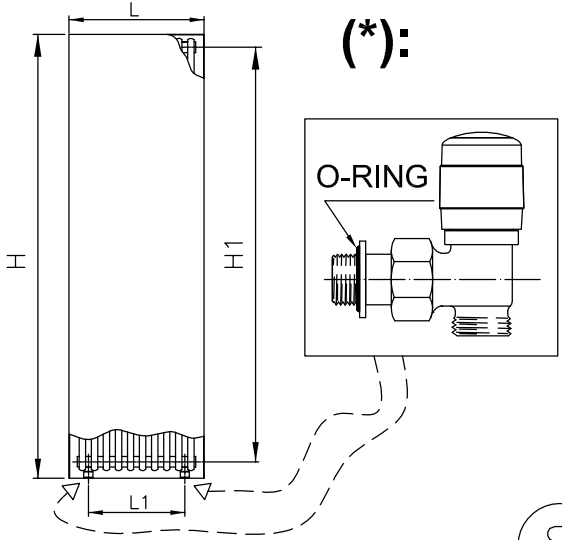

8

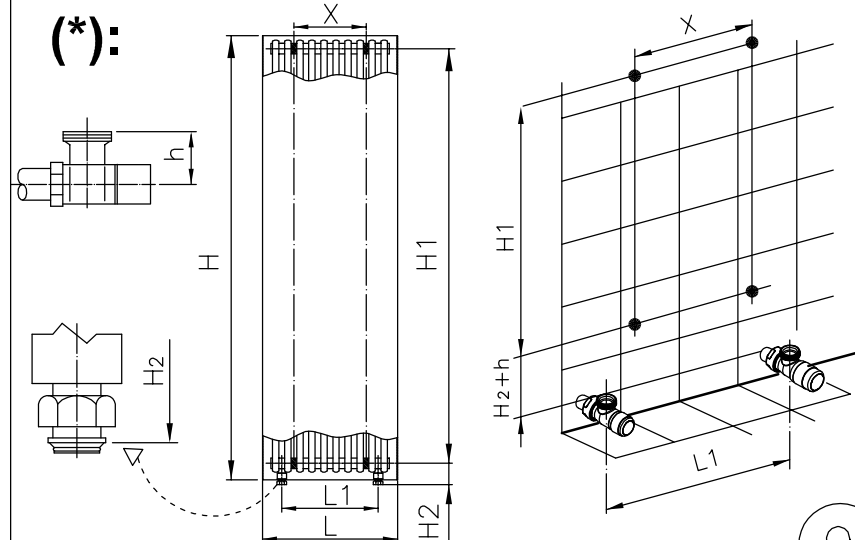


9

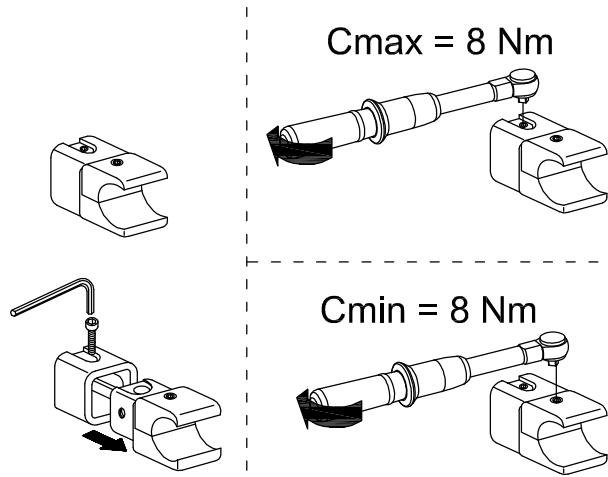


10

Cmax = 8 Nm

Cmin = 8 Nm

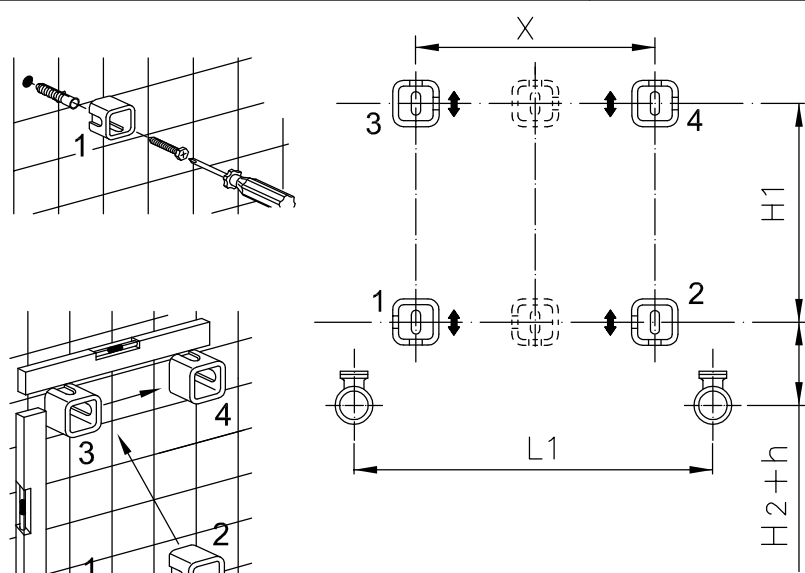


11

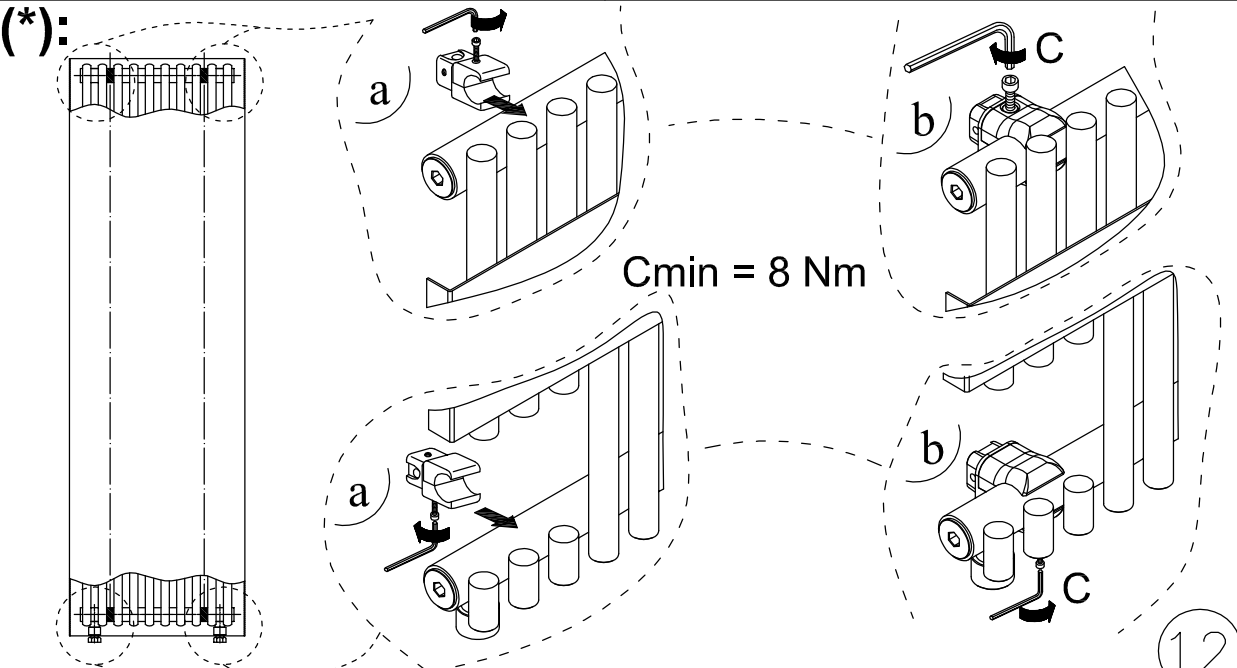


12

Cmin = 8 Nm

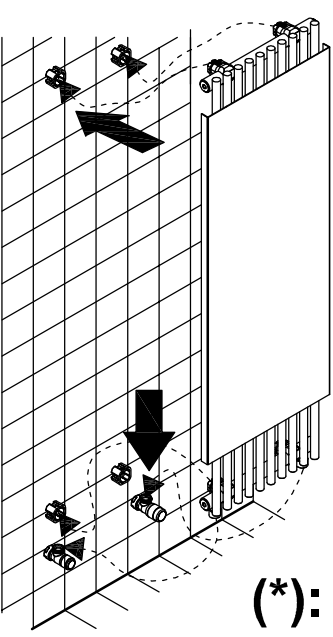


13

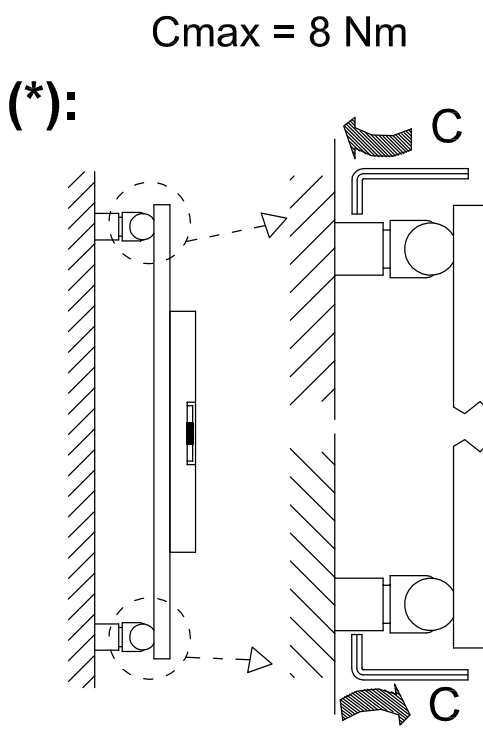


14

Cmax = 8 Nm

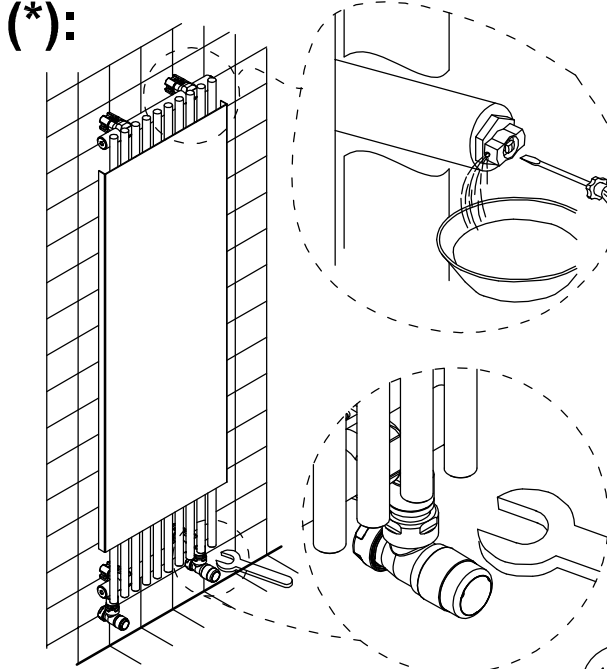

15

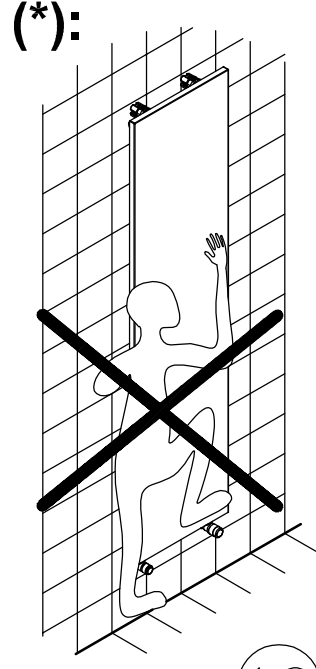

16

(*):

COMMISSION

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer’s guarantee.

TECHNICAL SPECIFICATIONS

Materials	Mild Steel.
Connections	½ flow and return.
Test pressure	6 Bar
Testing authority	EN 442
Maximum operating pressure	4 Bar
Maximum working temperature	95°C
Packaging	Wrapped in polyethylene with cardboard box.
PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system.	

TERMS & CONDITIONS

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage.

The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

GUARANTEES & LIABILITIES

This product is guaranteed for 10 years . The guarantee is subject to the product being installed in accordance with British and or European standards as well as these fitting instructions. The guarantee in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU

A brand of **IRSAP** , Italy’s leading manufacturer of design led radiators.

If you have any questions please contact us on 01342 302250
www.theradiatorcompany.co.uk


RELAX double Vertical
RELAX double Horizontal

Fitting Instructions

Accessories not included

Cmax = Maximum torque
C min = Minimum tightening torque

mm

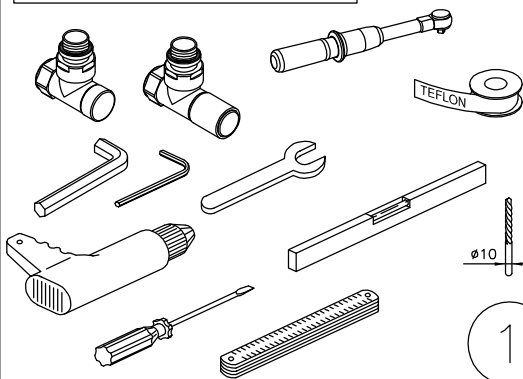


1

Accessories included




2


Dowels and screws to be used only on compact walls or hollow bricks.

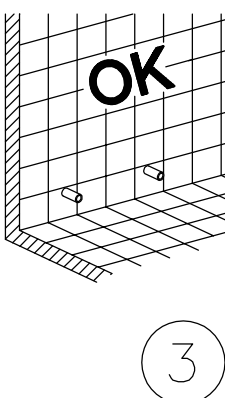

3

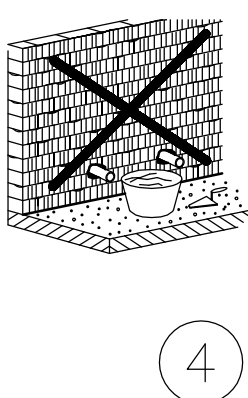


4

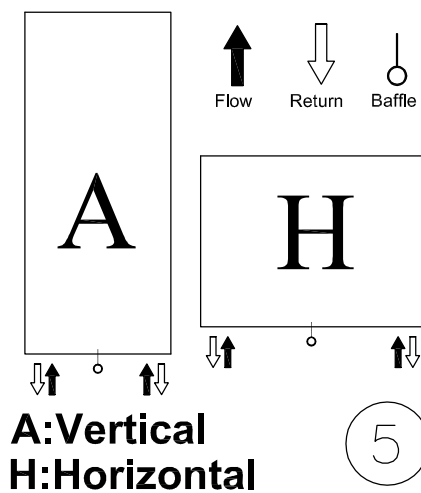


5


A:Vertical
H:Horizontal

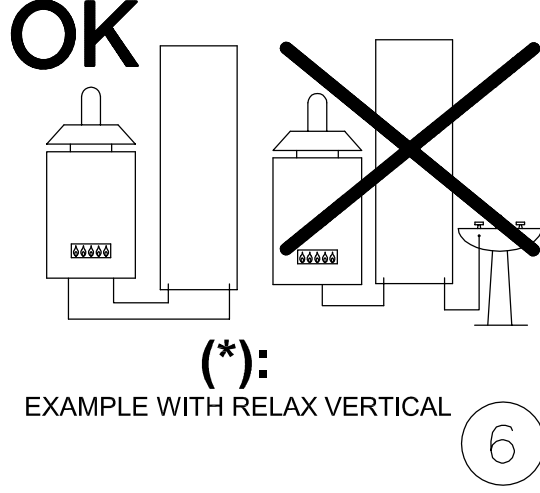


6

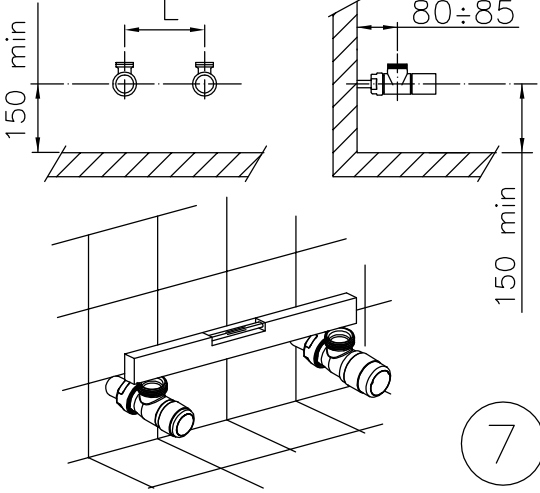


7

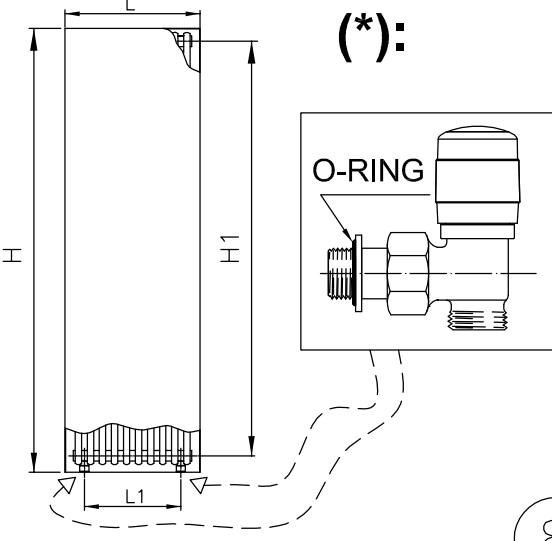


8

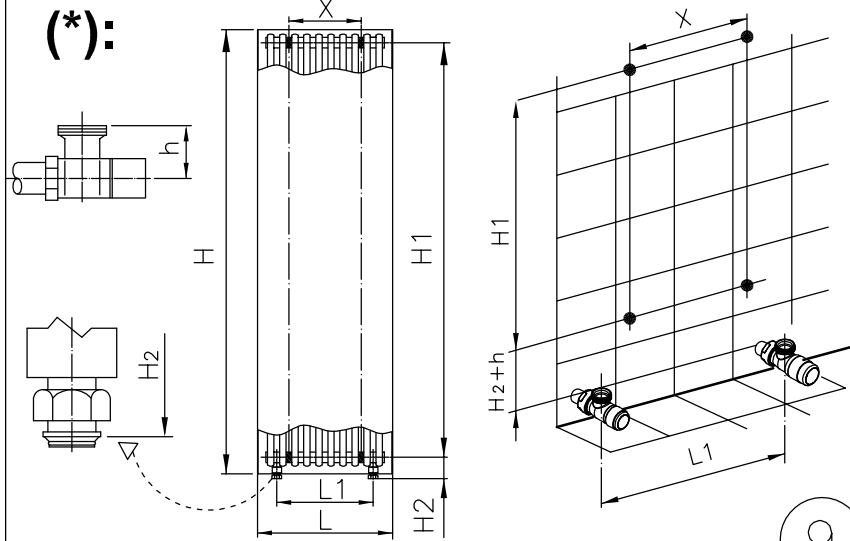


9

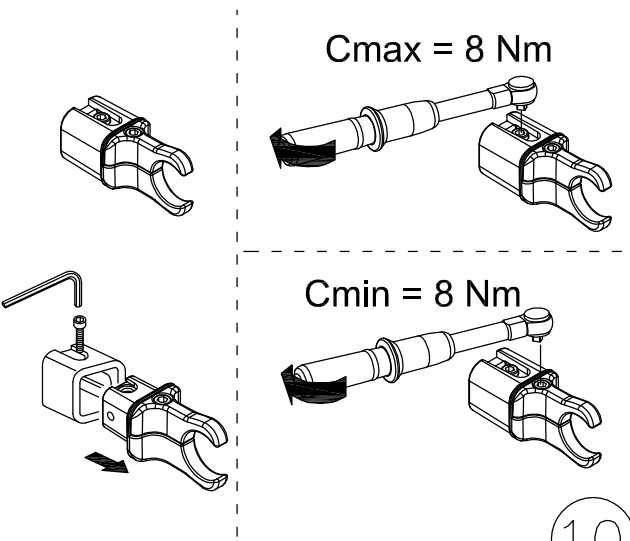


10

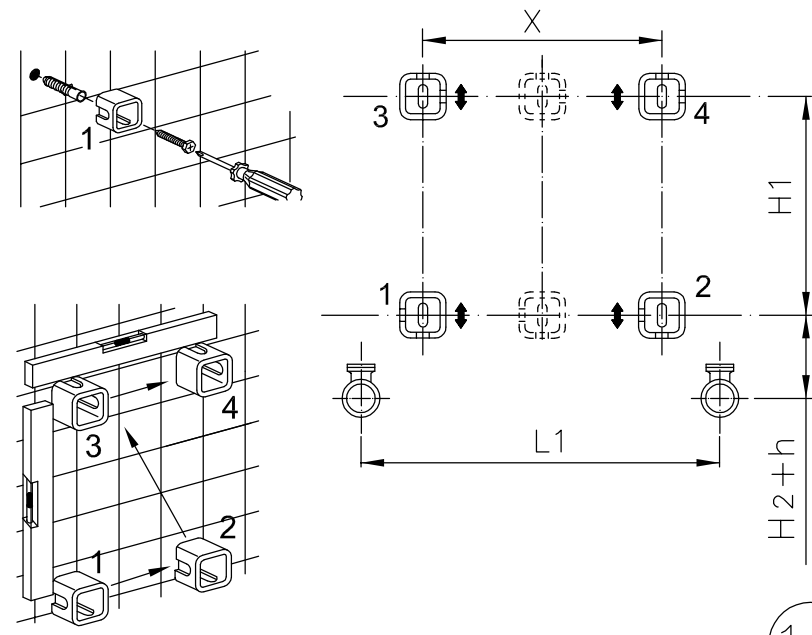


11

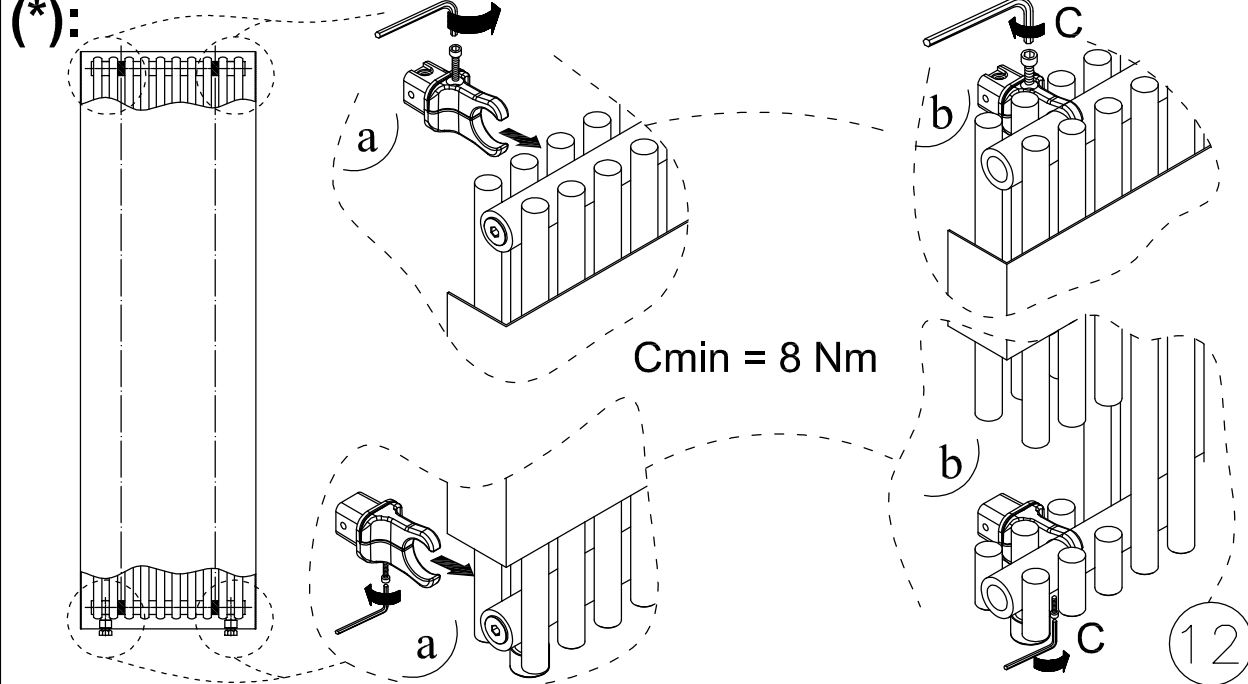


12

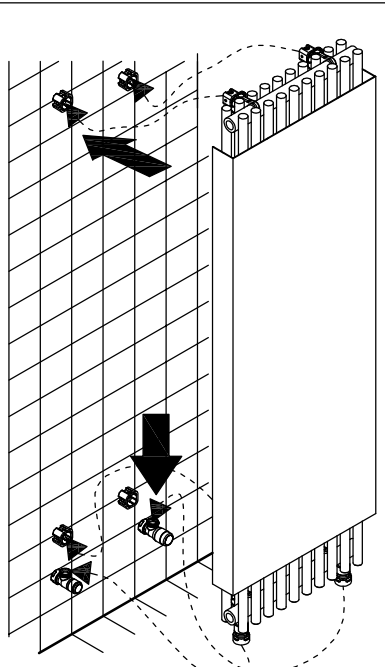


13

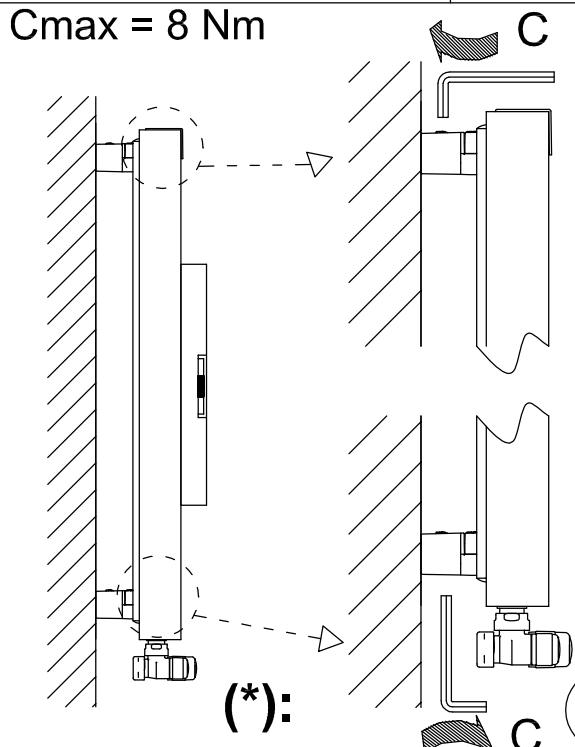

14

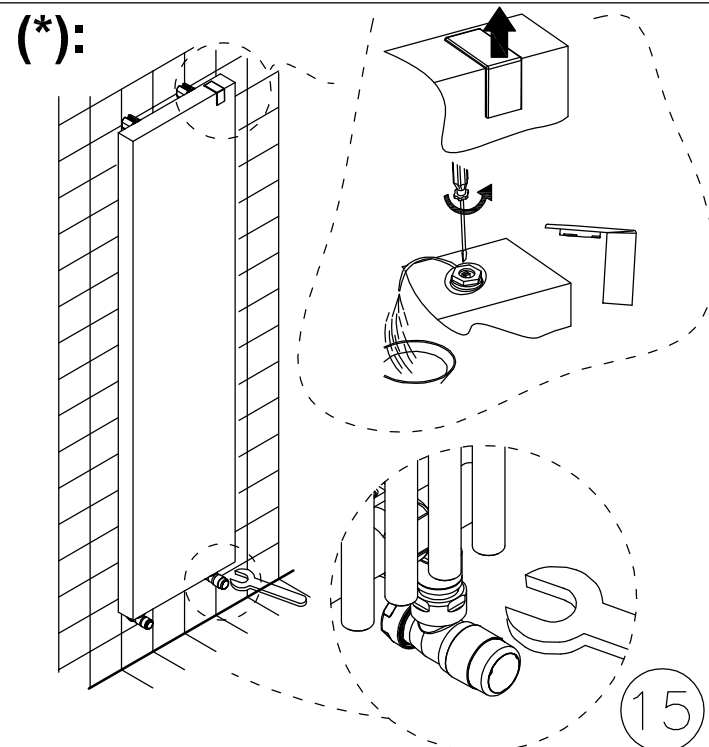

15

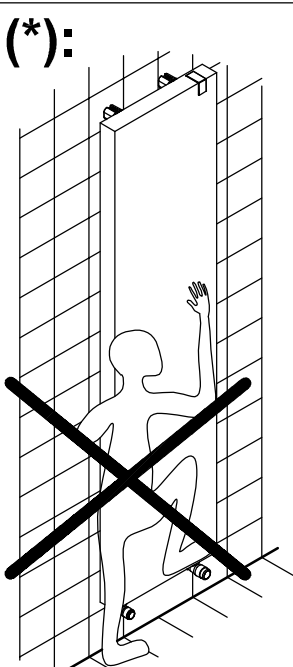

16

COMMISSION

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer’s guarantee.

TECHNICAL SPECIFICATIONS

Materials	Mild Steel.
Connections	½ flow and return.
Test pressure	6 Bar
Testing authority	EN 442
Maximum operating pressure	4 Bar
Maximum working temperature	95°C
Packaging	Wrapped in polyethylene with cardboard box.
PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system.	

TERMS & CONDITIONS

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage.

The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

GUARANTEES & LIABILITIES

This product is guaranteed for 10 years . The guarantee is subject to the product being installed in accordance with British and or European standards as well as these fitting instructions. The guarantee in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU

A brand of **IRSAP** , Italy’s leading manufacturer of design led radiators.

If you have any questions please contact us on 01342 302250
www.theradiatorcompany.co.uk