


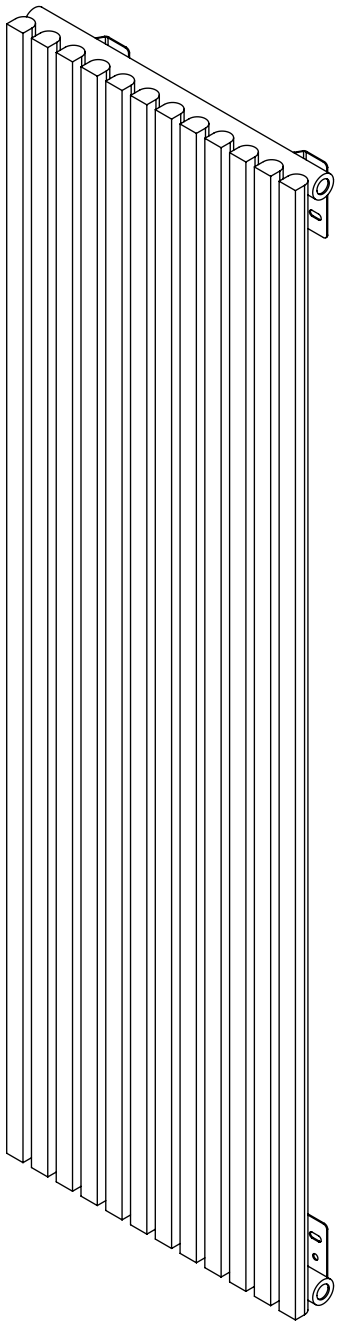
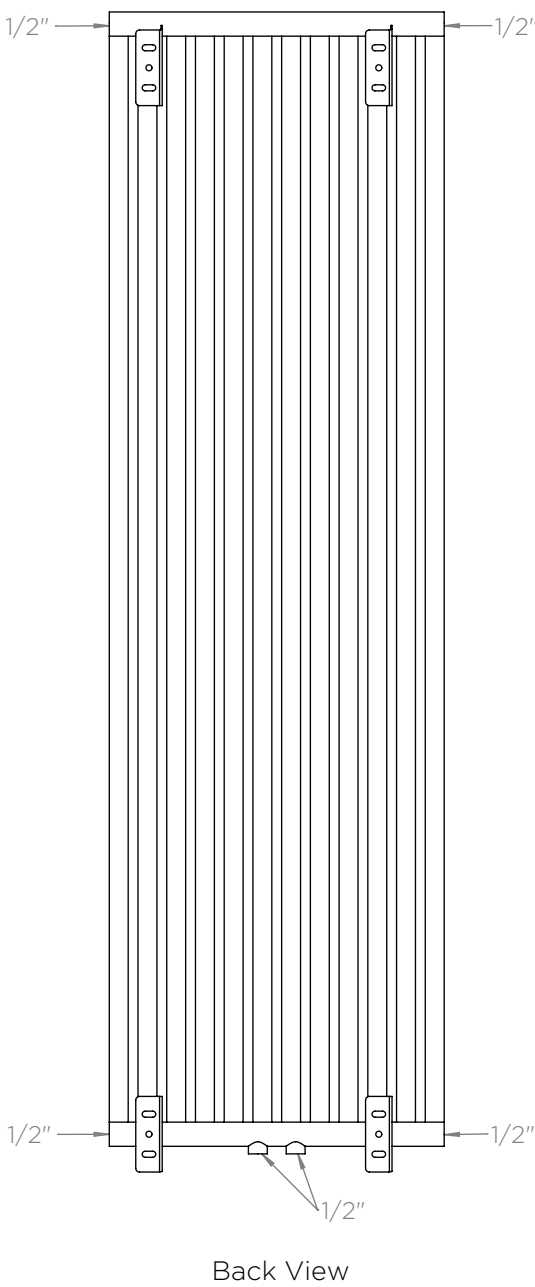
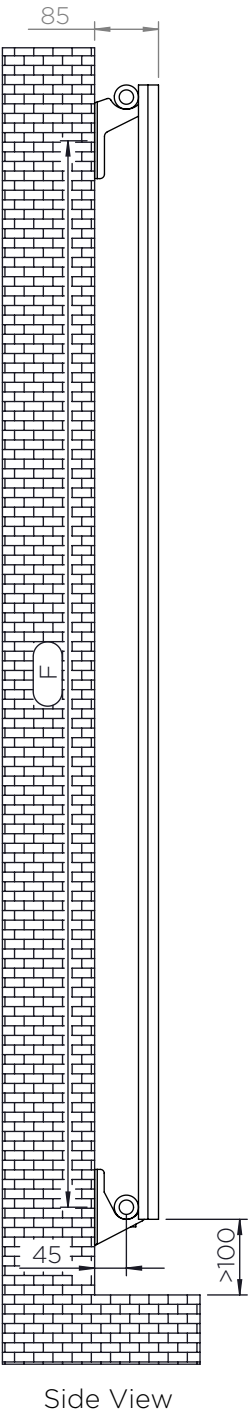


ALL MEASUREMENTS ARE IN MILLIMETRES MANUFACTURED FROM MILD STEEL


CHROME

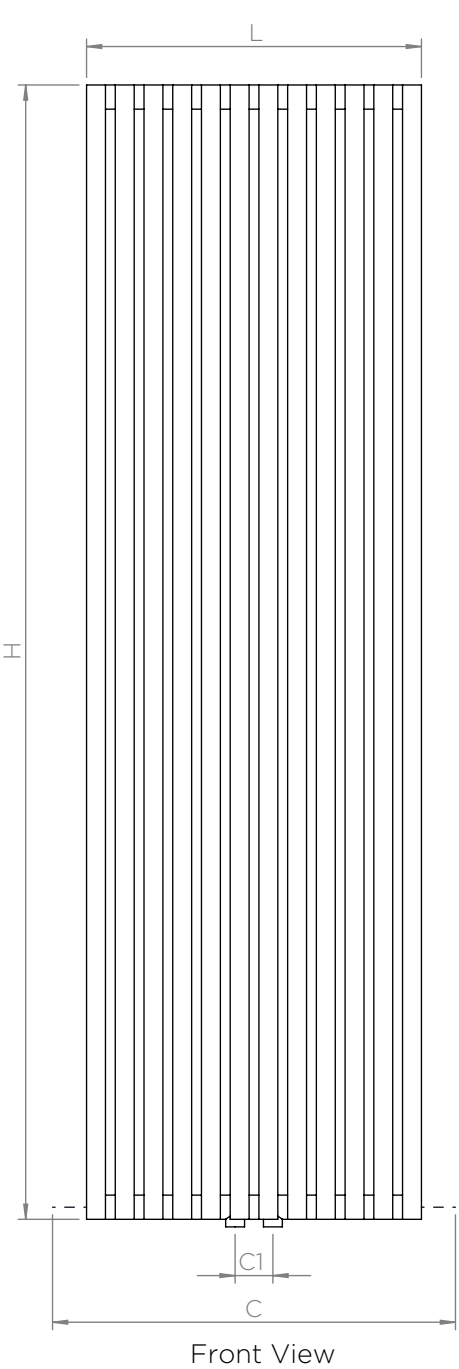

When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

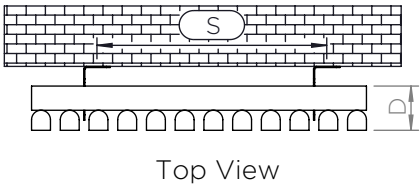

Installation Accessories:

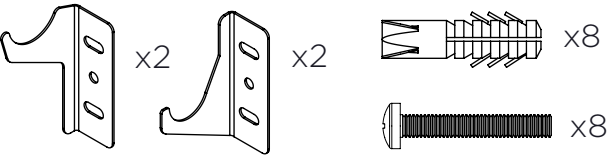

All Dimension are in mm
Max.Working Pressure = 10 Bar
Max.Working Temperature=95° C
Inlet / Outlet : 1/2" BSP
Fuel: E/H/D

PRODUCT CODE	HEIGHT (H) mm	LENGTH (L) mm	DEPTH (D) mm	PIPE CENTRES (C1-C) mm	BRACKET CENTRES	
					F mm	S mm
KS1510	1500	367	58	50-457	1410	230
KS1512	1500	443	58	50-533	1410	305
KS1810	1800	367	58	50-457	1710	230
KS1816	1800	595	58	50-685	1710	455