


Zehnder Roda Spa Electric

always the
best climate

zehnder

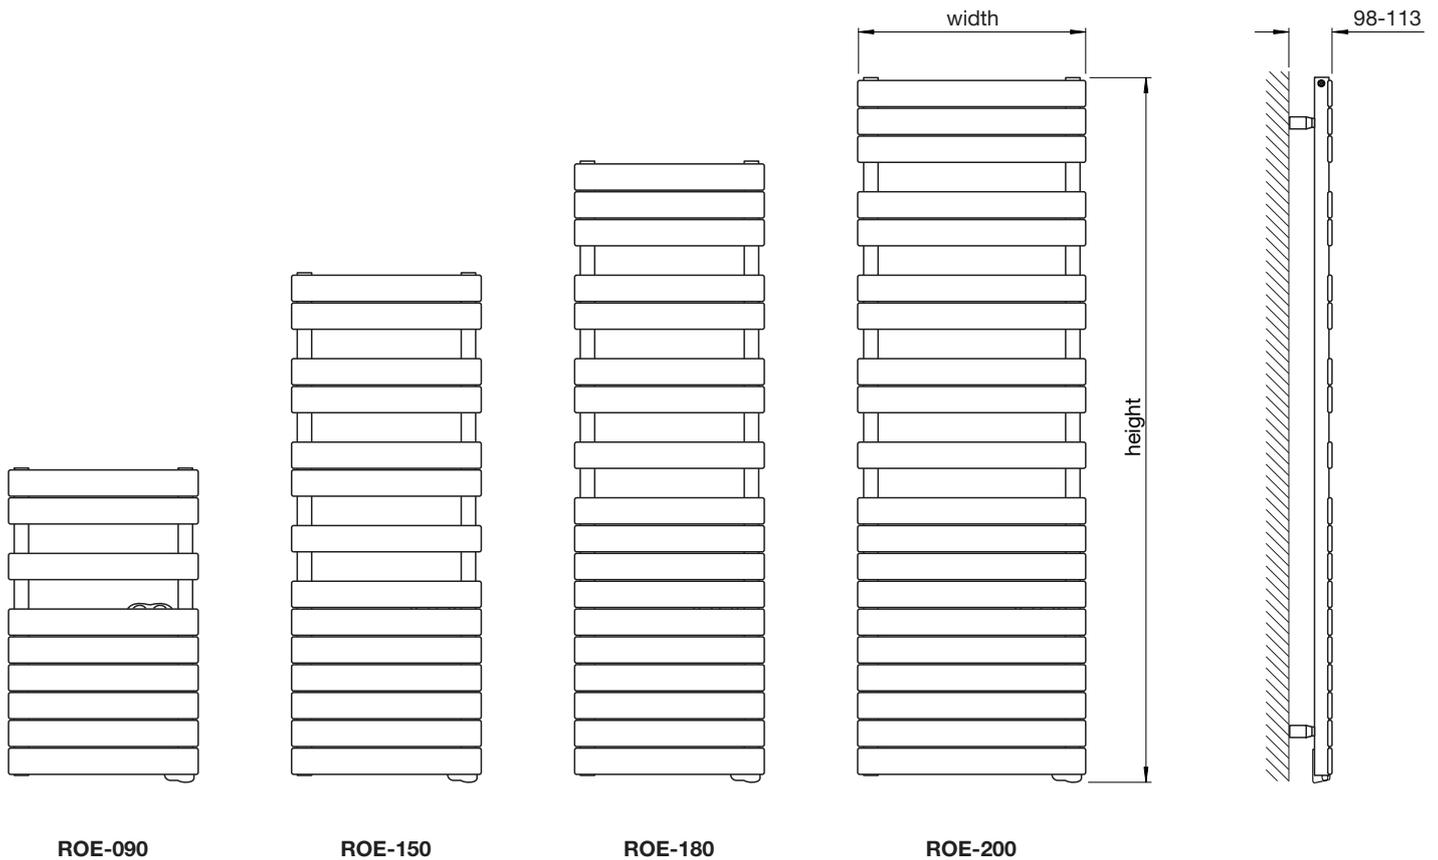

All dimensions shown are in millimetres

All steel construction: **70mm x 11mm horizontal tubes**
dia 38mm vertical tubes

Connections: **1.2m long flying lead (2 core)**

Model	Height ± 2mm	Width ± 2mm	Number of Sections	Output Watts	Weight kg
ROE-090-050/GF	835	500	9	500	15.1
ROE-150-050/GF	1353	500	14	750	22.3
ROE-180-050/GF	1649	500	18	1000	27.5
ROE-200-060/GF	1871	600	20	1250	34.7
ROE-200-080/GF	1871	800	20	1500	44.7

Issue 1.0



Zehnder Group UK Ltd

Concept House
Watchmoor Point
Camberley
Surrey GU15 3AD

Tel: 01276 605800
Fax: 01276 24058
retailsales@zehnder.co.uk
www.zehnder.co.uk

Registered in England: 2296696

Tools & Material Required

Tape measure
Electric drill
Masonry drill bit - 8mm diameter
Spirit level
Stepladder (for taller radiators)

Key	Component	Qty
A	Wall Plug	4
B	Bracket	4
C	Screw - 6mm dia x 50mm	4
D	Washer	4
E	Grub Screw	4
F	Allen Key	1

Assembly Instructions

Accurately mark out bracket holes on wall using spirit level.

Drill four holes & insert wall plugs (A).

Attach brackets (B) to wall with screws (C) & washers (D).

Slide post on radiator into bracket (B) and secure in position by tightening grub screw (E) with allen key (F).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

