

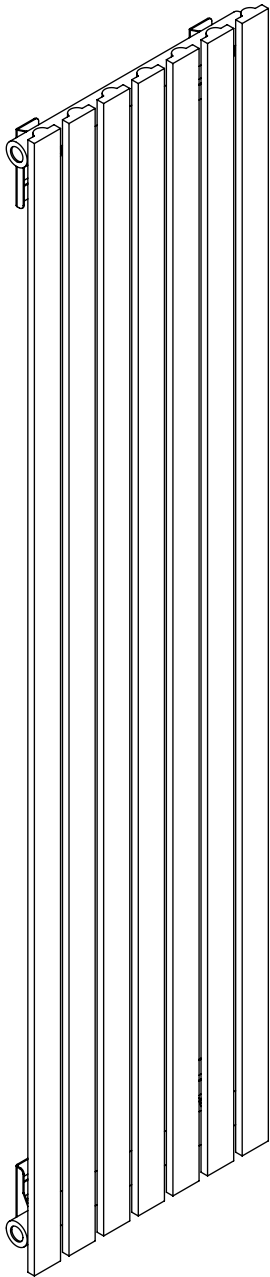
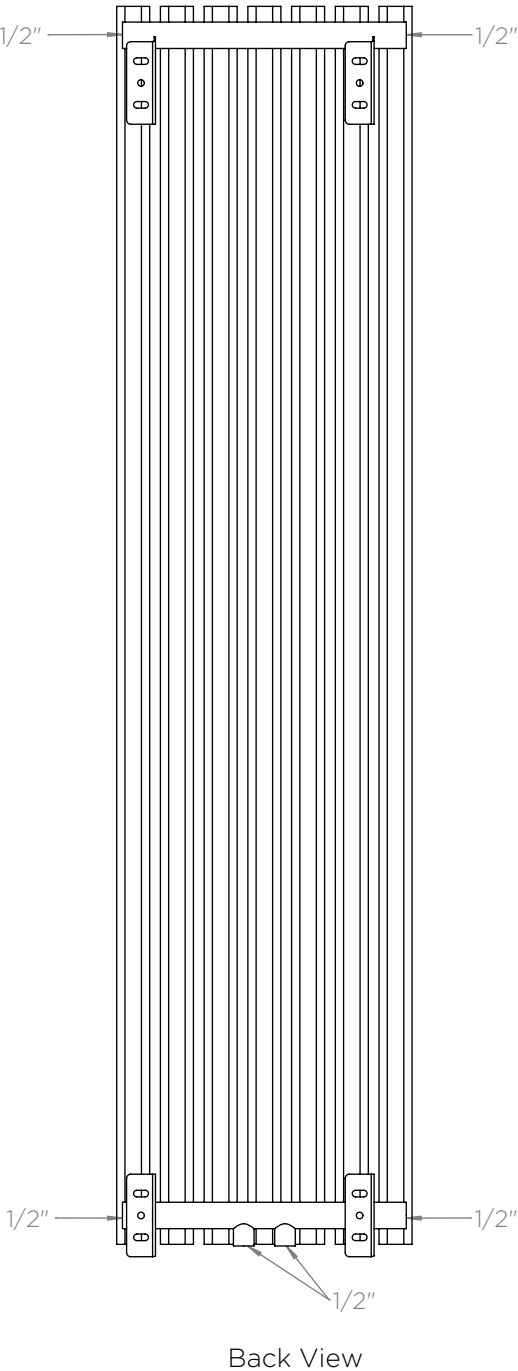
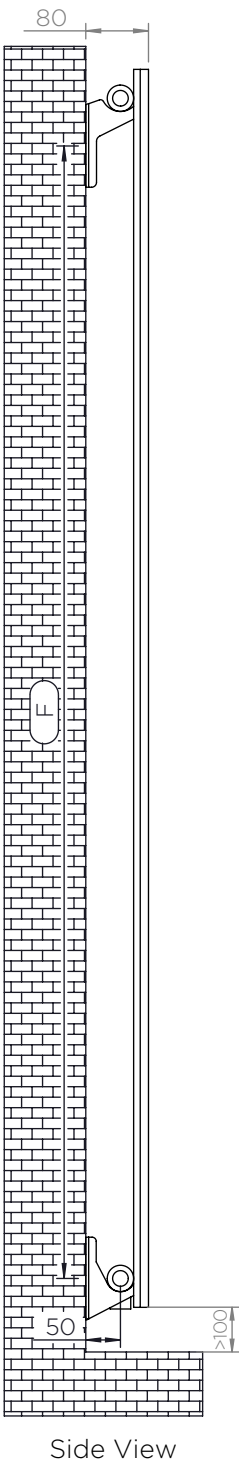



ALL MEASUREMENTS ARE IN MILLIMETRES MANUFACTURED FROM MILD STEEL

SINGLE

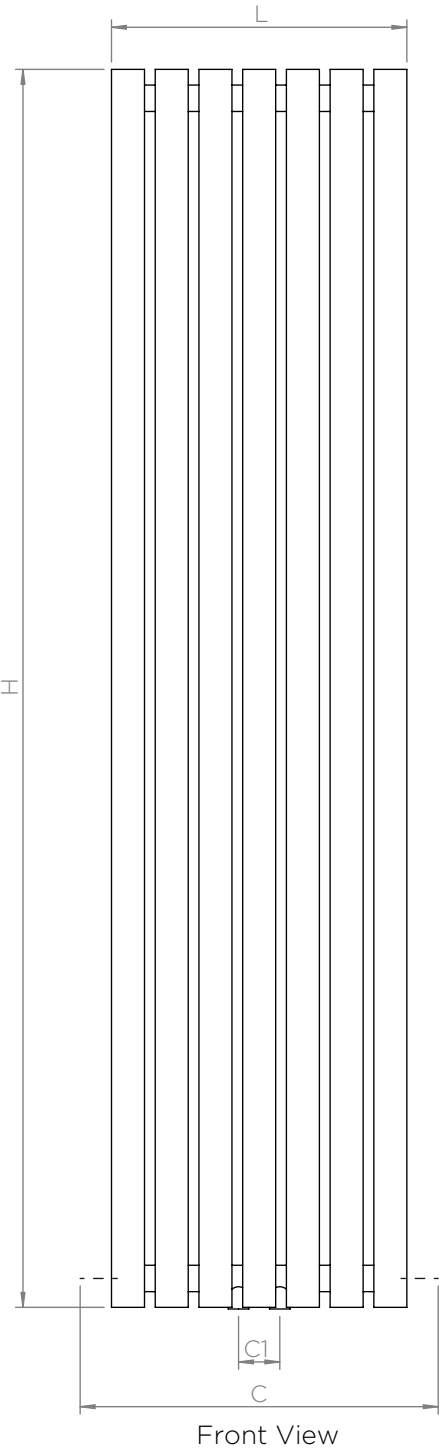


When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

All Dimensions are in mm
Max.Working Pressure: 6 Bar
Max.Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel Type: E/H/D

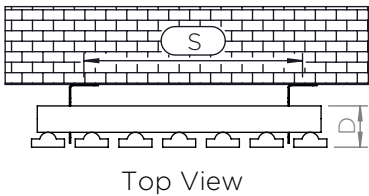





Installation Accessories:

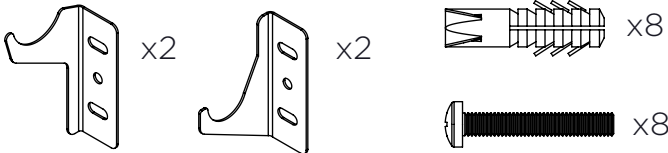

PRODUCT CODE	HEIGHT (H)	LENGTH (L)	DEPTH (D)	PIPE CENTRES (C1-C)	BRACKET CENTRES	
	mm	mm	mm	mm	F mm	S mm
LS1505	1500	268	48	50-358	1460	159
LS1507	1500	374	48	50-464	1460	265
LS1509	1500	480	48	50-570	1460	371
LS1805	1800	268	48	50-358	1760	159
LS1807	1800	374	48	50-464	1760	265
LS1809	1800	480	48	50-570	1760	371
LS2005	2000	268	48	50-358	1960	159
LS2007	2000	374	48	50-464	1960	265
LS2009	2000	480	48	50-570	1960	371

ALL MEASUREMENTS ARE IN MILLIMETRES MANUFACTURED FROM MILD STEEL

DOUBLE

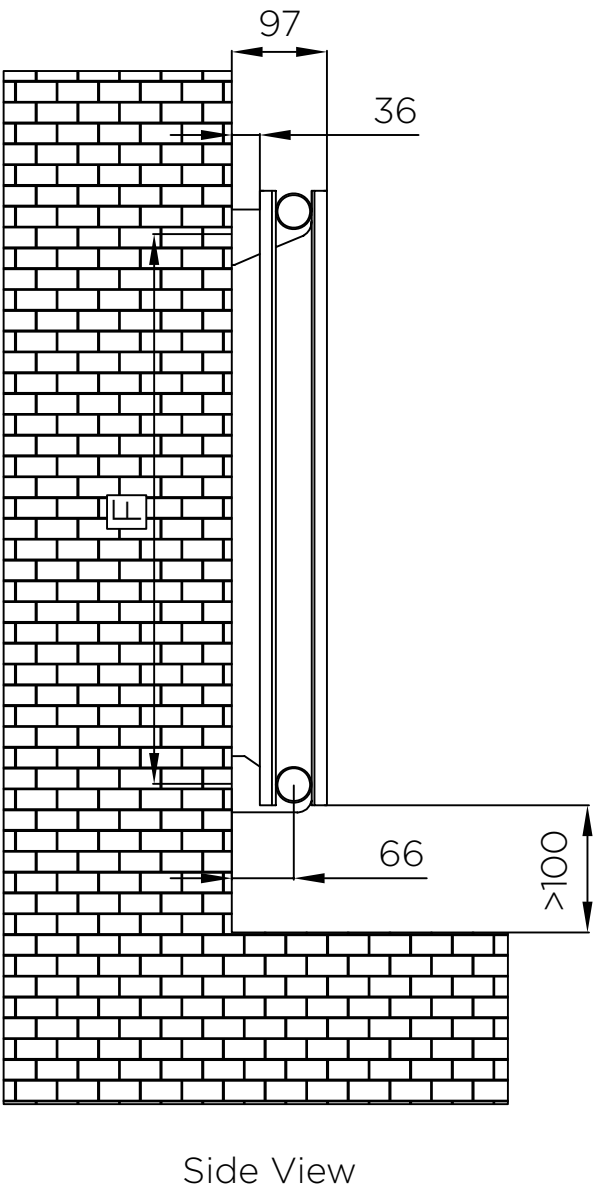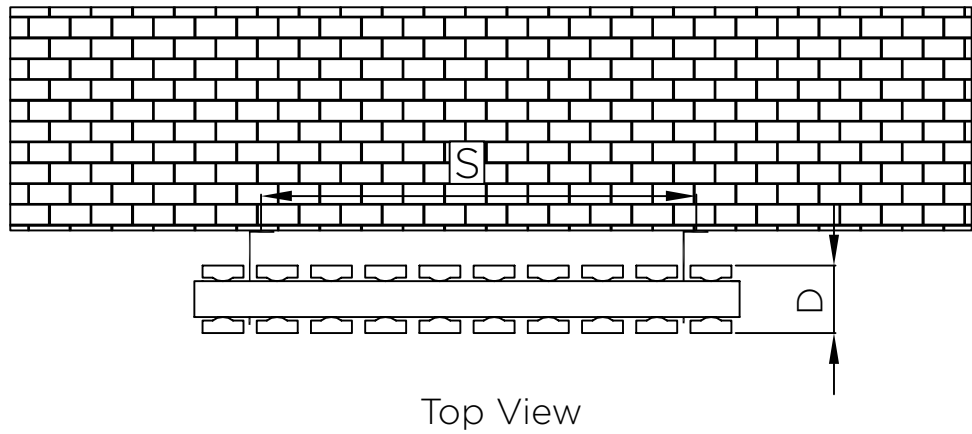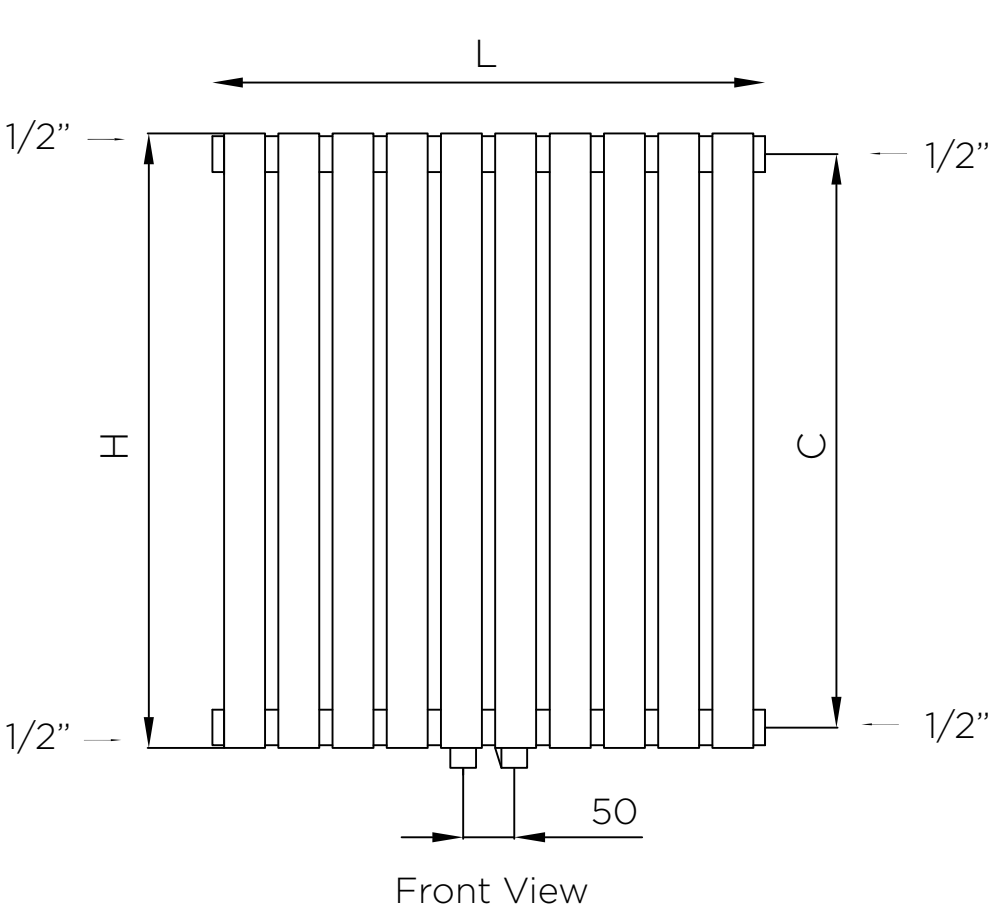

When mounting vertically, please observe that the collector fitted with a flow diverter is mounted at the bottom. This can be verified by visually checking or by referring to the installation diagram

All Dimensions are in mm
Max.Working Pressure: 6 Bar
Max.Working Temperature: 95° C
Inlet / Outlet : 1/2" BSP
Fuel Type: E/H/D

PRODUCT CODE	HEIGHT (H)	LENGTH (L)	DEPTH (D)	COLLECTOR TUBE CENTRES (C)	BRACKET CENTRES	
	F	S				
	mm	mm	mm	mm	mm	mm
LD1507	1500	374	61	50-464	1431	265
LD1805	1800	268	61	50-358	1731	159
LD1807	1800	374	61	50-464	1731	265
LD1809	1800	480	61	50-570	1731	371
LD1811	1800	586	61	50-676	1731	477
LD2005	2000	268	61	50-358	1931	159
LD2009	2000	480	61	50-570	1931	371