



# GIULY® SL

design **Mariano Moroni**

**EUROPEAN  
WARRANTY**

**MATERIAL:**

Super slim heating body in painted carbon steel.

**FIXING KIT:**

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice.

The kit is certified from TÜV in compliance with VDI 6036-class 4.

**VALVE KIT INCLUDES:**

Valves

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16)

**PACKAGING:**

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

**PAINTING PROCESS:**

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

**COLOURS:**

Radiator and accessories: standard white colour R01.

## PRODUCT CERTIFICATES



Pression maximale de service: 5 bar


Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz

## AWARD



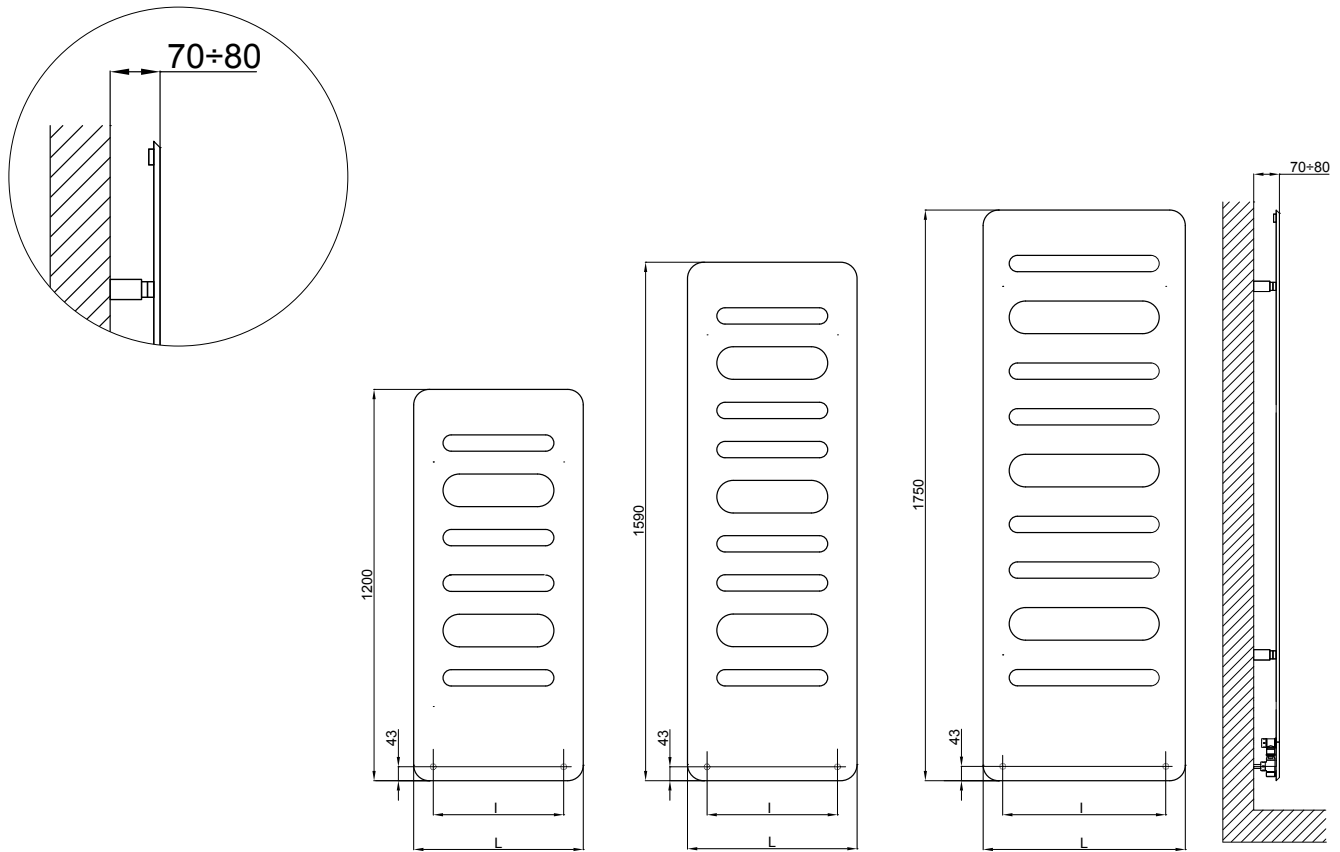

## GIULY® SL

Art. Nr.	Height		Width	Pipe Centres	Dry Weight	Surface	Water Content	Thermal output Watt		Exponent n
	H [mm]	L [mm]						$\Delta t = 50^{\circ}\text{C}$	$\Delta t = 30^{\circ}\text{C}$	
3540806100222	<b>1200</b>	520	400	16	0,90	0,90	523	275	1,2610	
3540806100223	<b>1590</b>	520	400	20	1,16	1,16	718	379	1,2510	
3540806100225	<b>1750</b>	620	500	26	1,50	1,50	903	468	1,2850	

Art. Nr. are referred to colour WHITE R01 version.

Includes valves.

For output at different  $\Delta t$  than  $50^{\circ}\text{C}$ , please refer to the following formula: desired output = output at  $\Delta t 50^{\circ}\text{C}$  x (desired  $\Delta t/50$ )<sup>n</sup>