


APOLLO magenta curve horizontal technical specification

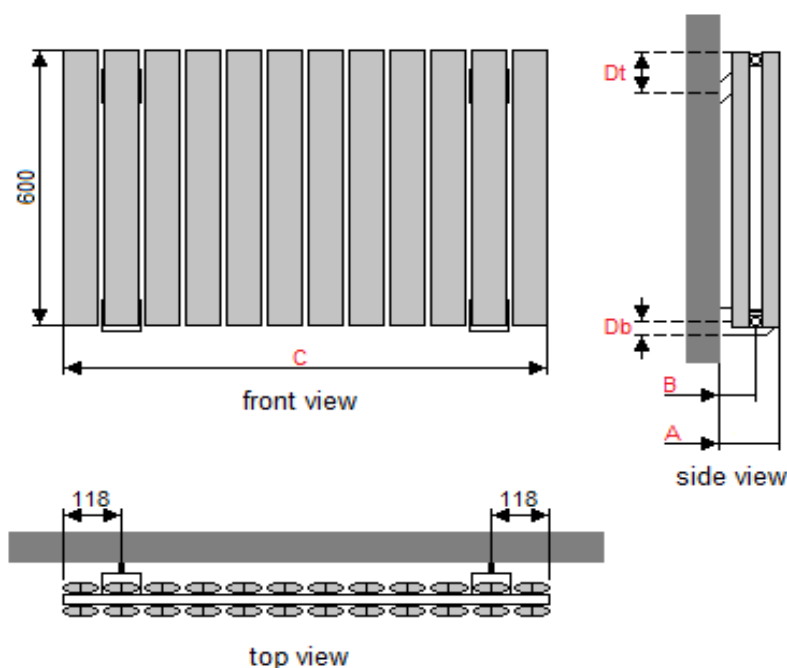

MAGENTA CURVE HORIZONTAL DIMENSIONS (mm)							
MODEL HEIGHT							600
Width of radiator			475	635	795	955	1195 1435
No. of sections			6	8	10	12	15 18
Section depth x width			75 x 80				
Back wall to front of rad		(A)	88				
Back wall to pipe centres	Side entry	(B)	50				
	Bottom entry		N/A				
Tapping centres	Side entry	(C)	475	635	795	955	1195 1435
	Bottom entry		N/A				
Bracket positions	Top	(Dt)	60				
	Bottom	(Db)	16				
Tappings			1/2"				

MAGENTA CURVE HORIZONTAL WEIGHTS AND VOLUMES (per radiator)							
Model Width (mm)			475	635	795	955	1195 1435
Dry Weight (A) Kg			6.76	9.01	11.26	13.51	16.89 20.27
Water content (B) Litres			0.96	1.28	1.60	1.92	2.40 2.88
Working weight (A+B) Kg			7.72	10.29	12.86	15.43	19.29 23.15
Outputs: Watts $\Delta T=50k$			648	864	1080	1296	1620 1944

The thermal outputs expressed at $\Delta T=50k$ comply with European regulation EN 442-2

ADDITIONAL INFORMATION	
Material	Aluminium Alloy 6063 T5
Alloy thickness	1.2 - 2.0mm
Maximum working pressure	6 bar
Mechanical strength test pressure	10.14 bar/1014 kPa
Maximum working temperature	90°C

TEMPERATURE FACTORS FOR DIFFERENCES BETWEEN MEAN WATER TEMPERATURE AND ROOM TEMPERATURE IN °C AND °F OTHER THAN 50°C (90°F)			
5°C	0.050		
10°C	0.123	10°F	0.057
15°C	0.209	20°F	0.142
20°C	0.304	30°F	0.240
25°C	0.406	40°F	0.348
30°C	0.515	50°F	0.466
35°C	0.629	60°F	0.590
40°C	0.748	70°F	0.721
45°C	0.872	80°F	0.858
50°C	1.000	90°F	1.000
55°C	1.132	100°F	1.147
60°C	1.267	110°F	1.298
65°C	1.406	120°F	1.454
70°C	1.549	130°F	1.613
75°C	1.694	140°F	1.776

TO APPLY THE FACTORS SHOWN IN THE TABLE TO OUR QUOTED OUTPUTS
MULTIPLY THE QUOTED OUTPUT BY THE CHOSEN OPERATING FACTOR TO GIVE THE OUTPUT