


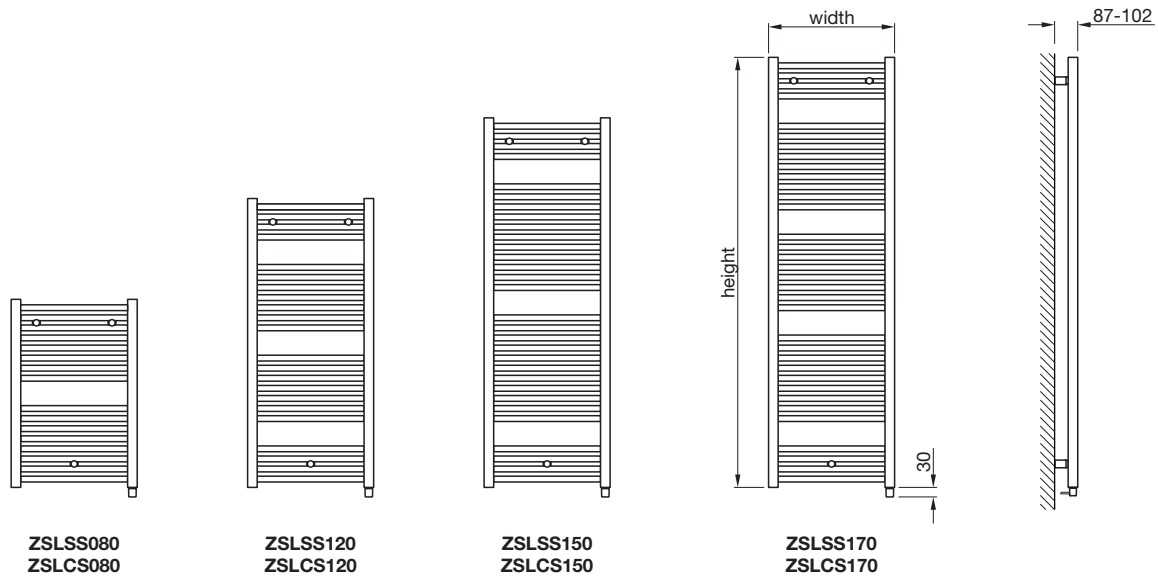

All dimensions shown are in millimetres

All steel construction: **dia 23mm horizontal tubes**
dia 38mm headers

Connections: **1.2m long flying lead (2 core)**

* does not include immersion heater

Model	Height* ± 2mm	Width ± 2mm	Finish	Output Watts	Weight kg
ZSLSS080045EAK	748	450	painted	200	9.3
ZSLSS080050EAK	748	500	painted	400	10.0
ZSLSS080060EAK	748	600	painted	400	11.5
ZSLSS120050EAK	1148	500	painted	400	14.1
ZSLSS120060EAK	1148	600	painted	500	16.3
ZSLSS150050EAK	1466	500	painted	500	18.7
ZSLSS150060EAK	1466	600	painted	600	21.4
ZSLSS170050EAK	1708	500	painted	600	21.3
ZSLSS170060EAK	1708	600	painted	600	24.6
ZSLCS080050EAK	748	500	chrome	200	10.0
ZSLCS080060EAK	748	600	chrome	200	11.5
ZSLCS120050EAK	1148	500	chrome	400	14.1
ZSLCS120060EAK	1148	600	chrome	400	16.3
ZSLCS150050EAK	1466	500	chrome	400	18.7
ZSLCS150060EAK	1466	600	chrome	400	21.4
ZSLCS170050EAK	1708	500	chrome	400	21.3
ZSLCS170060EAK	1708	600	chrome	500	24.6

Issue 1.0



Tools & Material Required

Tape measure
Spanner - 13mm & 14mm
Screwdriver - crosshead
Electric drill
Masonry drill bit
Spirit level
Stepladder (for taller radiators)

Key	Component	Qty
A	Clamp - Outer	3
B	Clamp - Inner	3
C	Boss	3
D	Wall Plug	3
E	Bracket	3
F	Screw - Hex Head, 6mm dia x 60mm	3
G	Washer	3
H	Grub Screw	3
I	Allen Key	1

Assembly Instructions

Loosely assemble outer clamps (A), inner clamps (B) & bosses (C) on radiator.

Accurately mark out bracket holes on wall using spirit level.

Drill three holes to a minimum depth of 65mm & insert wall plugs (D). Screw brackets (E) into wall plugs (D) with 6mm diameter x 70mm screws (F) & washers (G).

Offer radiator up to wall and slide bosses (C) into brackets (E).

Secure in position by tightening grub screw (H) with Allen key (I).

Tighten outer clamps (A).

Electric radiators should be fitted only by a qualified electrician and must be earthed and connected to a cable outlet in the bathroom in accordance with I.E.E. wiring regulations. The electrical connection should be made to a '5 amp fused fixed spur' located outside the bathroom.

Note: for maintenance purposes, cable outlets must remain accessible and cables must not be buried directly into walls.

