


# MILTON

## Towel Rail



- 50mm x 10mm Cross Tubes
- 30mm x 30mm Square Collectors
- +Valves prices include Chrome DRAKE Valves\*
- White RAL 9016 as standard delivered in 48-72 hours
- Optional next day delivery available in White RAL 9016 (page 2)
- 25 RAL colours and 8 special finishes delivered in up to 15 working days (page 11)

### Pipe Centres and Technical Drawings

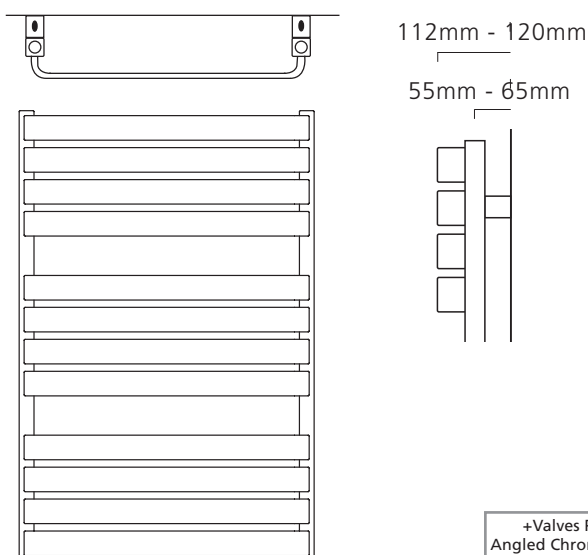

Pipe centres left to right = Width less 30mm  
 Pipe centres from wall = 57mm - 65mm  
 Depth from wall = 112mm - 120mm



◆ 1110mm x 600mm in RAL 9005 shown with DRAKE Valves.

### Sizes and Prices

Dimensions (mm)		Cross Tubes	Output $\Delta t$ 50°C		Product Code
Height	Width		Watts	Btu's	
655	500	8	325	1109	MILT655008
	600	8	383	1307	MILT656008
785	500	10	400	1365	MILT785010
	600	10	470	1604	MILT786010
915	500	12	475	1621	MILT915012
	600	12	555	1894	MILT916012
1110	500	14	553	1887	MILT115014
	600	14	650	2218	MILT116014 ◆

The MILTON Towel Rail is suitable for use as dual fuel, please see pages 78-79 for available Electric Elements.

## MILTON Fitting Instructions


### Towel Rail

Please read these instructions and terms and conditions carefully prior to installation. Failure to do so may invalidate the warranty.




## Drawings


Drawing 1 - Fixed Bracket



Drawing 2 - Bracket Positions

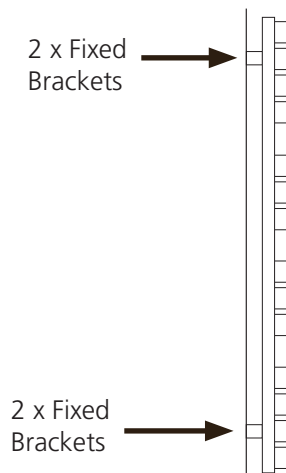

Drawing 3 - Bracket Position Measurements

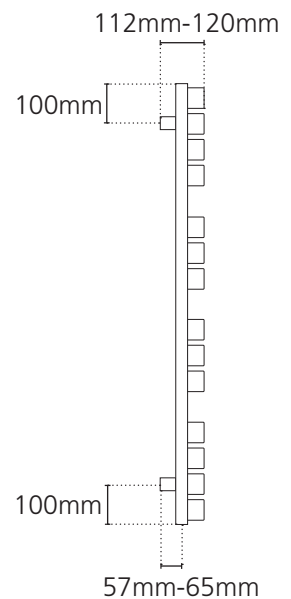

## Pipe Centres

Pipe centres left to right	=	width less 30mm
Pipe centres from wall	=	57mm - 65mm
Depth from wall	=	112mm - 120mm

# 1. Unpack & Inspect

This product should have reached you in perfect condition. Please carefully unpack and inspect this radiator and all fittings. Your point of purchase must be notified of any shortages or damage within 28 days of delivery.

For further information please see terms and conditions at the bottom of the page.

# 3. Fix Brackets

Brackets should be fixed using suitable drill bit, screws and plugs.

Mark and fix the 2 top brackets checking they are level, see drawing 3 for bracket measurements. Hang radiator in position and mark the location of the 2 bottom brackets and fix in place.

### PLEASE NOTE:

It is essential that all brackets are level and square prior to hanging the radiator to ensure a vertical alignment for connecting the pipe work.

# 2. Contents

### You should have:

- 1 Towel Rail
- 4 Wall Bracket Sleeves
- 1 Manual Airvent
- 1 Blanking Plug

### You will need:

- Tape measure
- Electric drill and bits
- Spirit level
- Suitable Fittings

# 4. Hang & Commission Radiator

With the brackets firmly fixed and level, the radiator is lowered directly onto the brackets.

When commissioning your radiator on an indirect/closed system we recommend using a suitable quality and quantity of mixed metal inhibitor to protect against scale & corrosion.

**Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer's guarantee.**

---

# Technical Specifications

<b>Materials</b>	Steel
<b>Connections</b>	½" flow and return.
<b>Test pressure</b>	13 Bar
<b>Testing authority</b>	EN442
<b>Maximum operating pressure</b>	10 Bar
<b>Maximum working temperature</b>	95°C
<b>Packaging</b>	Wrapped in polythene & boxed.

**PLEASE NOTE:** Systems using micro bore pipe work must have adequate pressure and flow rates for the number and style of radiators on the system.

# Guarantees & Liabilities

This product is guaranteed for 5 years. As we are not the manufacturers of this product we will take all reasonable endeavours to make over to you the benefit of any warranty or guarantee given by the manufacturer.

The guarantees in all cases are subject to the products being installed in accordance with British and or European standards as well as these fitting instructions. The guarantees in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to us.

# Terms & Conditions

All products must be inspected once removed from the packaging and your point of purchase notified within 28 days of delivery of any scratches, blemishes or other damage. Your point of purchase will then agree appropriate action. Imperfect radiators should therefore not be fitted and we will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If we are not notified within 28 days of the date on the signed delivery note then it will be deemed that we have fully complied with our obligations and claims will not be considered. Failure to comply with any of the above may invalidate any claims. We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation, we cannot accept responsibility for items damaged after delivery.

For full details of our Terms and Conditions please visit [www.supplies4heat.co.uk](http://www.supplies4heat.co.uk) or call us on 01342 306880.