

Sitar



Double horizontal 504mm x 1220mm in White RAL 9016 with White Ideal TRV's.



Single horizontal

Double vertical 1820mm x 402mm shown in RAL 9007 with Nickel Ideal TRV's.

Sitar single horizontal

shown on pages 50-51

High quality Italian design & manufacture.
Steel; 23mm round tubes
UKCA approved & certified to BS EN442

White RAL 9016 as standard, 188 RAL colours plus 30 Special Finishes
Please call **01342 302250** for a RAL or Special Finish chart
Colour Co-ordination Service available on stock sizes see pages 6-7 for full details.

Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks

Pipe centres left to right	Pipe centres from wall	Depth from wall
width - 50mm	55mm	90mm

Stock options White RAL 9016 - Single Horizontal

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
402	920	SITASH4092I2	515	1757
	1220	SITASH40I2I2	683	2330
	1520	SITASH40I5I2	851	2904
504	520	SITASH5052I5	361	1232
	650	SITASH5065I5	451	1539
	700	SITASH5070I5	486	1658
	920	SITASH5092I5	639	2180
	1220	SITASH50I2I5	848	2893
538	1520	SITASH50I5I5	1056	3603
	920	SITASH5392I6	681	2324
	1220	SITASH53I2I6	903	3081
606	1520	SITASH53I5I6	1124	3835
	650	SITASH6065I8	537	1832
	700	SITASH6070I8	578	1972
	920	SITASH6092I8	760	2593
	1220	SITASH60I2I8	1009	3443
	1520	SITASH60I5I8	1257	4289

Made to order options - Single Horizontal



Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
300	520	SITASH3052O9	218	744
	650	SITASH3065O9	272	928
	700	SITASH3070O9	293	1000
	920	SITASH3092O9	386	1317
	1220	SITASH30I2O9	512	1747
	1520	SITASH30I5O9	638	2177
	1820	SITASH30I8O9	764	2607
402	2020	SITASH3020O9	848	2893
	520	SITASH4052I2	291	993
	650	SITASH4065I2	363	1239
	700	SITASH4070I2	391	1334
504	1820	SITASH40I8I2	1018	3473
	2020	SITASH4020I2	1130	3856
	1820	SITASH50I8I5	1265	4316
	2020	SITASH5020I5	1404	4790



SAVE MONEY! WHEN YOU BUY OUR **IDEAL TRV KIT** WITH ANY DESIGNER ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome

Single

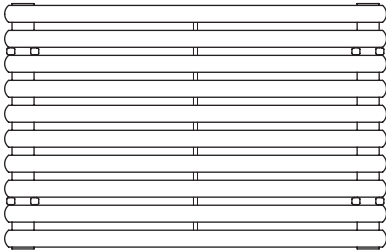

Sitar double horizontal

shown on pages 50-51

High quality Italian design & manufacture.
Steel; 23mm round tubes
UKCA approved & certified to BS EN442

White RAL 9016 as standard, 188 RAL colours plus 30 Special Finishes
Please call **01342 302250** for a RAL or Special Finish chart
Colour Co-ordination Service available on stock sizes see pages 6-7 for full details.

Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks

Pipe centres left to right	Pipe centres from wall	Depth from wall
width + valves	79mm to 89mm	114mm to 124mm

Stock options White RAL 9016 - Double Horizontal

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
402	920	SITADH4092I2	782	2668
	1220	SITADH40I2I2	1037	3538
	1520	SITADH40I5I2	1292	4408
	1820	SITADH40I8I2	1547	5278
504	520	SITADH5052I5	527	1798
	650	SITADH5065I5	658	2245
	700	SITADH5070I5	709	2419
	920	SITADH5092I5	937	3197
	1220	SITADH50I2I5	1235	4214
	1520	SITADH50I5I5	1540	5254
	1820	SITADH50I8I5	1844	6292
538	920	SITADH5392I6	955	3258
	1220	SITADH53I2I6	1266	4320
	1520	SITADH53I5I6	1577	5381
606	650	SITADH6065I8	732	2498
	700	SITADH6070I8	789	2692
	920	SITADH6092I8	1037	3538
	1220	SITADH60I2I8	1375	4692
	1520	SITADH60I5I8	1713	5845
	1820	SITADH60I8I8	2051	6998

Made to order options - Double Horizontal

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
300	520	SITADH3052O9	378	1290
	650	SITADH3065O9	473	1614
	700	SITADH3070O9	509	1737
	920	SITADH3092O9	669	2283
	1220	SITADH30I2O9	887	3026
	1520	SITADH30I5O9	1105	3770
	1820	SITADH30I8O9	1323	4514
	2020	SITADH3020O9	1468	5009
402	520	SITADH4052I2	442	1508
	650	SITADH4065I2	552	1883
	700	SITADH4070I2	595	2030
	2020	SITADH4020I2	1717	5858
504	2020	SITADH5020I5	2046	6981
606	2020	SITADH6020I8	2276	7766





SAVE MONEY! WHEN YOU BUY OUR **IDEAL TRV KIT** WITH ANY DESIGNER ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome

Double

114-124
79-89

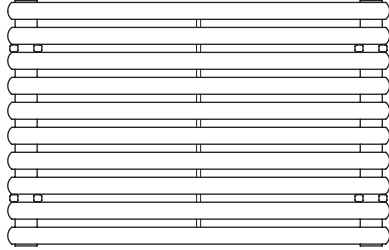

*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOVIW (white), PROMOVIC (chrome).

*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOVIW (white), PROMOVIC (chrome).

Sitar single vertical

shown on pages 50-51



High quality Italian design & manufacture.
Steel; 23mm round tubes
UKCA approved & certified to BS EN442



SAVE MONEY! WHEN YOU BUY OUR
IDEAL TRV KIT WITH ANY DESIGNER
ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome


Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks

Pipe centres left to right	Pipe centres from wall	Depth from wall
width + valves	55mm	90mm

Stock options White RAL 9016 - Single Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
650	402	SITASV6540I2	384	1310
	504	SITASV6550I5	480	1638
1220	402	SITASVI240I2	660	2252
	504	SITASVI250I5	825	2815
	606	SITASVI260I8	990	3378
1520	232	SITASVI52307	469	1600
	300	SITASVI53009	603	2057
	402	SITASVI540I2	804	2743
	504	SITASVI550I5	1005	3429
	606	SITASVI560I8	1206	4115
1820	232	SITASVI82307	546	1863
	300	SITASVI83009	702	2395
	402	SITASVI840I2	936	3194
	504	SITASVI850I5	1170	3992
	606	SITASVI860I8	1404	4790
2020	708	SITASVI8702I	1638	5589
	402	SITASV2040I2	1032	352I
	504	SITASV2050I5	1290	440I
	606	SITASV2060I8	1548	5282

Single

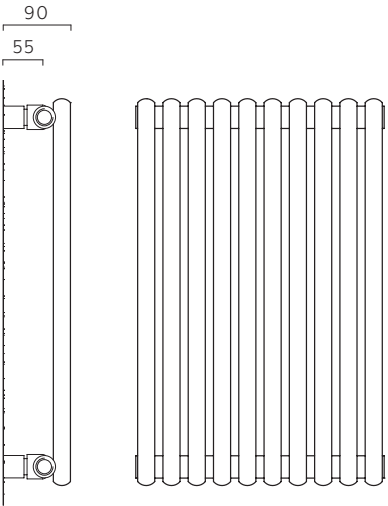

Underneath Connections
B2CONN
Underneath Connections are made to order only, stock lines are BOE.
Underneath Connections pipe centres = width - 75mm

Sitar double vertical

shown on pages 50-51



High quality Italian design & manufacture.
Steel; 23mm round tubes
UKCA approved & certified to BS EN442



SAVE MONEY! WHEN YOU BUY OUR
IDEAL TRV KIT WITH ANY DESIGNER
ORDER*QUOTE **PROMOVI** AT TIME OF ORDER

Available in White or Chrome


Stock White RAL 9016: 48-72 Hours
Made to Order sizes & colours: Up to 5 weeks

Pipe centres left to right	Pipe centres from wall	Depth from wall
width + valves	79mm to 89mm	114mm to 124mm

Stock options White RAL 9016 - Double Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
650	402	SITADV6540I2	576	1965
	504	SITADV6550I5	720	2457
1220	402	SITADV1240I2	960	3276
	504	SITADV1250I5	1200	4094
	606	SITADV1260I8	1440	4913
1520	232	SITADV152307	686	234I
	300	SITADV153009	882	3009
	402	SITADV1540I2	1176	4013
	504	SITADV1550I5	1470	5016
	606	SITADV1560I8	1764	6019
1820	232	SITADV182307	819	2794
	300	SITADV183009	1053	3593
	402	SITADV1840I2	1404	4790
	504	SITADV1850I5	1755	5988
	606	SITADV1860I8	2106	7186
2020	708	SITADV18702I	2457	8383
	402	SITADV2040I2	1572	5364
	504	SITADV2050I5	1965	6705
	606	SITADV2060I8	2358	8045

Double

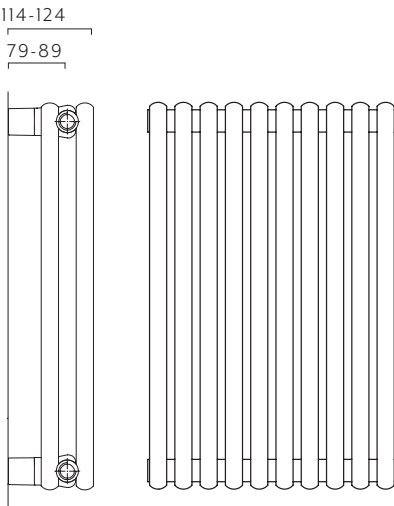

Underneath Connections
B2CONN
Underneath Connections are made to order only, stock lines are BOE.
Underneath Connections pipe centres = width - 75mm

Made to order options - Single Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
520	300	SITASV523009	234	798
	402	SITASV5240I2	312	1065
	504	SITASV5250I5	390	133I
	606	SITASV5260I8	468	1597
	708	SITASV52702I	546	1863
650	300	SITASV653009	288	983
	606	SITASV6560I8	576	1965
	708	SITASV65702I	672	2293
750	300	SITASV753009	324	1105
	402	SITASV7540I2	432	1474
	504	SITASV7550I5	540	1842
	606	SITASV7560I8	648	221I
920	708	SITASV75702I	756	2579
	232	SITASV922307	30I	1027
	300	SITASV923009	387	1320
	402	SITASV9240I2	516	176I

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
920	504	SITASV9250I5	645	220I
	606	SITASV9260I8	774	264I
	708	SITASV92702I	903	308I
	810	SITASV928I24	1032	352I
1220	232	SITASVI22307	385	1314
	300	SITASVI23009	495	1689
	708	SITASVI2702I	1155	394I
	810	SITASVI28I24	1320	4504
1520	708	SITASVI5702I	1407	480I
	810	SITASVI58I24	1608	5486
1820	810	SITASVI88I24	1872	6387
2020	232	SITASV202307	602	2054
	300	SITASV203009	774	264I
	708	SITASV20702I	1806	6162
	810	SITASV208I24	2064	7042

Made to order options - Double Vertical

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
520	300	SITADV523009	360	1228
	402	SITADV5240I2	480	1638
	504	SITADV5250I5	600	2047
	606	SITADV5260I8	720	2457
	708	SITADV52702I	840	2866
	708	SITADV52702I	840	2866
650	300	SITADV653009	432	1474
	606	SITADV6560I8	864	2948
	708	SITADV65702I	1008	3439
750	300	SITADV753009	477	1628
	402	SITADV7540I2	636	2170
	504	SITADV7550I5	795	2713
	606	SITADV7560I8	954	3255
920	708	SITADV75702I	1113	3798
	232	SITADV922307	44I	1505
	300	SITADV923009	567	1935
	402	SITADV9240I2	756	2579

Height (mm)	Width (mm)	Model	Watts Δt 50°C	Btu's Δt 50°C
920	504	SITADV9250I5	945	3224
	606	SITADV9260I8	1134	3869
	708	SITADV92702I	1323	4514
	810	SITADV928I24	1512	5159
1220	232	SITADVI22307	560	191I
	300	SITADVI23009	720	2457
	708	SITADVI2702I	1680	5732
	810	SITADVI28I24	1920	655I
1520	708	SITADVI5702I	2058	7022
	810	SITADVI58I24	2352	8025
1820	810	SITADVI88I24	2808	958I
2020	232	SITADV202307	917	3129
	300	SITADV203009	1179	4023
	708	SITADV20702I	275I	9386
2020	810	SITADV208I24	3144	10727


*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOVIW (white), PROMOVIC (chrome).

*Saving based on the value of individual items when bought separately. Order any of our selected valves & matching pipe covers at the same time as your radiator; PROMOVIW (white), PROMOVIC (chrome).
























SITAR single VERTICAL
SITAR single HORIZONTAL

Fitting Instructions

Accessories not included

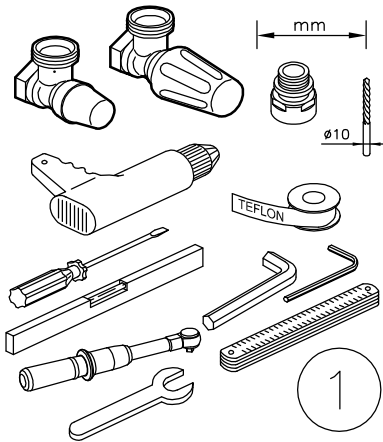

Accessories included

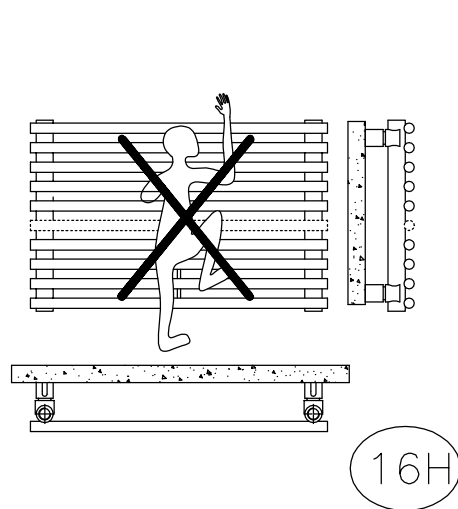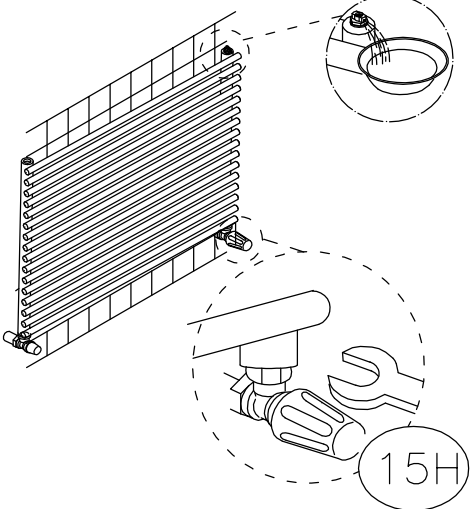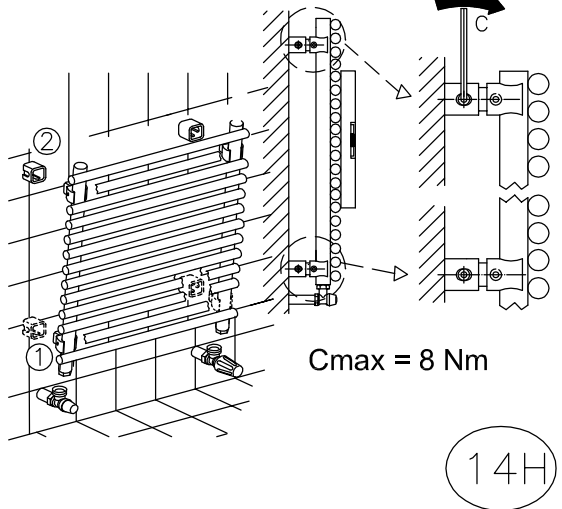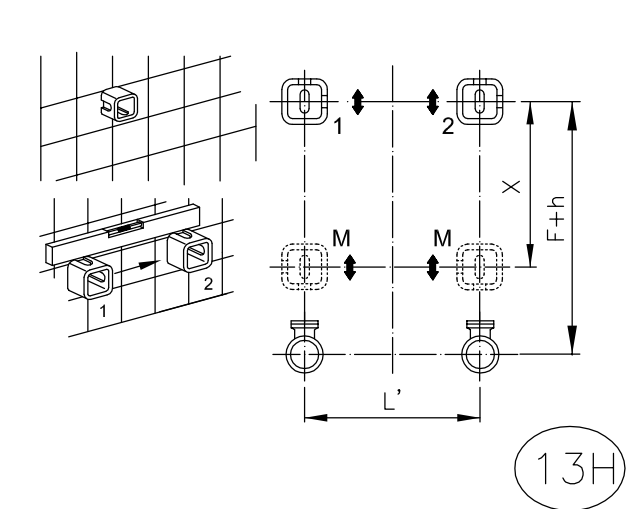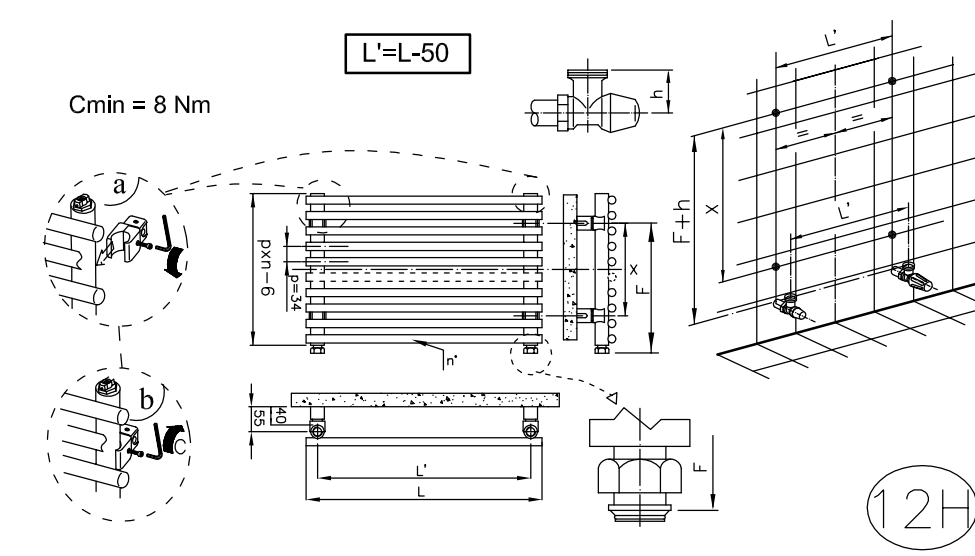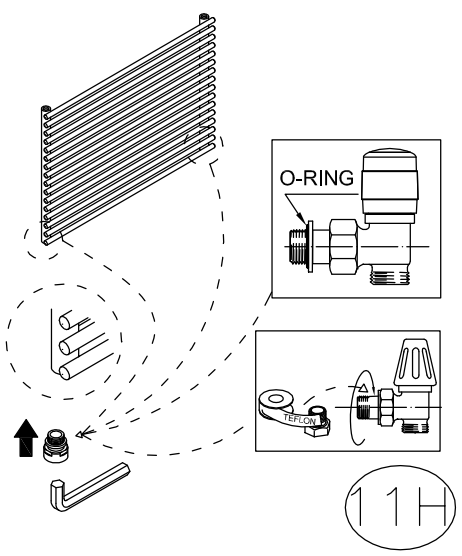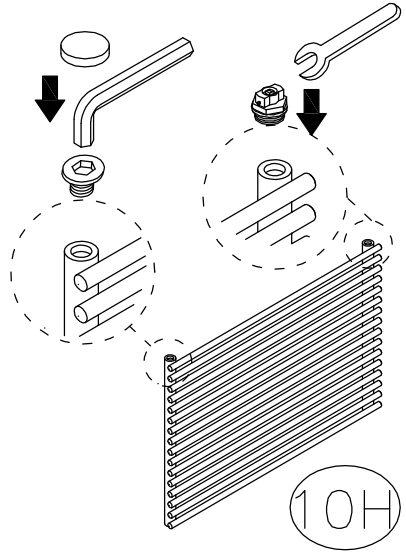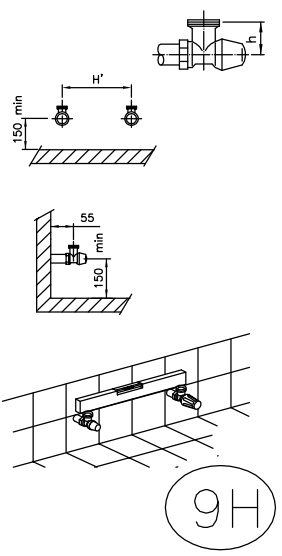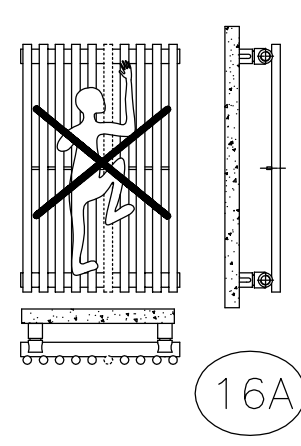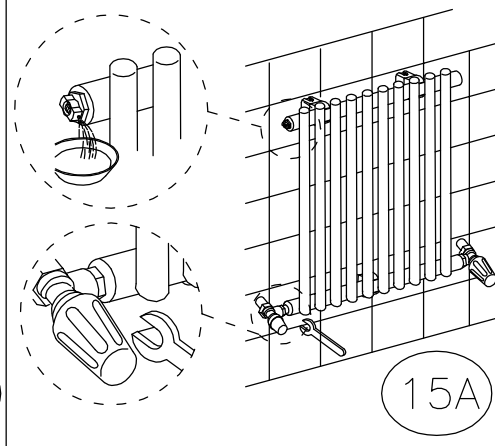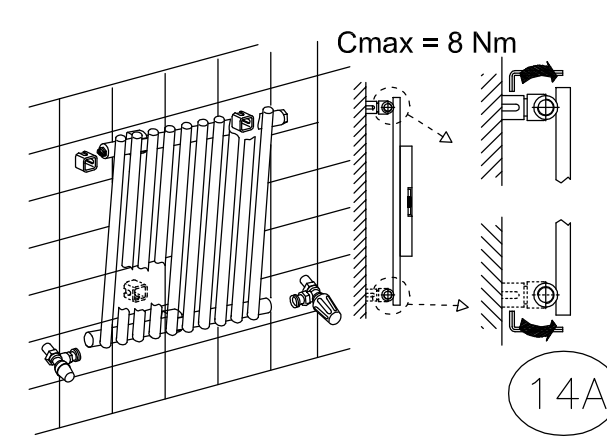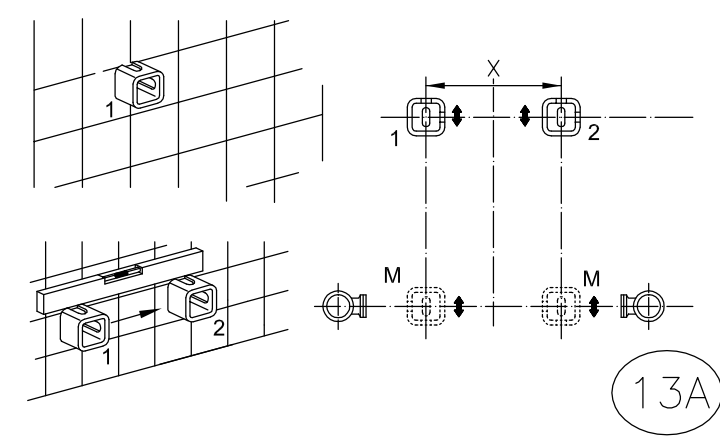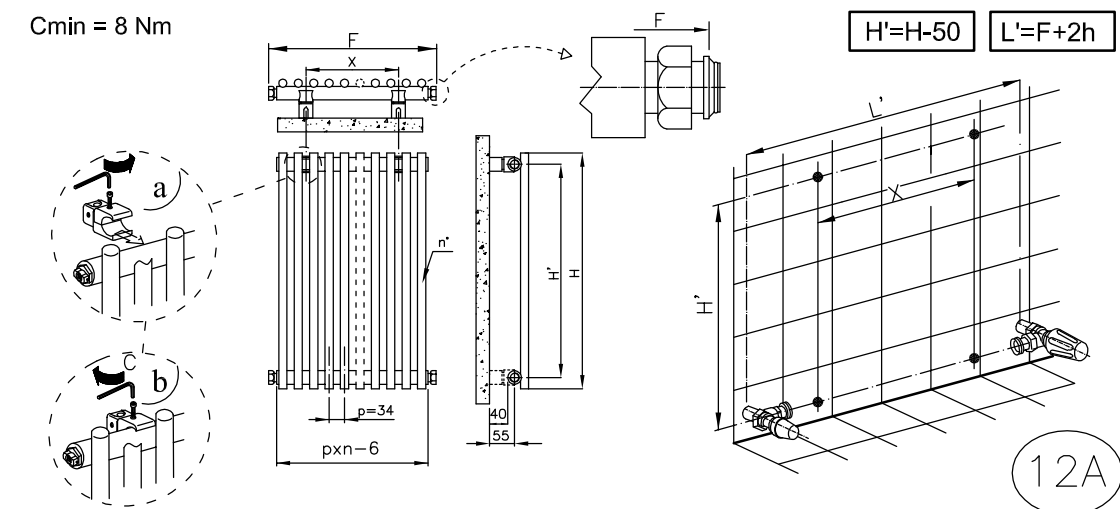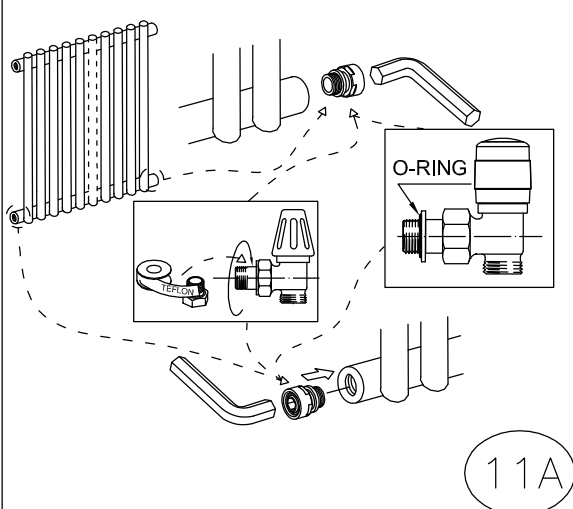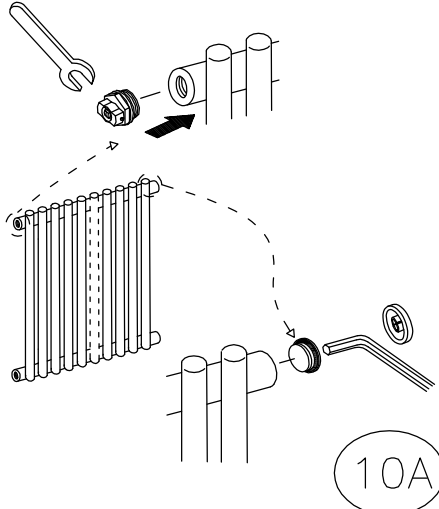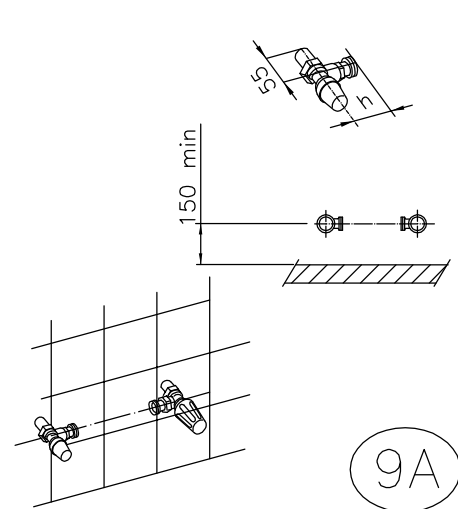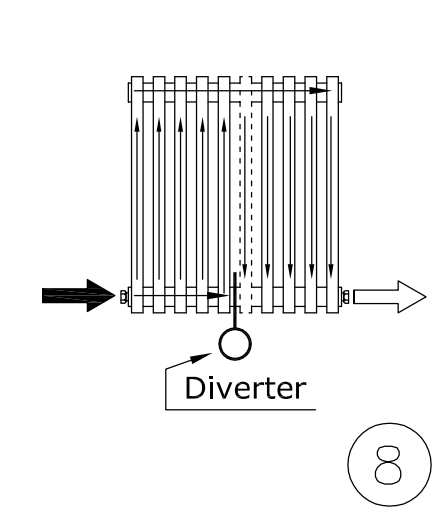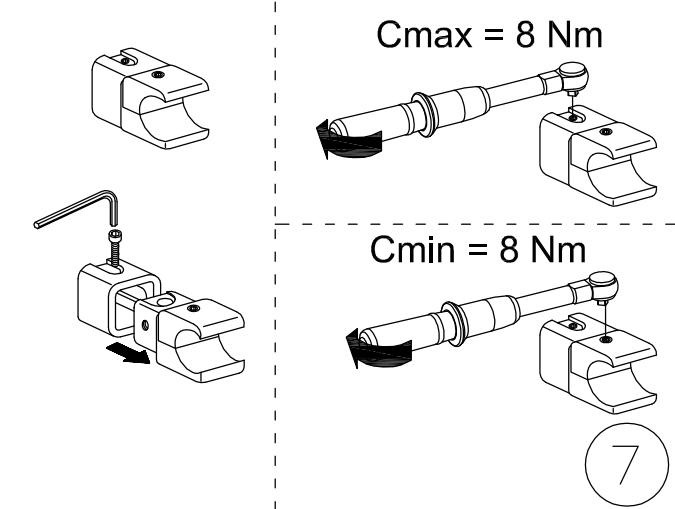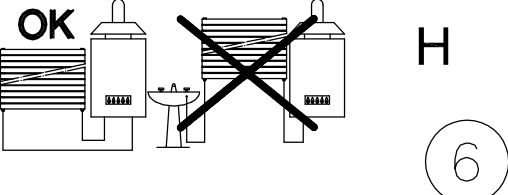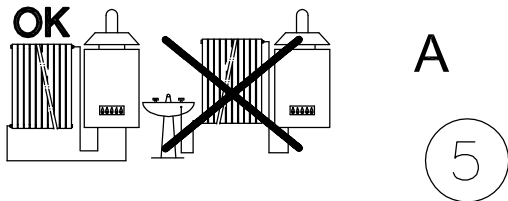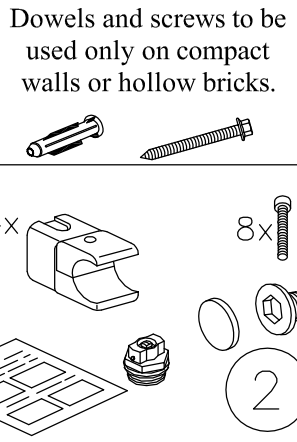

COMMISSION

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer’s guarantee.

TECHNICAL SPECIFICATIONS

Materials	Mild Steel.
Connections	½ flow and return.
Test pressure	6 Bar
Testing authority	EN 442
Maximum operating pressure	4 Bar
Maximum working temperature	95°C
Packaging	Wrapped in polyethylene with cardboard box.
PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system.	

TERMS & CONDITIONS

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage.

The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

GUARANTEES & LIABILITIES

This product is guaranteed for 10 years . The guarantee is subject to the product being installed in accordance with British and or European standards as well as these fitting instructions. The guarantee in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU


A brand of **IRSAP SPA**, Italy’s leading manufacturer of design led radiators.

If you have any questions please contact us on 01342 302250
www.theradiatorcompany.co.uk









SITAR double VERTICAL
SITAR double HORIZONTAL

Fitting Instructions






















Accessories not included

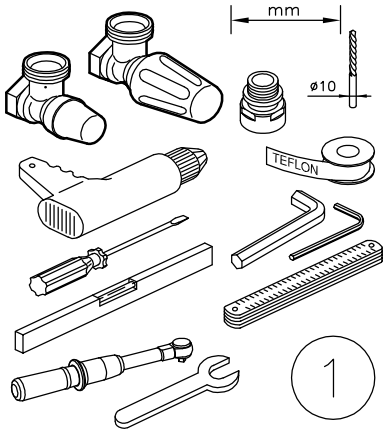

Accessories included

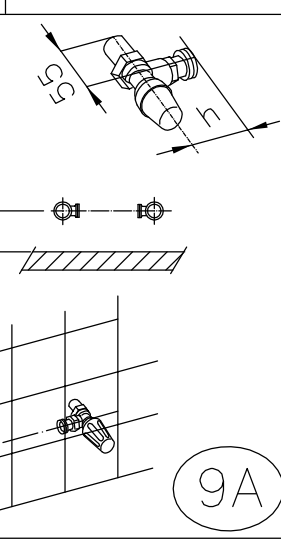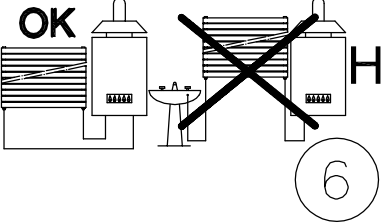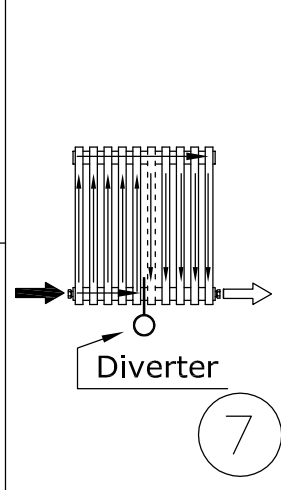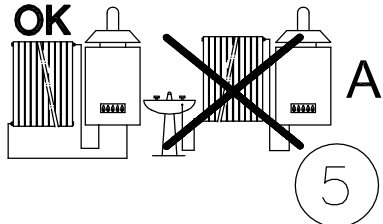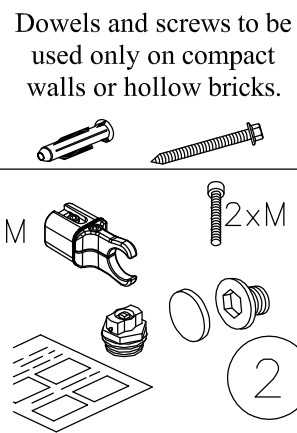

n° sections	
H	2÷29 30÷33 34÷36 37÷40
M	
520 ÷ 1820	4 4 4 4
2020	4 4 4 6

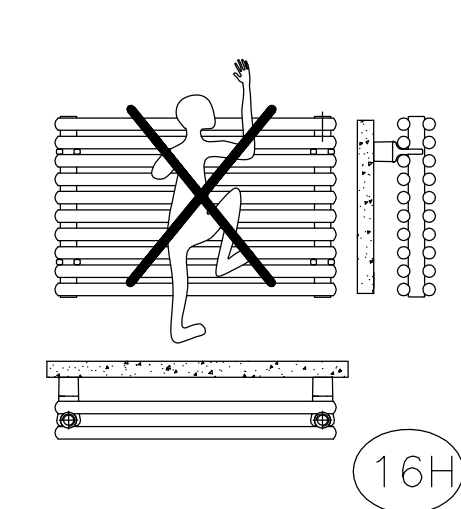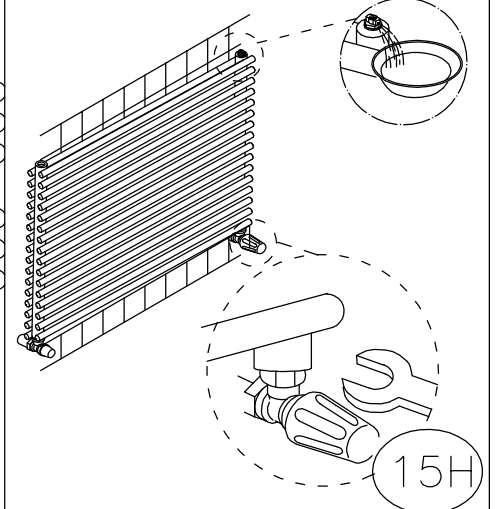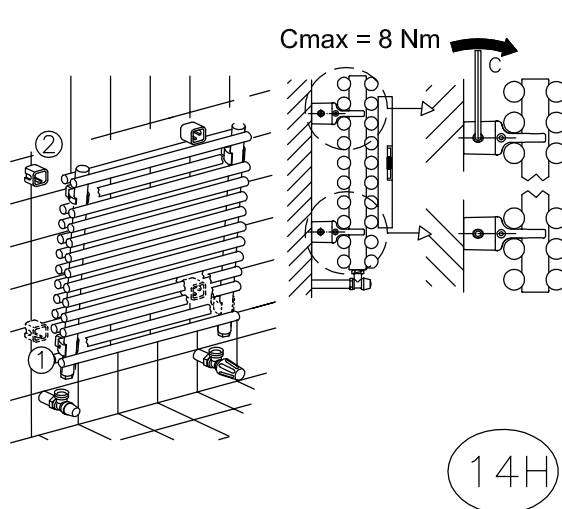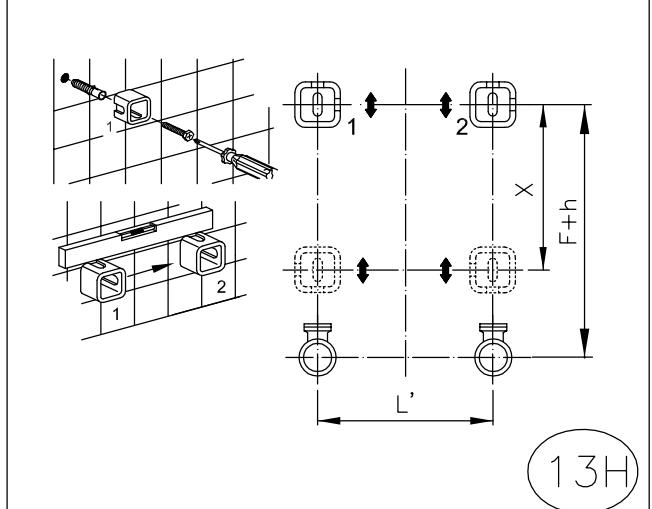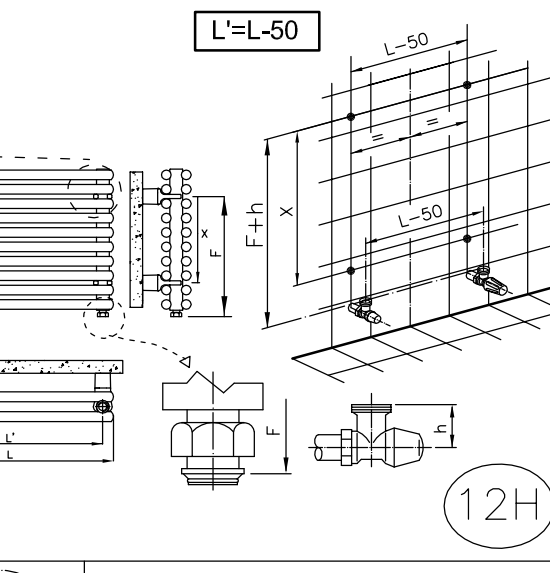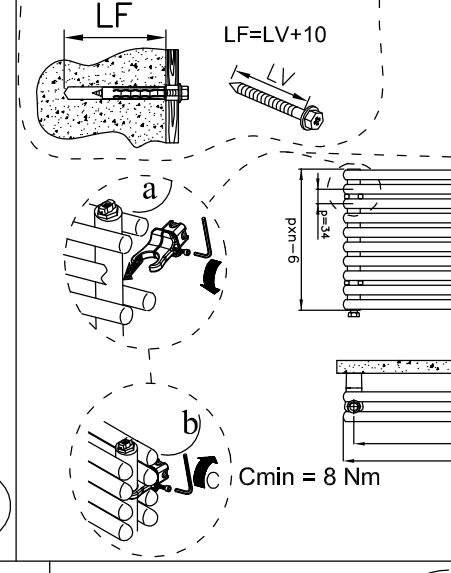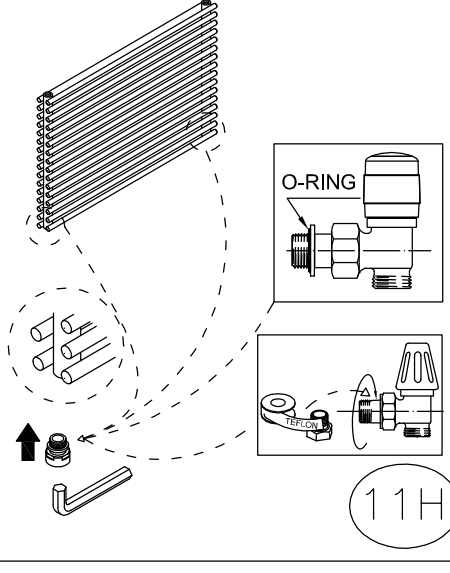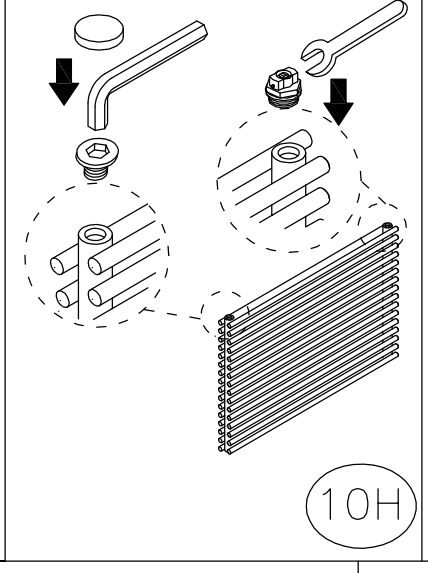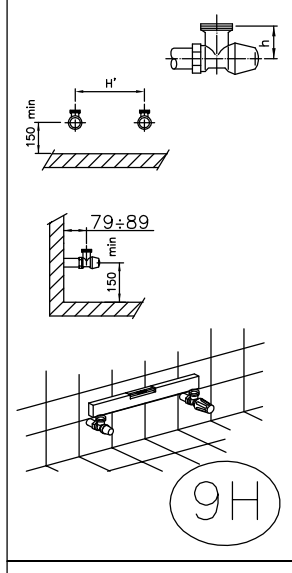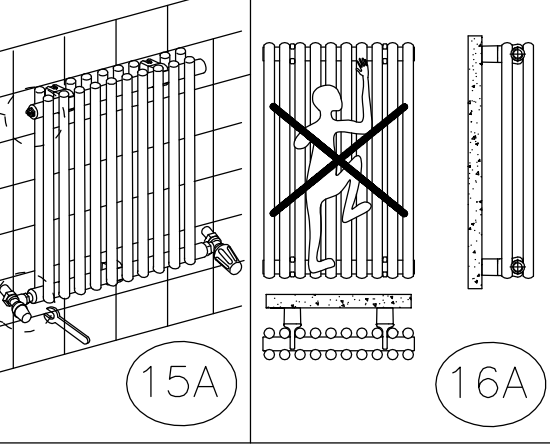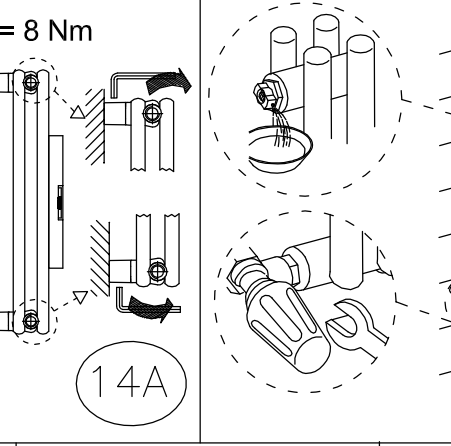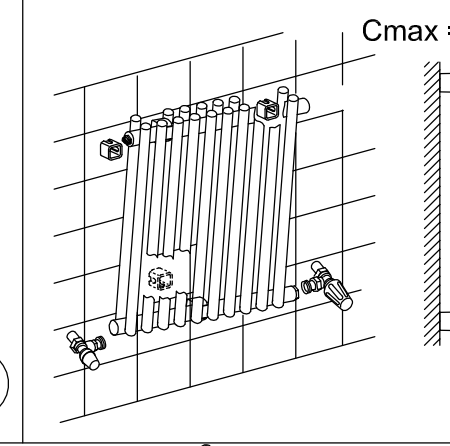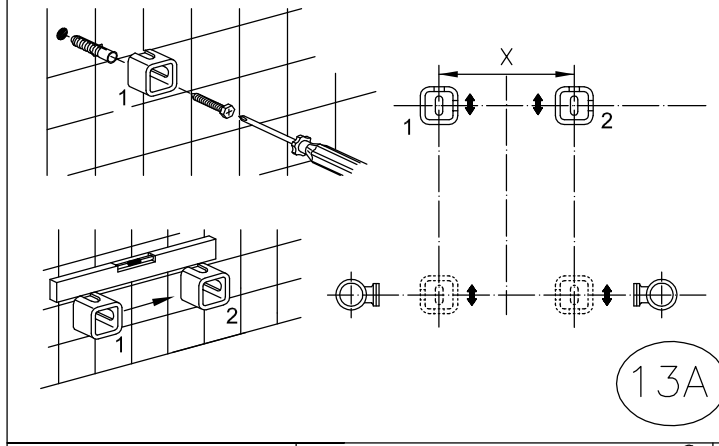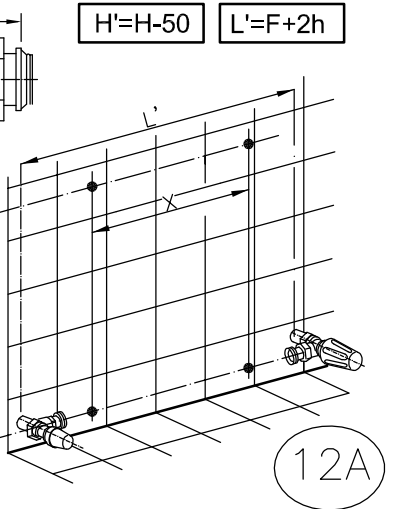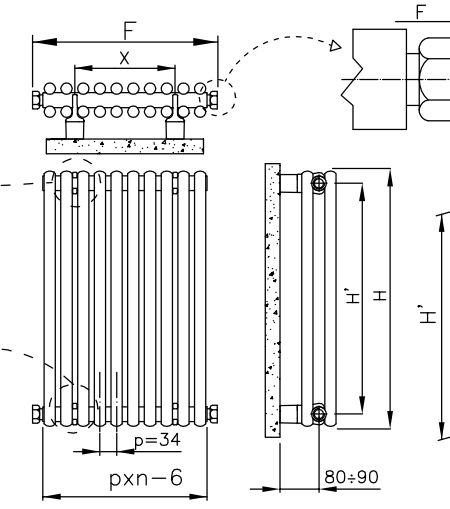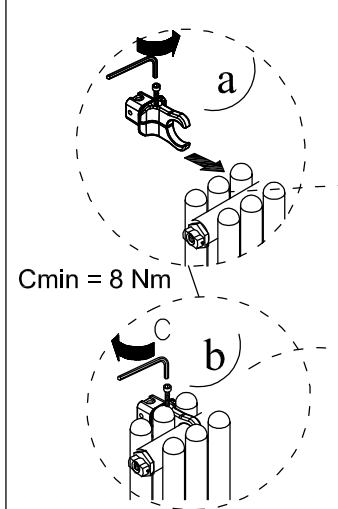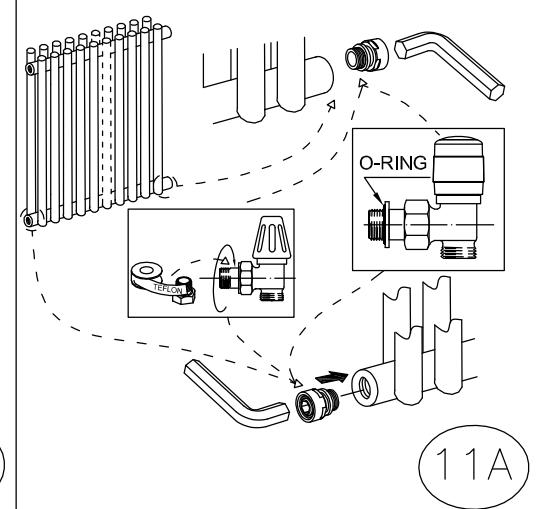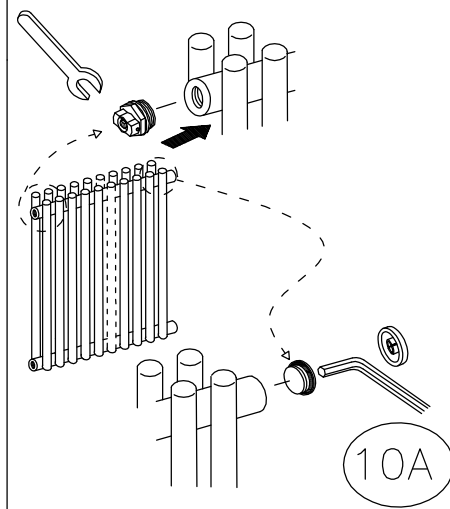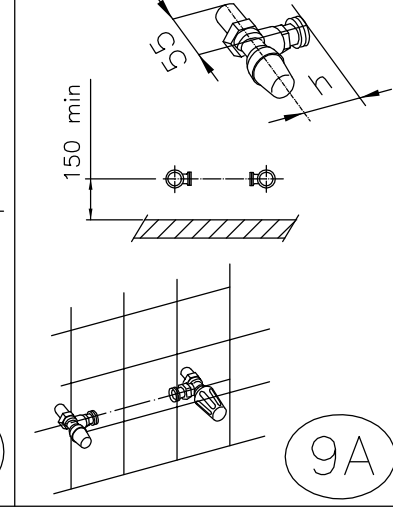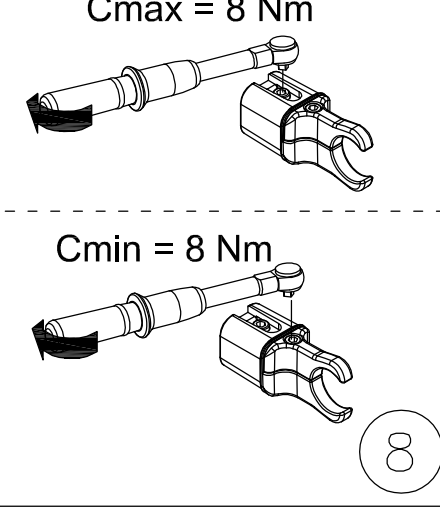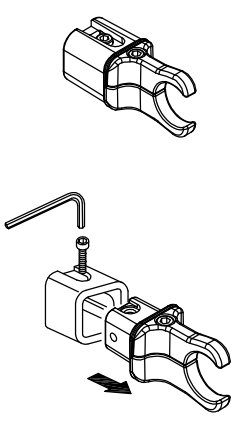

COMMISSION

Please Note: In accordance with Part L1 2006 of the Building Regulations and BS7593:1992 code of practice for the treatment of hot water and central heating systems, we strongly recommend flushing the heating system post installation of new radiators and then adding the correct quantity and type of inhibitor for use with your radiator and system to prevent corrosion. Damage caused to systems not protected by a suitable inhibitor will not be covered by manufacturer’s guarantee.

TECHNICAL SPECIFICATIONS

Materials	Mild Steel.
Connections	½ flow and return.
Test pressure	6 Bar
Testing authority	EN 442
Maximum operating pressure	4 Bar
Maximum working temperature	95°C
Packaging	Wrapped in polyethylene with cardboard box.
PLEASE NOTE: Systems using micro bore pipework must have adequate pressure and flow rates for the number and style of radiators on the system.	

TERMS & CONDITIONS

All products must be inspected once removed from the packaging and The Radiator Company notified within 28 days of delivery of any scratches, blemishes or other damage.

The Radiator Company will then replace the radiator.

Imperfect radiators should therefore not be fitted and The Radiator Company will not accept responsibility for replacement of scratched or damaged radiators once they have been fitted. This includes any consequential loss or cost of fitting.

If The Radiator Company are not notified within 28 days of the date on the signed delivery note then it will be deemed that The Radiator Company have fully complied with its obligations and claims will not be considered.

Failure to comply with any of the above may invalidate any claims.

We recommend that after you check the product on delivery that it is stored in its packaging to prevent damage prior to installation. The Radiator Company cannot accept responsibility for items damaged after delivery.

GUARANTEES & LIABILITIES

This product is guaranteed for 10 years . The guarantee is subject to the product being installed in accordance with British and or European standards as well as these fitting instructions. The guarantee in all cases are restricted to the free of charge replacement or repair of the failed product only. Our liability will under no circumstances extend beyond the repair or replacement of the product supplied by us. Claims for either labour in replacement or damage to property are not admissible. Any goods that are returned, in the event of a problem, will belong to The Radiator Company.

The Radiator Company
Units 13 - 14 Charlwoods Road
East Grinstead
West Sussex
RH19 2HU

A brand of **IRSAP SPA**, Italy’s leading manufacturer of design led radiators.

If you have any questions please contact us on 01342 302250
www.theradiatorcompany.co.uk