

BABYLA

SATIN STAINLESS STEEL

design Mariano Moroni

15 YEARS WARRANTY

MATERIAL:

Vertical collectors in satin stainless steel with ø of 38 mm. Horizontal heating elements in satin stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice. The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. User notice included.


FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years. Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



KIT ELITE SATIN STAINLESS STEEL





(*) Elegant square

satin valve kit pipe

centres 50 mm

with thermostatic

head



N° 2 hooks for

hanging clothes

satin stainless steel

Ø 20 mm

Pression maximale de service: 8 bar

Température maximale de service: 110° C Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz



N° 3 shelves

(2 on the left,

1 on the right)



N° 1 antenna for

hanging clothes

KIT ELITE Satin (only for Babyla H 1500)

510200000104

Art. Nr.

N° 1 mirror N° 1 shelf for books

(*) Either when buying the "Elite kit" or the single valve, always specify in the order, the connection needed: copper or multilayer.

ACCESSORIES



Elegant square satin valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15 Art. Nr. 5991990320201

Multilayer connection Ø 16 Art. Nr. **5991990320200**



Elegant manual square satin valve

Copper connection Ø 12/14/15 Art. Nr. **5991990320209**

Multilayer connection Ø 16 Art. Nr. **5991990320208**



Kit 2 hooks satin stainless steel

Art. Nr. 5991990010224



Art. Nr. 510300000058




176÷180

ø37

CORDIVARI

INOX STYLE

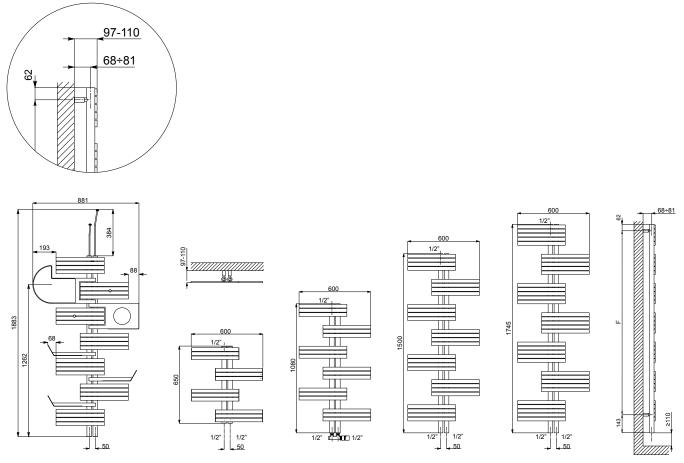

Dimensions and volume of the satin elite kit (only for the 1500 mm height version).



BABYLA SATIN STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Fixing kit centres	Dry Weight	Surface	Water Content		l output att	Exponent n
	H [mm]	L [mm]	I [mm]	F [mm]	[Kg]	[m ²]	[lt]	∆t = 50°C	∆t = 30°C	
3551730130004	650	600	50	445	5,5	0,51	2,3	167	89	1,2235
3551730130001	1080	600	50	875	8,8	0,83	3,2	250	133	1,2351
3551730130002	1500	600	50	1275	13,3	1,25	4,5	357	187	1,2686
3551730130003	1745	600	50	1540	16,9	1,53	6,0	432	223	1,2904



BABYLA

POLISHED STAINLESS STEEL

design Mariano Moroni

15 YEARS WARRANTY

MATERIAL: Vertical collectors in polished stainless steel with ø of 38 mm. Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice. The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years. Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



Pression maximale de service: 8 bar

Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz

ACCESSORIES



Elegant square polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15 Art. Nr. 5991990301076

Multilayer connection Ø 16 Art. Nr. 5991990301075



Elegant square manual polished valve kit

Copper connection Ø 12/14/15 Art. Nr. **5991990301084**

Multilayer connection Ø 16 Art. Nr. 5991990301083



Kit 2 hooks polished stainless steel

Art. Nr. 5991990010223

Sleeving kit for Pipe Centres 50 mm - valves

polished

11


Art. Nr. 510300000057




176÷180

ø37

CORDIVARI



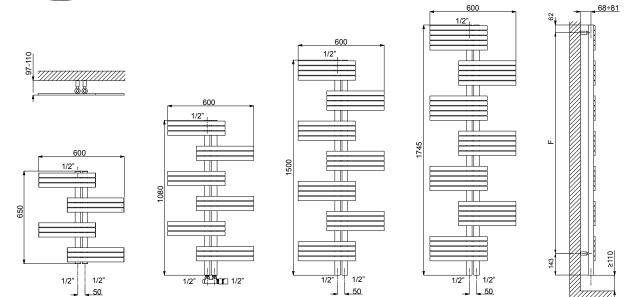

BABYLA POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres	Fixing kit centres	Dry Weight	Surface	Water Content		l output att	Exponent	
	H [mm]	L [mm]	l [mm]	F [mm]	[Kg]	[m ²]	[lt]	Δt = 50°C	∆t = 30°C	n	
3551730130014	650	600	50	445	5,5	0,51	2,3	156	83	1,2246	
3551730130011	1080	600	50	875	9,2	0,83	3,4	233	124	1,2351	
3551730130012	1500	600	50	1275	13,3	1,25	4,5	333	174	1,2687	
3551730130013	1745	600	50	1540	16,9	1,53	6,0	395	204	1,2904	



BABYLA

GOLD POLISHED STAINLESS STEEL

design Mariano Moroni

MATERIAL:

Vertical collectors in polished stainless steel with ø of 38 mm. Horizontal heating elements in polished stainless steel 30x10 mm.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice. The kit is certified from TÜV in compliance with VDI 6036-class 4.

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

FEATURES:

It is totally made in stainless steel with an unalterable finishing guaranteed during the years. Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

PRODUCT CERTIFICATES



Pression maximale de service: 8 bar

Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz

ACCESSORIES



Elegant square gold polished valve kit pipe centres 50 mm with thermostatic head - right

Copper connection Ø 12/14/15 Art. Nr. 5991990301089

Multilayer connection Ø 16 Art. Nr. **5991990301091**




Elegant square manual polished gold valve kit



Multilayer connection Ø 16 Art. Nr. **5991990301055** Sleeving kit for Pipe Centres 50 mm - valves polished gold

5 YEARS WARRANTY

Art. Nr. 510300000087





Measures for valves type Cordivari Elegant Square with thermostatic head and pipe centres 50 mm









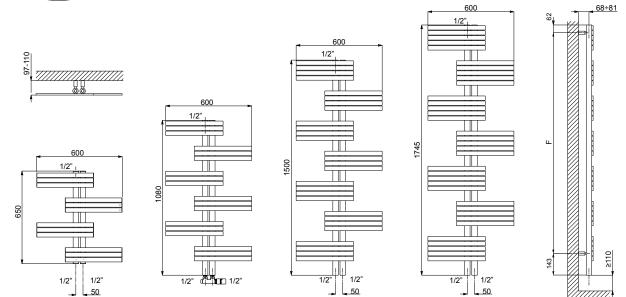

BABYLA GOLD POLISHED STAINLESS STEEL

Art. Nr.	Height	Width	Pipe Centres I [mm]	Fixing kit centres F [mm]	Dry Weight [Kg]	Surface [m ²]	Water Content [lt]	Thermal output Watt		Exponent
	H [mm]	L [mm]						∆t = 50°C	∆t = 30°C	– n
3551730130024	650	600	50	445	5,5	0,51	2,3	156	83	1,2246
3551730130021	1080	600	50	875	9,2	0,83	3,4	233	124	1,2351
3551730130022	1500	600	50	1275	13,3	1,25	4,5	333	174	1,2687
3551730130023	1745	600	50	1540	16,9	1,53	6,0	395	204	1,2904