



HAND®

EUROPEAN
WARRANTY

MATERIAL:

Super slim heating body in painted carbon steel.

FIXING KIT:

Brackets, airvent, hexagonal tool, plugs and screws for mounting suitable for use on compact or hollow brick, user notice, fixing template scheme. The kit is certified from TÜV in compliance with VDI 6036-class 4.

VALVE KIT INCLUDES:

Valves

Fittings for copper pipe (Ø 12/14/15)

Fittings for multilayer pipe (Ø 16)

PACKAGING:

The radiator is protected by a film in polyethylene and with a carton box. User notice included.

PAINTING PROCESS:

Painted with ecological epoxy. (Certificate DIN 55900-1,-2).

Thermal outputs certified in accredited laboratories in compliance with European norm EN442.

COLOURS:

Radiator and accessories: standard white colour R01.

PRODUCT CERTIFICATES




Pression maximale de service: 5 bar



Température maximale de service: 110° C

Available for central heating systems

Connexions: n° 2 x 1/2" gaz - n° 1 x 1/2" gaz

AWARDS

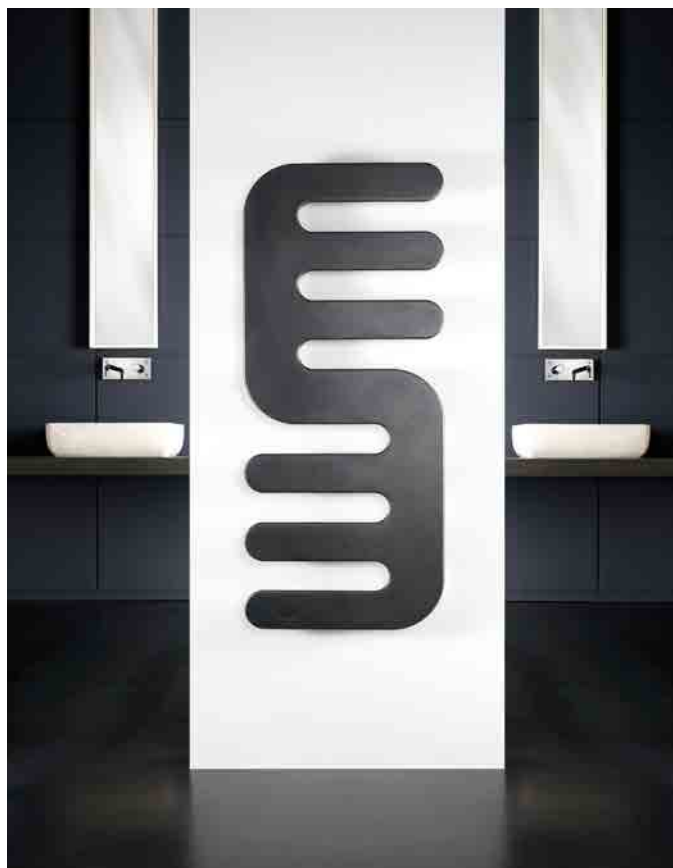

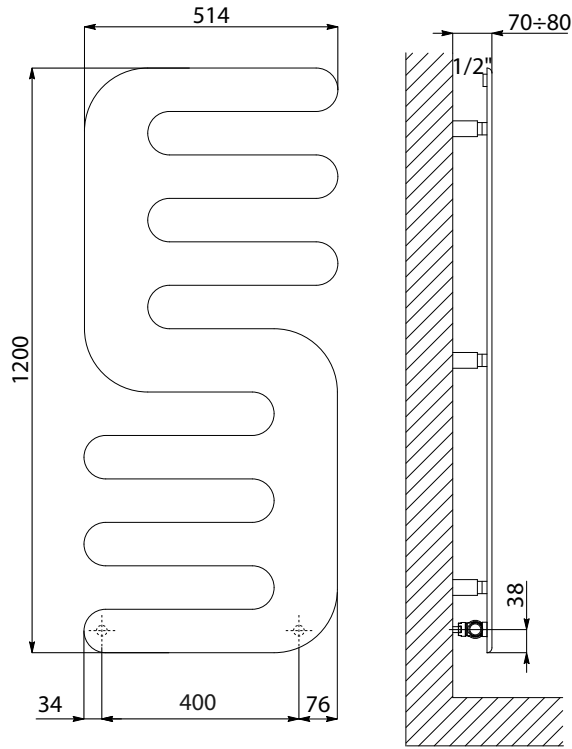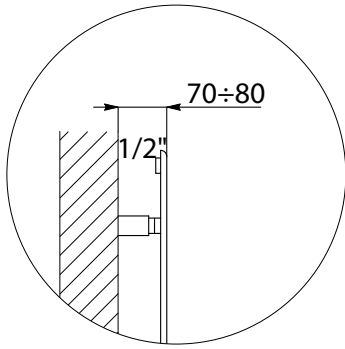

HAND®

| Art. Nr. | Height | Width | Pipe Centres | Dry Weight | Surface | Water Content | Thermal output Watt | | Exponent n |
|---------------|-------------|--------|--------------|------------|-------------------|---------------|---------------------------------|---------------------------------|------------|
| | H [mm] | L [mm] | l [mm] | [Kg] | [m ²] | [lt] | $\Delta t = 50^{\circ}\text{C}$ | $\Delta t = 30^{\circ}\text{C}$ | |
| 3540806100011 | 1200 | 514 | 400 | 15,5 | 0,76 | 1,3 | 490 | 259 | 1,2475 |

Art. Nr. are referred to colour WHITE R01 - version.

Includes valves.

For output at different Δt than 50°C , please refer to the following formula: desired output = output at $\Delta t 50^{\circ}\text{C}$ x (desired $\Delta t/50$)ⁿ